

product: DELPHI PN 15304723
 material: CUSN3ZN9
 surface: SN
 material thickness: 0,30 mm
 cross section [mm²]: 0,75 | 1,0

 strip length: 4,60 mm
 cable type: FLRY-B
 insulation ø [mm]: 1,70 - 2,10
 seal:

**Uncontrolled
Copy**
For Information only!


conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm ²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLRY-B	0,75	24 x 0,21	1,80	120	1,25	2,10	2,50	2,70		
FLRY-B	1,0	32 x 0,21	2,00	160	1,40	2,10	2,60	2,70		

core:
 C-2.00-3.5-8
 DPN 10713770


insulation:
 I-2.50-2.5-10
 DPN 10713827

anvil:
 AS-2.00-2.50-6.8-3.0-0.4
 DPN 10783444

two piece anvil:
 AC-2.00-3.75
 DPN 10803507
 AI-2.50-3.2-0.4
 DPN 10763838

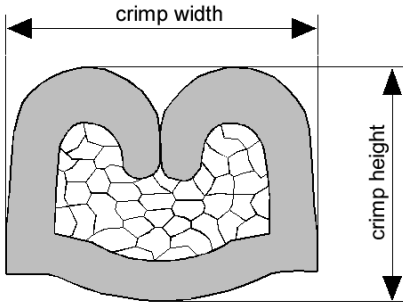


DELPHI PN 15304723

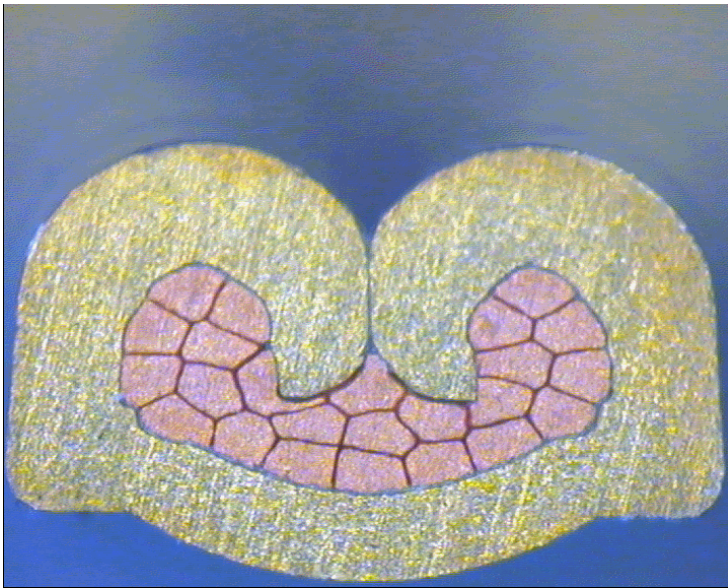

cable:
 $0,75 \text{ mm}^2 = 24 \times 0,21 \text{ mm}$

crimp height:
1,25 mm

crimp width:
2,10 mm

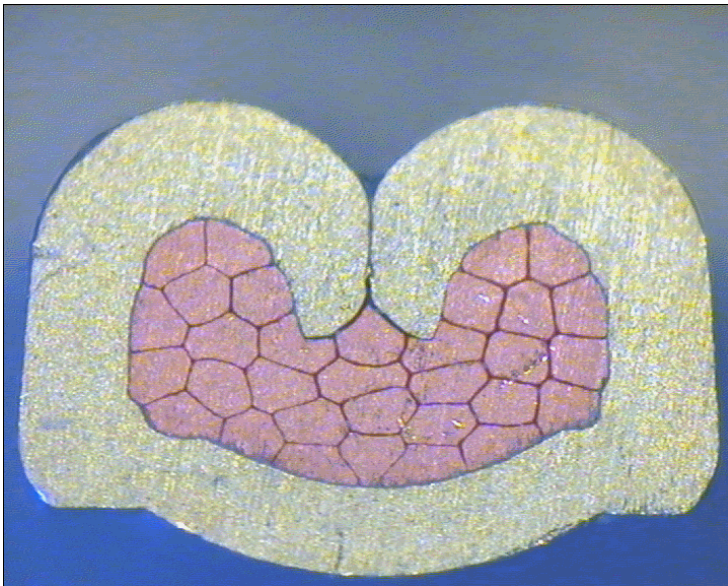

cable:
 $1,00 \text{ mm}^2 = 32 \times 0,21 \text{ mm}$

crimp height:
1,40 mm

crimp width:
2,10 mm