

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number:

0015247140

Status:

Active

Overview:

Mini-Fit Family Power Connectors

Description:

Mini-Fit BMI Receptacle Header, 4.20mm Pitch, Dual Row, Vertical, with Snap-In Plastic Pegs, Post 2.54µm Tin (Sn), UL 94V-2, 14 Circuits

Documents:

- [3D Model \(PDF\)](#)[Test Summary 423850000-TS-000 \(PDF\)](#)
- [3D Model](#)[Test Summary TS-5556-002-001 \(PDF\)](#)
- [Drawing \(PDF\)](#)[Symbol Footprint Data SYM-A42385-14XX \(PDF\)](#)
- [Product Specification PS-5556-002-001 \(PDF\)](#)[RoHS Certificate of Compliance \(PDF\)](#)
- [Packaging Specification PK-42385-999-001 \(PDF\)](#)

Agency Certification

CSA

LR19980

UL

E29179

General

Product Family

PCB Receptacles

Series

42385

Application

Board-to-Board, Power, Wire-to-Board

Comments

Solder Type|With Pegs

Overview

Mini-Fit Family Power Connectors

Product Name

Mini-Fit BMI

UPC

800753535053

Physical

Circuits (Loaded)

14

Circuits (maximum)

14

Color - Resin

Natural

Durability (mating cycles max)

30

Flammability

94V-2

Glow-Wire Capable

No

Guide to Mating Part

Yes

Keying to Mating Part

None

Lock to Mating Part

None

Material - Metal

Brass

Material - Plating Mating

Tin

Material - Resin

Nylon

Net Weight

2.876/g

Number of Rows

2

Orientation

Vertical

PCB Locator

Yes

PCB Retention

Yes

PCB Thickness - Recommended

1.00mm

Packaging Type

Tray

Pitch - Mating Interface

4.20mm

Pitch - Termination Interface

4.20mm

Polarized to Mating Part

Yes

Polarized to PCB

Yes

Surface Mount Compatible (SMC)

No

Temperature Range - Operating

-40° to +105°C

Termination Interface: Style

Through Hole


Electrical

Current - Maximum per Contact

9.0A

Grounding to PCB

No

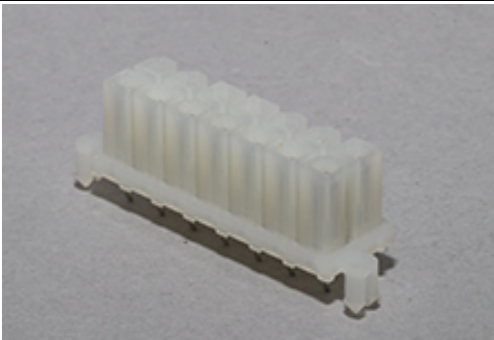

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

China RoHS

REACH SVHC

Not Contained Per -
D(2020)4578-DC (25
June 2020)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

Green Image

ELV

Not Relevant

RoHS Phthalates

Not Contained

Search Parts in this Series

42385 Series

Mates With

Panel Mount Plug 42475
Right Angle
Headers 42404 , 43810
Vertical
Headers 42440 , 43879 , 44068

Voltage - Maximum	600V AC (RMS)/DC
Solder Process Data	
Duration at Max. Process Temperature (seconds)	005
Lead-freeProcess Capability	WAVE
Max. Cycles at Max. Process Temperature	001
Process Temperature max. C	240
Material Info	
Engineering Number	42385-14A1
Reference - Drawing Numbers	
Packaging Specification	PK-42385-999-001
Product Specification	PS-5556-002-001
Sales Drawing	SDA-42385-X-001
Symbol/Footprint Data	SYM-A42385-14XX
Test Summary	423850000-TS-000, TS-5556-002-001

This document was generated on 07/15/2020

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION