1534404-2 - ACTIVE


AMP | AMP MCP 6.3/4.8K, AMP MCP Connector System

TE Internal #: 1534404-2 Housing for Female Terminals, Wire-to-Device / Wire-to-Wire / Wire-to-Board, 4 Position, .236 in [6 mm] Centerline, Gray, Power, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, UNSEALED CONNECTOR HOUSING

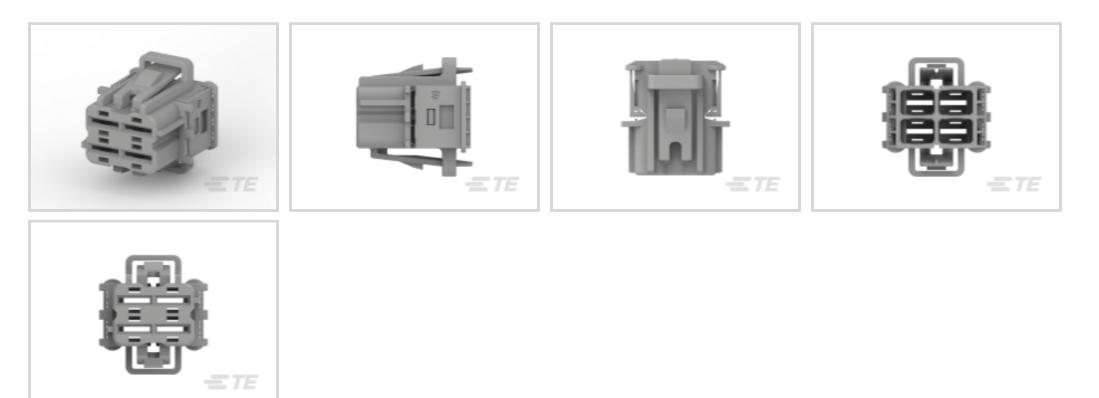

Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 6.3 mm [.248 in]

Connector System: Wire-to-Board, Wire-to-Device, Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 6 mm [.236 in]

All AMP MCP, UNSEALED CONNECTOR HOUSING (187)

Features

Product Type Features

Connector & Housing Shape	Rectangular	
Connector & Housing Type	Housing for Female Terminals	
Connector System	Wire-to-Board, Wire-to-Device, Wire-to- Wire	
Sealable	No	
Hybrid Connector	No	
Primary Locking Feature	On the Terminal	
Configuration Features		
Number of Positions	4	
Number of Rows	2	
Electrical Characteristics		
Operating Voltage	24 VDC	
Nominal Voltage Architecture	24 V	

Housing for Female Terminals, Wire-to-Device / Wire-to-Wire / Wire-to-Board, 4 Position, .236 in [6 mm] Centerline, Gray, Power, Hybrid



Body Features

Cable Exit Angle	180°	
Body Material	PBT GF	
Primary Product Color	Gray	
Connector Code	В	
Contact Features		
Contact Size	6.3mm	
Contact Type	Receptacle	
Mating Tab Width	6.3 mm[.248 in]	
Mechanical Attachment		
Terminal Position Assurance	Yes	
Strain Relief	Without	
Mating Alignment Type	Keyed	
Mating Alignment	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		

Centerline (Pitch)

6 mm[.236 in]

Dimensions

Product Width	24.36 mm[.959 in]	
Product Length	25 mm[.984 in]	
Product Height	22.8 mm[.898 in]	
Row-to-Row Spacing	4.24 mm[.167 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]	
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]	
Operation/Application		
Circuit Application	Power	
Industry Standards		
UL Flammability Rating	UL 94HB	
Packaging Features		
Packaging Quantity	1200	

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Device / Wire-to-Wire / Wire-to-Board, 4 Position, .236 in [6 mm] Centerline, Gray, Power, Hybrid



Packaging Method	Carton	
Other		
Serviceable	Yes	
Connector Position Assurance Capable	No	
Product Compliance For compliance documentation, visit the product page on TE.com> EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223)	

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Halogen Content

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts


Housing for Female Terminals, Wire-to-Device / Wire-to-Wire / Wire-to-Board, 4 Position, .236 in [6 mm] Centerline, Gray, Power, Hybrid






TE Part # CAT-AM705-T273 AMP MCP, RECEPTACLE AND TAB

Also in the Series AMP MCP 6.3/4.8K

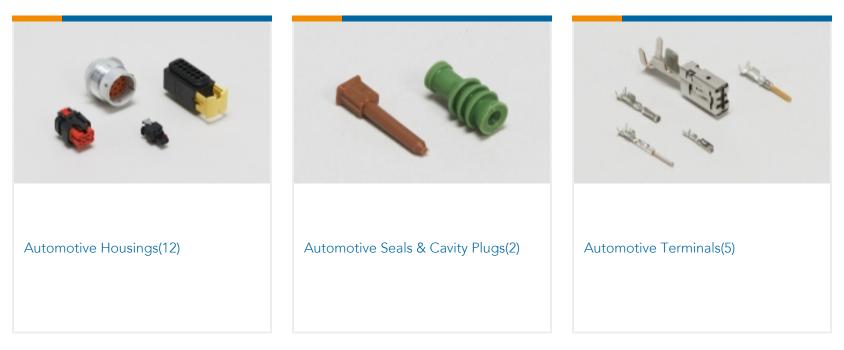

Also in the Series AMP MCP Connector System

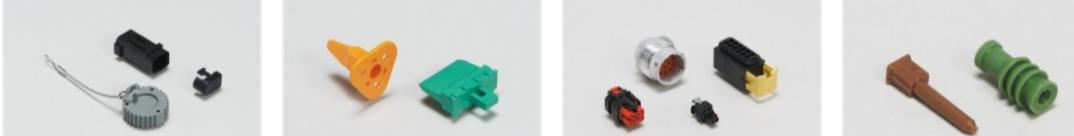

Automotive Connector Caps & Covers (24)	Automotive Connector Locks & Position Assurance(7)	Automotive Housings(352)	Automotive Seals & Cavity Plugs(6)
And a set of the set o			
Automotive Terminals(125)	Insertion & Extraction Tools(13)	Other Automotive Connector Accessories(2)	PCB Headers & Receptacles(29)

Customers Also Bought

Housing for Female Terminals, Wire-to-Device / Wire-to-Wire / Wire-to-Board, 4 Position, .236 in [6 mm] Centerline, Gray, Power, Hybrid







Documents

Product Drawings MCP6.3 RECEP HSG4P

English

CAD Files **Customer View Model** ENG_CVM_1534404-2_A2.3d_igs.zip

English

Customer View Model

ENG_CVM_1534404-2_A2.3d_stp.zip

English

Customer View Model

ENG_CVM_1534404-2_A2.2d_dxf.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Engineering Specification

English