

VAL-U-LOK

TE Internal #: 1586041-2 Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, .165 in [4.2 mm] Centerline, Printed Circuit Board, UL 94V-2 View on TE.com >

connectivity

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: Header

Connector & Housing Type: Plug

Connector System: Wire-to-Board

Number of Positions: 2

Centerline (Pitch): 4.2 mm [.165 in]

Features

Product Type Features

Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	2
PCB Mount Orientation	Right Angle
Number of Power Positions	2
Number of Rows	2
Electrical Characteristics	
Operating Voltage	600 VAC
Contact Features	
Contact Layout	Inline

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, .165 in [4.2 mm] Centerline, Printed Circuit Board, UL 94V-2



Contact Current Rating (Max)	9 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Tin
Contact Mating Area Plating Material Thickness	2.03 – 5.08 μm[80 – 200 μin]
Termination Features	
Termination Post & Tail Length	3.6 mm[.14 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Mating Alignment Type	Keyed
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Mating Retention	With

Latch

Housing Features

Mating Retention Type

Centerline (Pitch)	4.2 mm[.165 in]
Housing Color	Natural
Housing Material	Nylon
Dimensions	
Insulation Diameter (Max)	2.39 mm[2.39 in]
Row-to-Row Spacing	4.2 mm[.165 in]
PCB Thickness (Recommended)	.06 mm[1.6 in]
Width	13 mm[.51 in]
Accepts Wire Insulation Diameter Range	1.2 – 3.1 mm[.047 – .122 in]
Height	9.8 mm[.386 in]
Length	5.4 mm[.213 in]
Usage Conditions	
Operating Temperature Range	-40 – 105 °C[-40 – 221 °F]
Operation/Application	

C For support call+1 800 522 6752

07/20/2022 10:35AM | Page 2

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, .165 in [4.2 mm] Centerline, Printed Circuit Board, UL 94V-2



Assembly Integration Feature	Without
Circuit Application	Power
Identification Marking	
Circuit Identification Feature	With
Industry Standards	
UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard Number	E28476
Agency/Standard	CSA, UL
UL Rating	Recognized
CSA File Number	208567
VDE Tested	No
Packaging Features	
Packaging Method	Box & Tray, Tray
Packaging Quantity	690

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Not Yet Reviewed
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JUL 2021 (219) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Wave solder capable to 265°C
Product Compliance Disclaimer	

roduct Compliance Disclaime

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, .165 in [4.2 mm] Centerline, Printed Circuit Board, UL 94V-2



numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts



Customers Also Bought





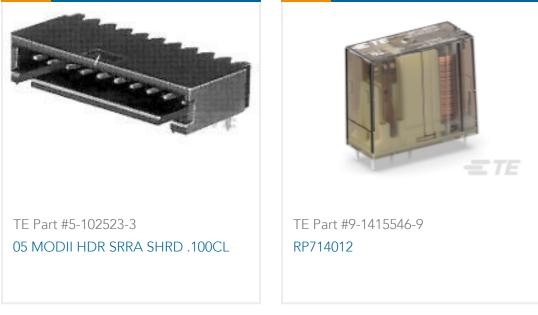

Documents

Product Drawings

C For support call+1 800 522 6752

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 2 Position, .165 in [4.2 mm] Centerline, Printed Circuit Board, UL 94V-2



2P VAL-U-LOK R/A HDR V2

English

CAD Files

Customer View Model

ENG_CVM_1586041-2_B.3d_stp.zip

English

Customer View Model

ENG_CVM_1586041-2_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_1586041-2_B.3d_igs.zip

English

3D PDF

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals UL Report

English