Crimp-Validation

DELPHI

product: DELPHI PN 15355521

material: CUZN5
surface: SN
material thickness: 0,80 mm

cross section [mm²]: 0,5

NOT FOR SENSITIVE APPLICATIONS
ONLY FOR SOLDERING

strip length: 5,50 mm

cable type: FLR7Y-A
insulation ø [mm]: 1,40 - 1,60

seal:

Uncontrolled Copy
For Information only!

conductor dimension					crimp dimension [mm]					
cable type	cross sect. [mm²]	struct. n x d [mm]	insul. diam. [mm]	tear-out force [N]	core		insulation			
					height ± 0,05	width ± 0,10	height ± 0,10	width ± 0,10	height ± tol.	width ± tol.
FLR7Y-A	0,5	19 x 0,19	1,50	80	2,00	3,15	2,70	3,75		

core:
C-3.00-5.5-19
DPN 10881993

insulation:
I-3.50-3.5-19
DPN 10713082

anvil:
AS-3.00-3.50-12.0-6.2-0.6
DPN 10915305

two piece anvil:

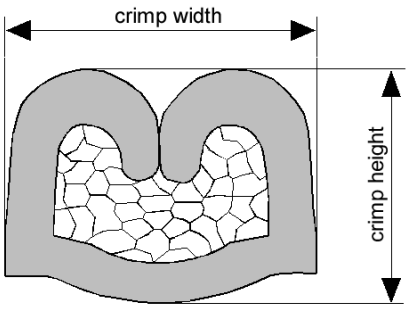

DELPHI PN 15355521

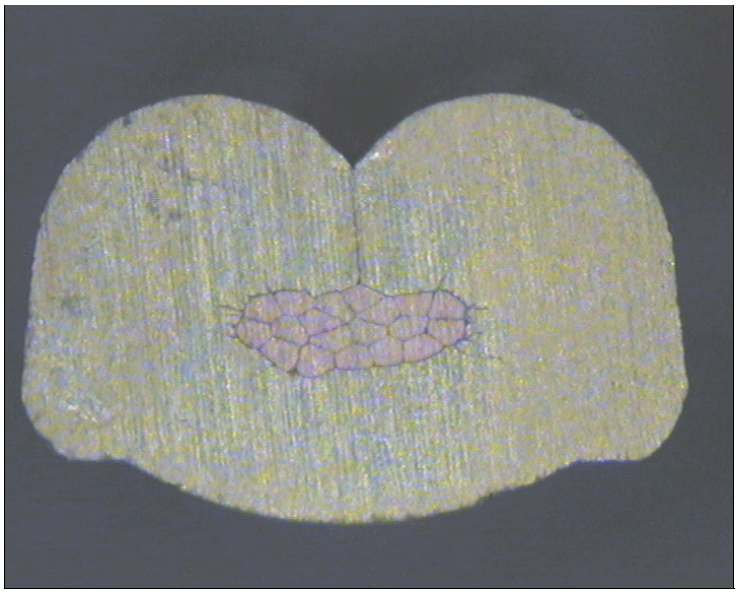

cable:
0,50 mm² = 19 x 0,19 mm

crimp height:
2,00 mm

crimp width:
3,15 mm