


TE Internal #: 1565986-1 DC Jack Connectors, Board-to-Board, 5 Position, 2.5 mm [.098 in] Centerline, Receptacle, 30 VDC, Vertical, Printed Circuit Board, Power & Signal

### View on TE.com >



Connectors > PCB Connectors > Battery Connectors & Holders > DC Jack Connectors

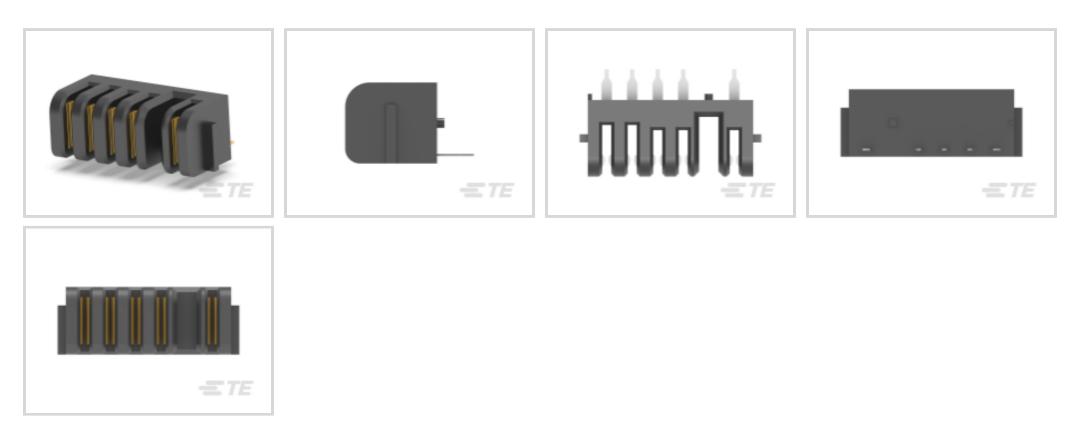

Connector System: Board-to-Board

Number of Positions: 5

Centerline (Pitch): 2.5 mm [.098 in]

Connector & Housing Type: Receptacle

Operating Voltage: 30 VDC

### Features

### Product Type Features

Connector System	Board-to-Board
Connector & Housing Type	Receptacle
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	5
PCB Mount Orientation	Vertical
Electrical Characteristics	
Operating Voltage	30 VDC
Contact Features	
Contact Current Rating (Max)	7 A
Mechanical Attachment	
PCB Mount Retention	With
PCB Mount Retention Type	Locating Post

### 1565986-1

DC Jack Connectors, Board-to-Board, 5 Position, 2.5 mm [.098 in] Centerline, Receptacle, 30 VDC, Vertical, Printed Circuit Board, Power & Signal



Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2.5 mm[.098 in]
Usage Conditions	
Operating Temperature Range	-20 – 80 °C[-4 – 176 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Quantity	72
Packaging Method	Tray
<b>Product Compliance</b> For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224)

(224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed Not Low Halogen - contains Br or Cl > 900

ppm.

Reflow solder capable to 245°C

Halogen Content

Solder Process Capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

## **Compatible Parts**

**&** For support call+1 800 522 6752

### 1565986-1

DC Jack Connectors, Board-to-Board, 5 Position, 2.5 mm [.098 in] Centerline, Receptacle, 30 VDC, Vertical, Printed Circuit Board, Power & Signal





# Customers Also Bought



AV19 DPM 5A POWER LED WHITE 12V

RP 1E 0.1W 205K 0.1% 25PPM 5K RL

20 SYSTEM 50 HDR DRST SHRD



### Documents

Product Drawings REC ASSY,2.5 SLIM BATTERY CONN

English

**CAD** Files

3D PDF

3D

Customer View Model ENG\_CVM\_CVM\_1565986-1\_A2.2d\_dxf.zip

**C** For support call+1 800 522 6752

### 1565986-1

DC Jack Connectors, Board-to-Board, 5 Position, 2.5 mm [.098 in] Centerline, Receptacle, 30 VDC, Vertical, Printed Circuit Board, Power & Signal



English

Customer View Model ENG\_CVM\_CVM\_1565986-1\_A2.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1565986-1\_A2.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

### Datasheets & Catalog Pages 2\_PIECE\_POWER\_CONNECTORS\_qrg\_4-1773458-1

English

Product Specifications
2.5mm Pitch Battery Connector
Japanese
Product Specification
Japanese
2.5mm Pitch Battery Connector.
Japanese
Product Specification
Japanese

Product Environmental Compliance Product Compliance

English

Product Compliance

English