

1586518-2 ✓ ACTIVE




MATE-N-LOK | Commercial MATE-N-LOK

TE Internal #: 1586518-2

Rectangular Power Connectors, Header, Plug, Wire-to-Board, 8 Position, .195 in [4.95 mm] Centerline, Printed Circuit Board, Commercial MATE-N-LOK

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

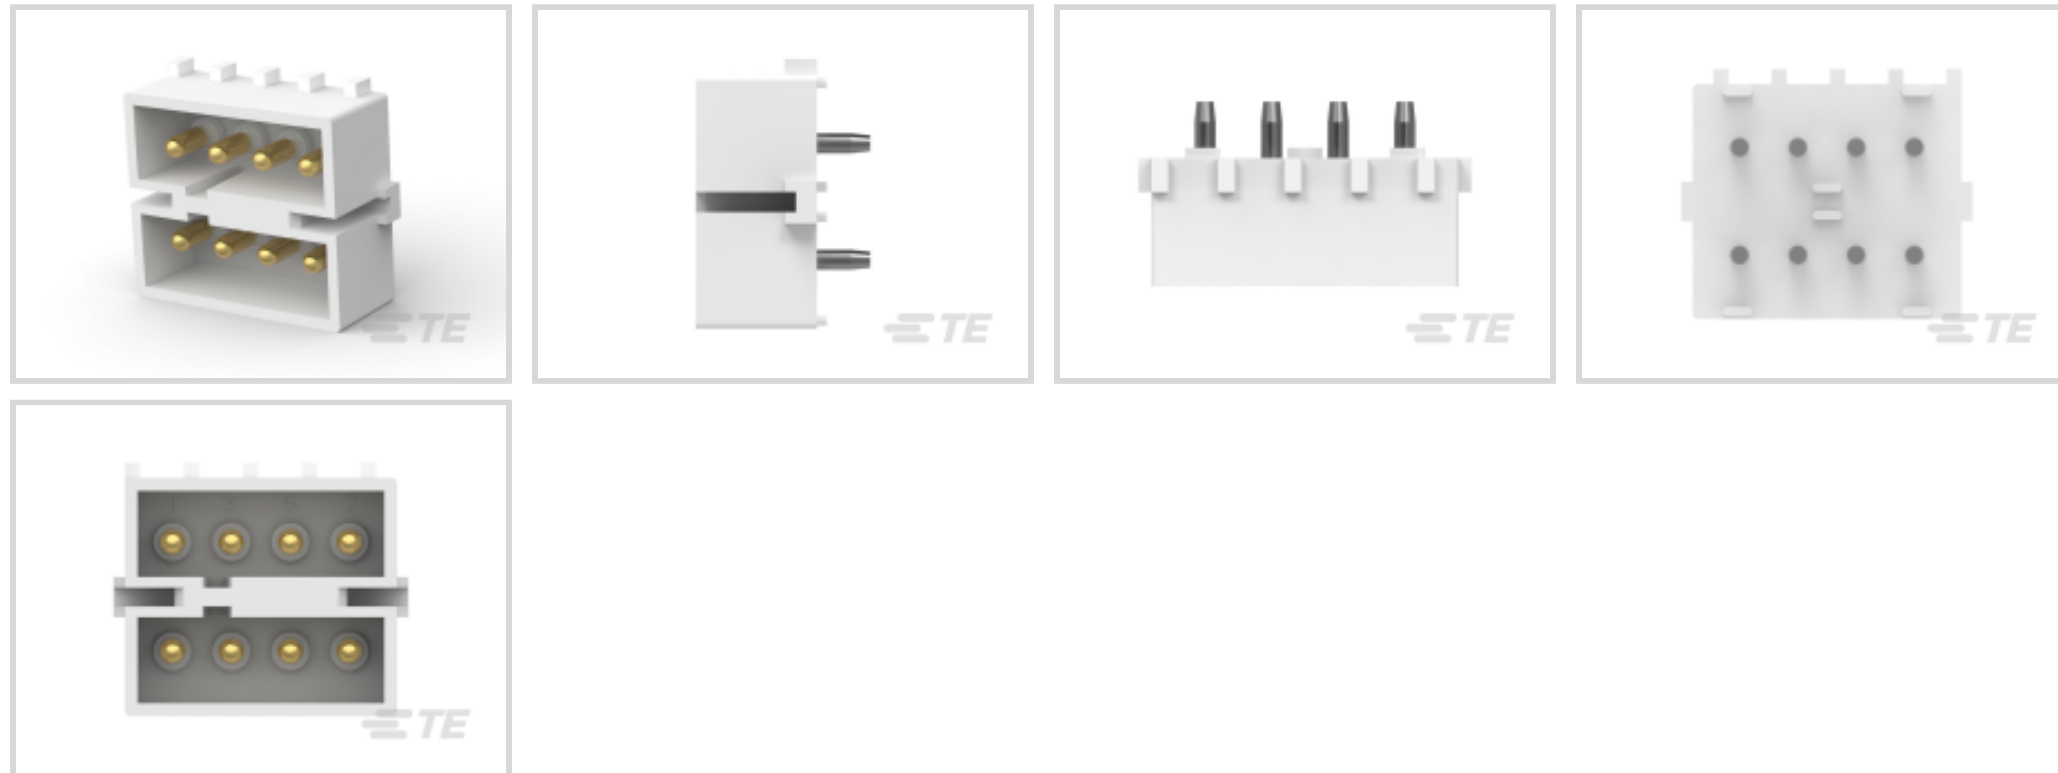

Rectangular Power Connector Type: **Header**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board**

Number of Positions: **8**

Centerline (Pitch): **4.95 mm [.195 in]**

Features

Product Type Features

Header Type	Fully Shrouded
Rectangular Power Connector Type	Header
Connector & Housing Type	Plug
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	8
PCB Mount Orientation	Vertical
Number of Power Positions	8
Number of Rows	2

Electrical Characteristics

Operating Voltage	250 VAC
-------------------	---------

Contact Features



Contact Current Rating (Max)	12 A
Contact Retention Within Housing	Without
Contact Type	Pin
PCB Contact Termination Area Plating Material	Tin
Contact Mating Area Plating Material	Gold
Contact Mating Area Plating Material Thickness	1.18 μm [.03 μin]

Termination Features

Termination Post & Tail Length	3.81 mm [.149 in]
Termination Method to Printed Circuit Board	Through Hole - Solder

Mechanical Attachment

Mating Alignment Type	Polarization
Mating Alignment	With
Connector Mounting Type	Board Mount
Mating Retention	With
Mating Retention Type	Positive Lock

Housing Features

Centerline (Pitch)	4.95 mm [.195 in]
Housing Color	Natural
Housing Material	Nylon

Dimensions

Row-to-Row Spacing	9.14 mm [.36 in]
PCB Thickness (Recommended)	.06 mm [1.57 in]
Width	9.52 mm [.37 in]
Height	19.93 mm [.78 in]
Length	22.8 mm [.9 in]

Usage Conditions

Operating Temperature Range	-55 – 105 $^{\circ}\text{C}$ [-67 – 221 $^{\circ}\text{F}$]
-----------------------------	--

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-2
Glow Wire Rating	Standard Part - Not Glow Wire



Agency/Standard Number	E28476
Agency/Standard	CSA, UL
UL Rating	Certified, Recognized
CSA File Number	LR16455
VDE Tested	No

Packaging Features

Packaging Method	Bag
Packaging Quantity	100

Other

For Use With	Socket (Plug) Housing
--------------	-----------------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



Also in the Series | Commercial MATE-N-LOK

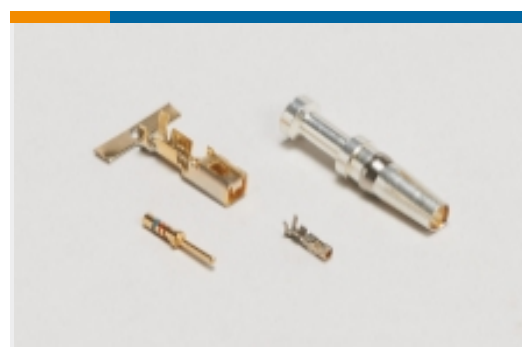


Connector Contacts(26)



Crimp Wire Pins, Tabs & Ferrules(3)



Insertion & Extraction Tools(5)

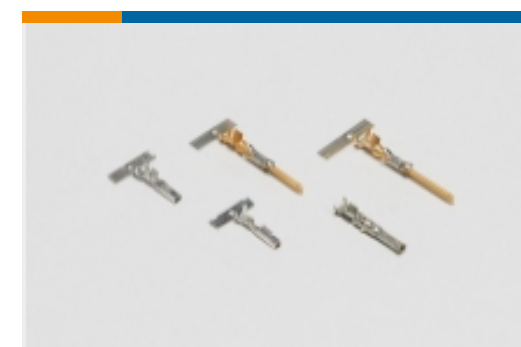


Power Contacts(129)



Rectangular Caps & Covers(2)



Rectangular Connector Housings(17)

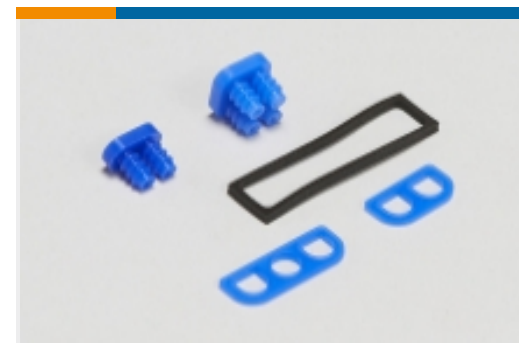

Rectangular Connector Seals(1)



Rectangular Power Connectors(170)



Standard Circular Connectors(4)



Standard Rectangular Connectors(10)




Wire-to-Board Connector Contacts(1)

Customers Also Bought




TE Part #1-917658-5
DYNAMIC D-3200M HDR ASSY 12P V

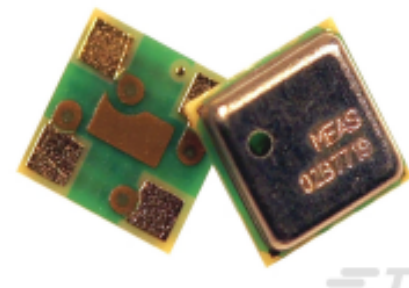


TE Part #MS563702BA03-50
2 BAR INDUSTRIAL ALTIMETER
SENSOR



TE Part #1-6609016-1
6ED1C=F7066 S0

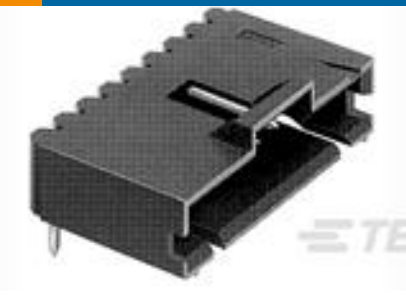


TE Part #6-103635-1
12 MTE HDR SRRA LTCH.100CL LF

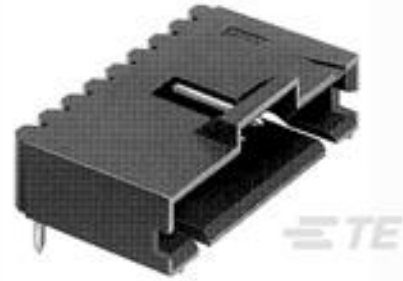

TE Part #5-103635-7
08 MTE HDR SRRA LTCH.100CL LF



TE Part #173081-6
6P EIS POST HDR ASSY

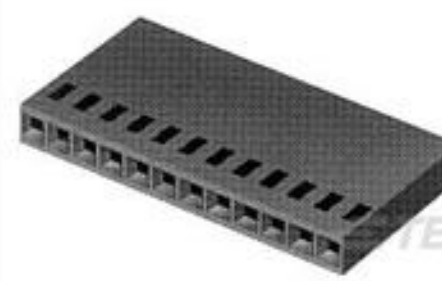

TE Part #2-87499-3
13 MODIV HSG SR MRKD .100CL



TE Part #747299-8
15 RCPT SP/FMS INSRT



TE Part #1747981-1
Std HDMI, RA, SMT

Documents

Product Drawings

[08P CMNL HDR ASSY PC NATL LF](#)

English

CAD Files

Customer View Model

[ENG_CVM_1586518-2_O.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_1586518-2_O.3d_stp.zip](#)

English

Customer View Model

[ENG_CVM_1586518-2_O.2d_dxf.zip](#)

English

[3D PDF](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages



[SOFT_SHELL_PIN_SOCKET_CONNECTORS_STANDARD_DENSITY](#)

English

[Product Specifications](#)

[Application Specification](#)

English

[Agency Approvals](#)

[CSA Certificate](#)

English