

AMP | AMPSEAL 16 TE Internal #: 1717674-1 Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16

View on TE.com >

Connectivity

Connectors > Automotive Connectors > Connector Housings > AMPSEAL 16 HOUSINGS



Connector & Housing Type: Housing for Male Terminals

Mating Pin Diameter: 1.5 mm [.059 in]

Connector System: Wire-to-Wire

Number of Positions: 4

Centerline (Pitch): 5.3 mm [.209 in]

All AMPSEAL 16 HOUSINGS (226)

Features

Product Type Features

Connector & Housing Shape	Rectangular			
Connector & Housing Type	Housing for Male Terminals			
Connector System	Wire-to-Wire			
Sealable	Yes			
Hybrid Connector	No			
Primary Locking Feature	Integrated in Housing			
Configuration Features				
Number of Positions	4			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	250 VDC			
Nominal Voltage Architecture	12 V, 24 V, 42 V, 48 V, 80 V, 90 V, 125 V, 240 V			

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16



Body Features

Cable Exit Angle	180°			
Body Material	PBT			
Primary Product Color	Red			
Connector Code	A			
Contact Features				
Contact Size	Size 16			
Contact Type	Pin			
Mating Pin Diameter	1.5 mm[.059 in]			
Contact Current Rating (Max)	13 A			
Mechanical Attachment				
Mounting Feature	Without			
Terminal Position Assurance	Yes			
Strain Relief	Without			
Mating Alignment Type	Keyed			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			

ousing Features		
Centerline (Pitch)	5.3 mm[.209 in]	
Dimensions		
Product Width	47.55 mm[1.872 in]	
Product Length	24.6 mm[.968 in]	
Product Height	22.45 mm[.883 in]	
Row-to-Row Spacing	4.5 mm[.177 in]	
Usage Conditions		
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C[158 °F][167 ° F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F]	
Operating Temperature Range	-40 – 125 °C[-40 – 257 °F]	
Industry Standards		
Degree of Protection	IP67	
UL Flammability Rating	UL 94HB	

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16



Packaging Features

Packaging Quantity	50			
Packaging Method	Bag			
Other				
Connector Position Assurance Capable	Yes			

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant	
EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed	
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free	


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16



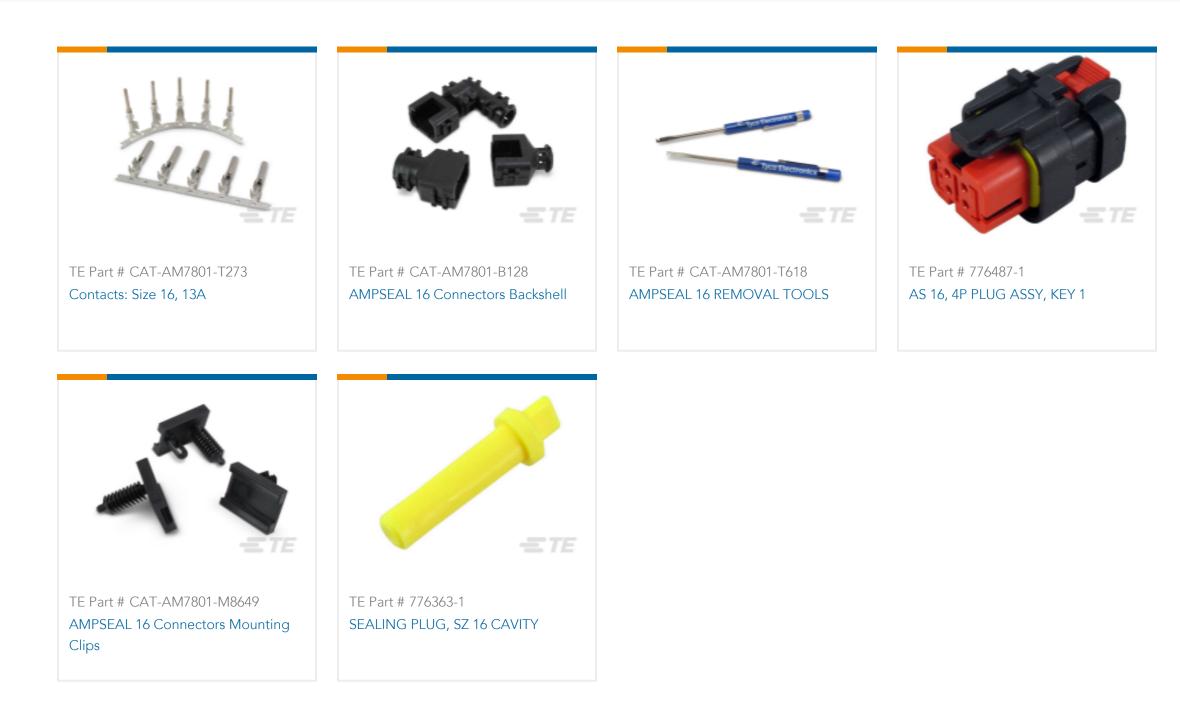

Also in the Series | AMPSEAL 16




Automotive Connector Caps & Covers (85)	Automotive Connector Locks & Position Assurance(2)	Automotive Housings(241)	Automotive Seals & Cavity Plugs(4)
AND			
Automotive Terminals(33)	Data Connectivity Housings(3)	Other Automotive Connector Accessories(11)	PCB Headers & Receptacles(3)

Customers Also Bought



Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16



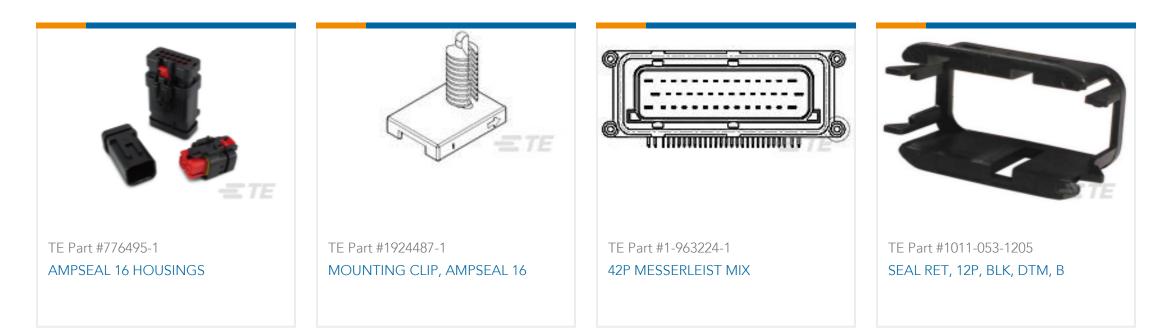



Documents

Product Drawings CAP ASSY,4P,BRACKET REVERSE TY

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1717674-1_E.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1717674-1_E.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1717674-1_E.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages ICT Terminals and Connectors Catalogue

English

CONNECTOR SELECTOR

English

Product Specifications

Application Specification

English

Housing for Male Terminals, Wire-to-Wire, 4 Position, .209 in [5.3 mm] Centerline, Sealable, Red, Cable Mount (Free-Hanging), AMPSEAL 16



Product Environmental Compliance Product Compliance

English

Product Compliance

English