

AMP | AMP Type III+

TE Internal #: 1-66105-9 Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type |||+

View on TE.com >

Connectors > Power Connectors > Power Contacts > TYPE III CONTACTS LP



Power Contact Type: Contact

Contact Mating Area Plating Material: Tin

Wire Size: .2 – .6 mm²

Connector & Contact Terminates To: Wire & Cable

All TYPE III CONTACTS LP (53)

Features



Product Type Features

Power Contact Type	Contact
Connector & Contact Terminates To	Wire & Cable
Electrical Characteristics	
Test Current	13 A
Contact Features	
Contact Mating Area Plating Material	Tin
Contact Current Rating (Max)	13 A
Contact Type	Socket
Contact Retention Within Housing	With
Mating Pin Diameter	1.57 mm[.062 in]
Contact Base Material	Brass
Contact Mating Area Plating Material Thickness	2.54 μm[100 μin]
Contact Mating Area Plating Material Finish	Bright

1-66105-9

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type III+



Wire Contact Termination Area Plating Thickness	2.54 μm[100 μin]
Wire Contact Termination Area Plating Material	Tin
Wire Contact Termination Area Plating Material Finish	Bright
Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	.76 μm[30 μin]
Contact Size	16
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Wire Size	.2 – .6 mm²
Accepts Wire Insulation Diameter Range	1.02 – 2.03 mm[.04 – .08 in]
Usage Conditions	
Operating Temperature Range	-55 – 90 °C[-67 – 194 °F]
Operation/Application	
Circuit Application	Power & Signal
Packaging Features	
Packaging Method	Carton, Loose Piece
Packaging Quantity	1000
Other	
Wire/Cable Type	Discrete Wire
For Use With	CPC Connectors, G Series Connectors, M Series Connectors
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022

C For support call+1 800 522 6752

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type III+



Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Halogen Content


Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

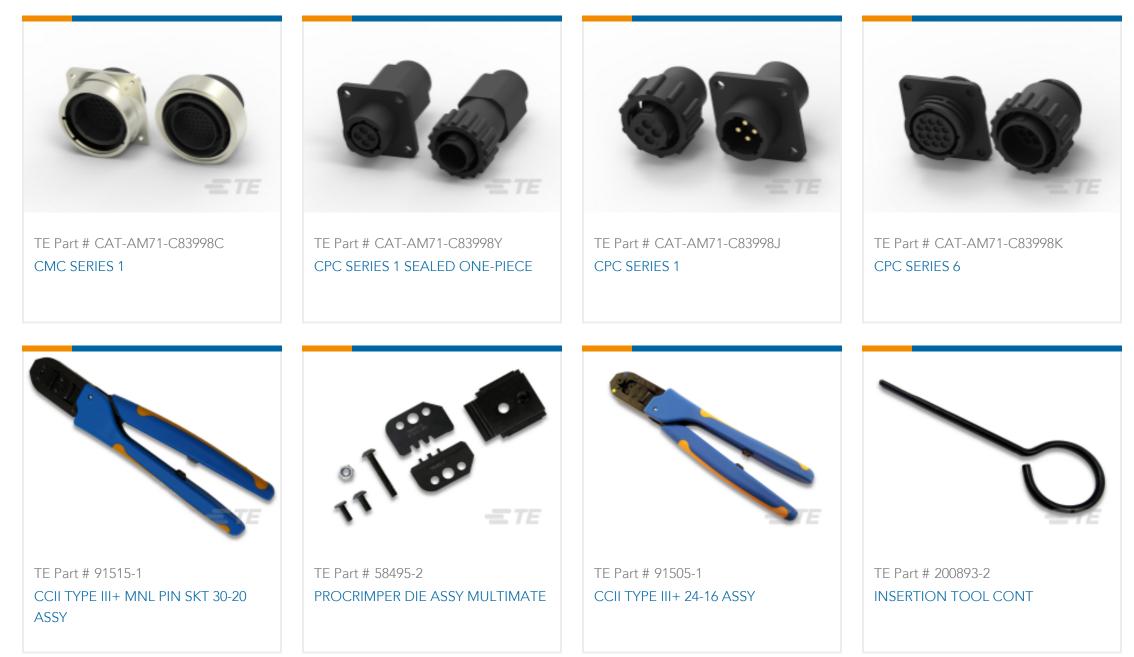

1-66105-9


Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type III+







Also in the Series | AMP Type III+

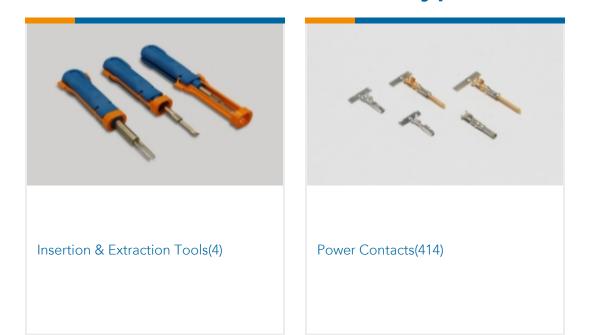

Customers Also Bought



Documents

Product Drawings

III+ SKT,24-20,TIN,LP

English

CAD Files

Customer View Model

ENG_CVM_CVM_1-66105-9_AE.2d_dxf.zip

1-66105-9

Power Contacts, Contact, Tin, 24 – 20 AWG Wire Size, .2 – .6 mm² Wire Size, Wire & Cable, Crimp, Power & Signal, Socket, AMP Type III+



English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1-66105-9_AE.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-66105-9_AE.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

AMP Circular Connectors for Commercial Signal & Power Applications

English

Signal Contacts

English

M_SERIES_PIN_AND_SOCKET_CONNECTORS

English

Product Specifications

Application Specification

English

Product Environmental Compliance MD_1-66105-9_103120171031_dmtec

English

MD_1-66105-9_103120171031_dmtec

English