
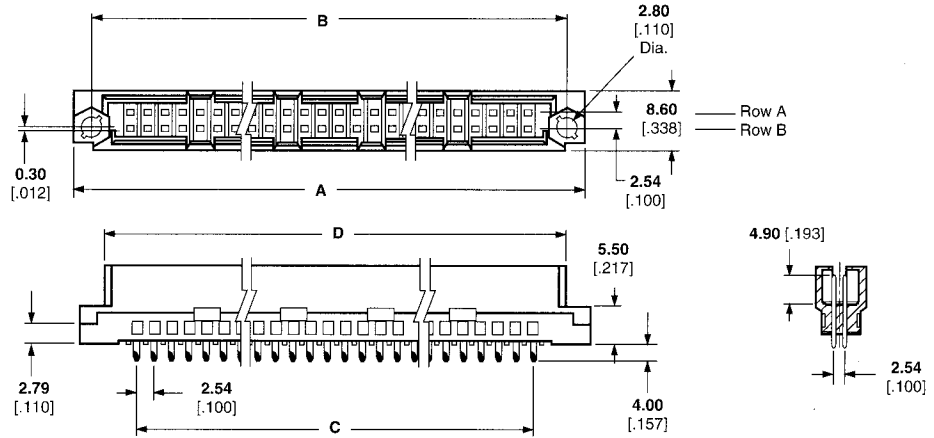


Type Q Vertical Pin Assemblies with Solder Posts

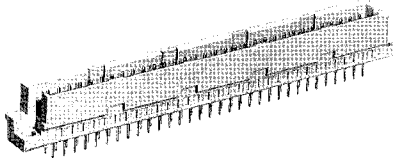

Material

Housing — Glass filled polymer
Contacts — Copper alloy

Related Product Data

DIN Performance Levels — Page 6
Performance Specifications — Page 8

Mateable Connectors — Pages 15, 16, 51

PC Board Hole Layout — Page 58

Accessories — Pages 68, 69

Technical Documents — Page 74:

DIN Specification 41612
IEC Specification 60603-2
Application Specification 114-9014
Instruction Sheet 408-6784

Standard Size

Number of Positions	Rows Loaded	Dimensions				DIN Level	Part Number
		A	B	C	D		
64	A,B	94.80 3.732	90.00 3.543	78.74 3.100	88.01 3.465	III	174254-2

Half Size

Number of Positions	Rows Loaded	Dimensions				DIN Level	Part Number
		A	B	C	D		
32	A,B	54.10 2.130	49.30 1.941	38.10 1.500	47.37 1.865	III	174254-1

Expanded Size

Number of Positions	Rows Loaded	Dimensions				DIN Level	Part Number
		A	B	C	D		
80	A,B	115.10 4.531	110.30 4.343	99.06 3.900	108.33 4.265	III	174254-3