
1747066-4 - ACTIVE

GRACE INERTIA 2.5 TE Internal #: 1747066-4 Housing, Plug, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, GRACE INERTIA 2.5

### View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

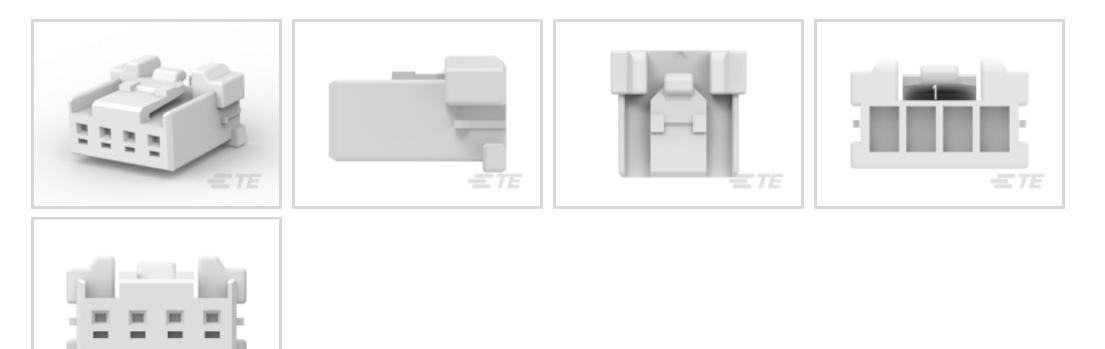

Connector Product Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Board Number of Positions: 4 Centerline (Pitch): 2.5 mm [.098 in]

## Features



## Product Type Features

Connector Product Type	Housing				
Connector & Housing Type	Plug				
Connector System	Wire-to-Board				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	4				
Number of Rows	1				
Electrical Characteristics					
Operating Voltage	50 VAC				
Contact Features					
Contact Layout	Inline				
Contact Type	Pin				
Contact Base Material	Copper Alloy				

**C** For support call+1 800 522 6752

Housing, Plug, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



## **Termination Features**

Termination Method to Wire & Cable	Crimp					
Mechanical Attachment						
Strain Relief	Without					
Panel Mount Feature	Without					
PCB Mount Retention	Without					
Mating Retention Type	Latch					
Mating Retention	With					
Connector Mounting Type	Cable Mount (Free-Hanging)					
Housing Features						
Housing Features						
Housing Features Housing Entry Configuration	Both Ends Open					
	Both Ends Open Nylon 6/6 GF					
Housing Entry Configuration						
Housing Entry Configuration Housing Material	Nylon 6/6 GF					
Housing Entry Configuration Housing Material Centerline (Pitch)	Nylon 6/6 GF 2.5 mm[.098 in]					
Housing Entry Configuration Housing Material Centerline (Pitch) Housing Color	Nylon 6/6 GF 2.5 mm[.098 in]					

## Usage Conditions

Ora exetine er Terrere ereture Dere ere							
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]						
Operation/Application							
Circuit Application	Power & Signal						
Industry Standards							
Glow Wire Rating	Standard Part - Not Glow Wire						
UL Flammability Rating	UL 94V-0						
Packaging Features							
Packaging Quantity	600						
Packaging Method	Bag						
Product Compliance							
For compliance documentation, visit the product page on TE.com>							
EU RoHS Directive 2011/65/EU	Compliant						

Housing, Plug, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



EU ELV Directive 2000/53/EC	Compliant	
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold	
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed	
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.	


#### Solder Process Capability

Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

# **Compatible Parts**

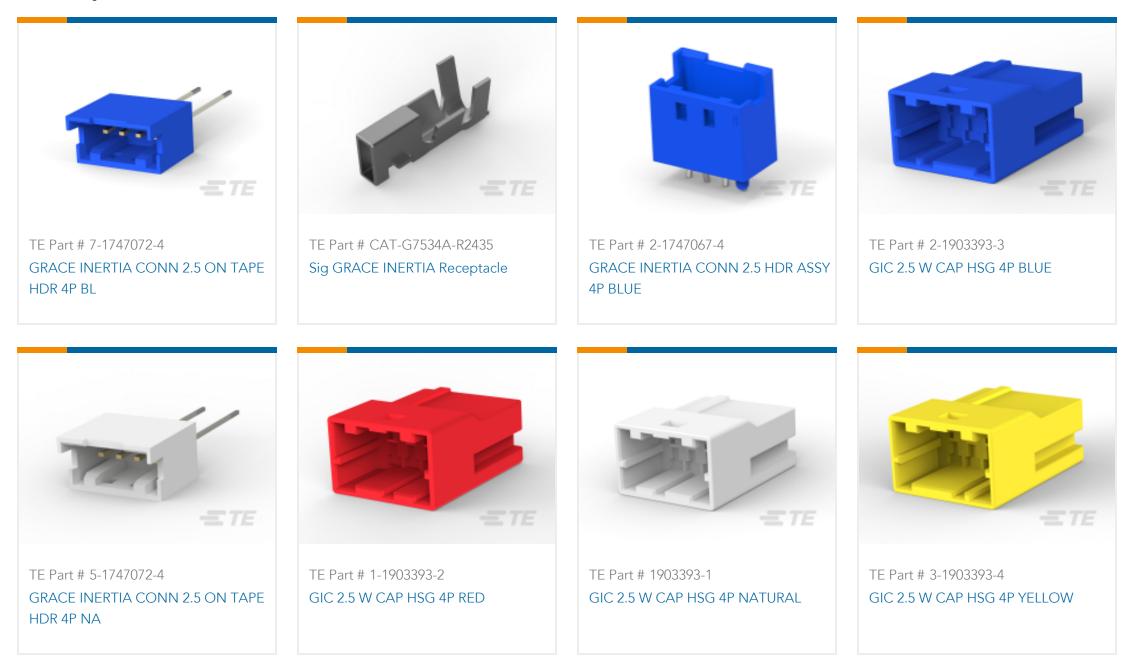

Housing, Plug, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, GRACE INERTIA 2.5





# Also in the Series | GRACE INERTIA 2.5



Rectangular Connector Locking(2)	Rectangular Power Connectors(35)	W	/ire-to-Board Connector Assemblies	Wire-to-Board Connector Contacts(5)
		&	Housings(71)	

# Customers Also Bought





Housing, Plug, Wire-to-Board, 4 Position, 2.5 mm [.098 in] Centerline, Crimp, 1 Row, Natural, Mating Retention, Wire & Cable, GRACE INERTIA 2.5



## Documents

**Product Drawings GRACE INERTIA CONN 2.5 PLUG HSG 4P NATUR** 

English

## **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_1747066-4\_E1.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1747066-4\_E1.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1747066-4\_E1.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications Application Specification** 

English

**Product Environmental Compliance** MD\_1747066-4\_12082017853\_dmtec

English

MD\_1747066-4\_12082017853\_dmtec

English