






NUMBER
C-1734506

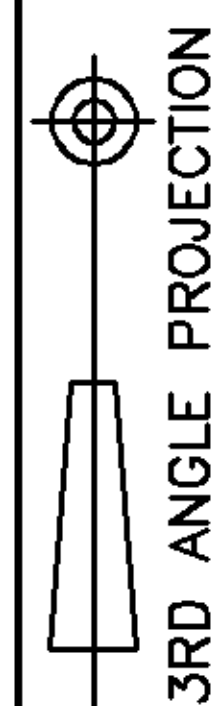

METRIC


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD. DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

PRINT
DIST
DW

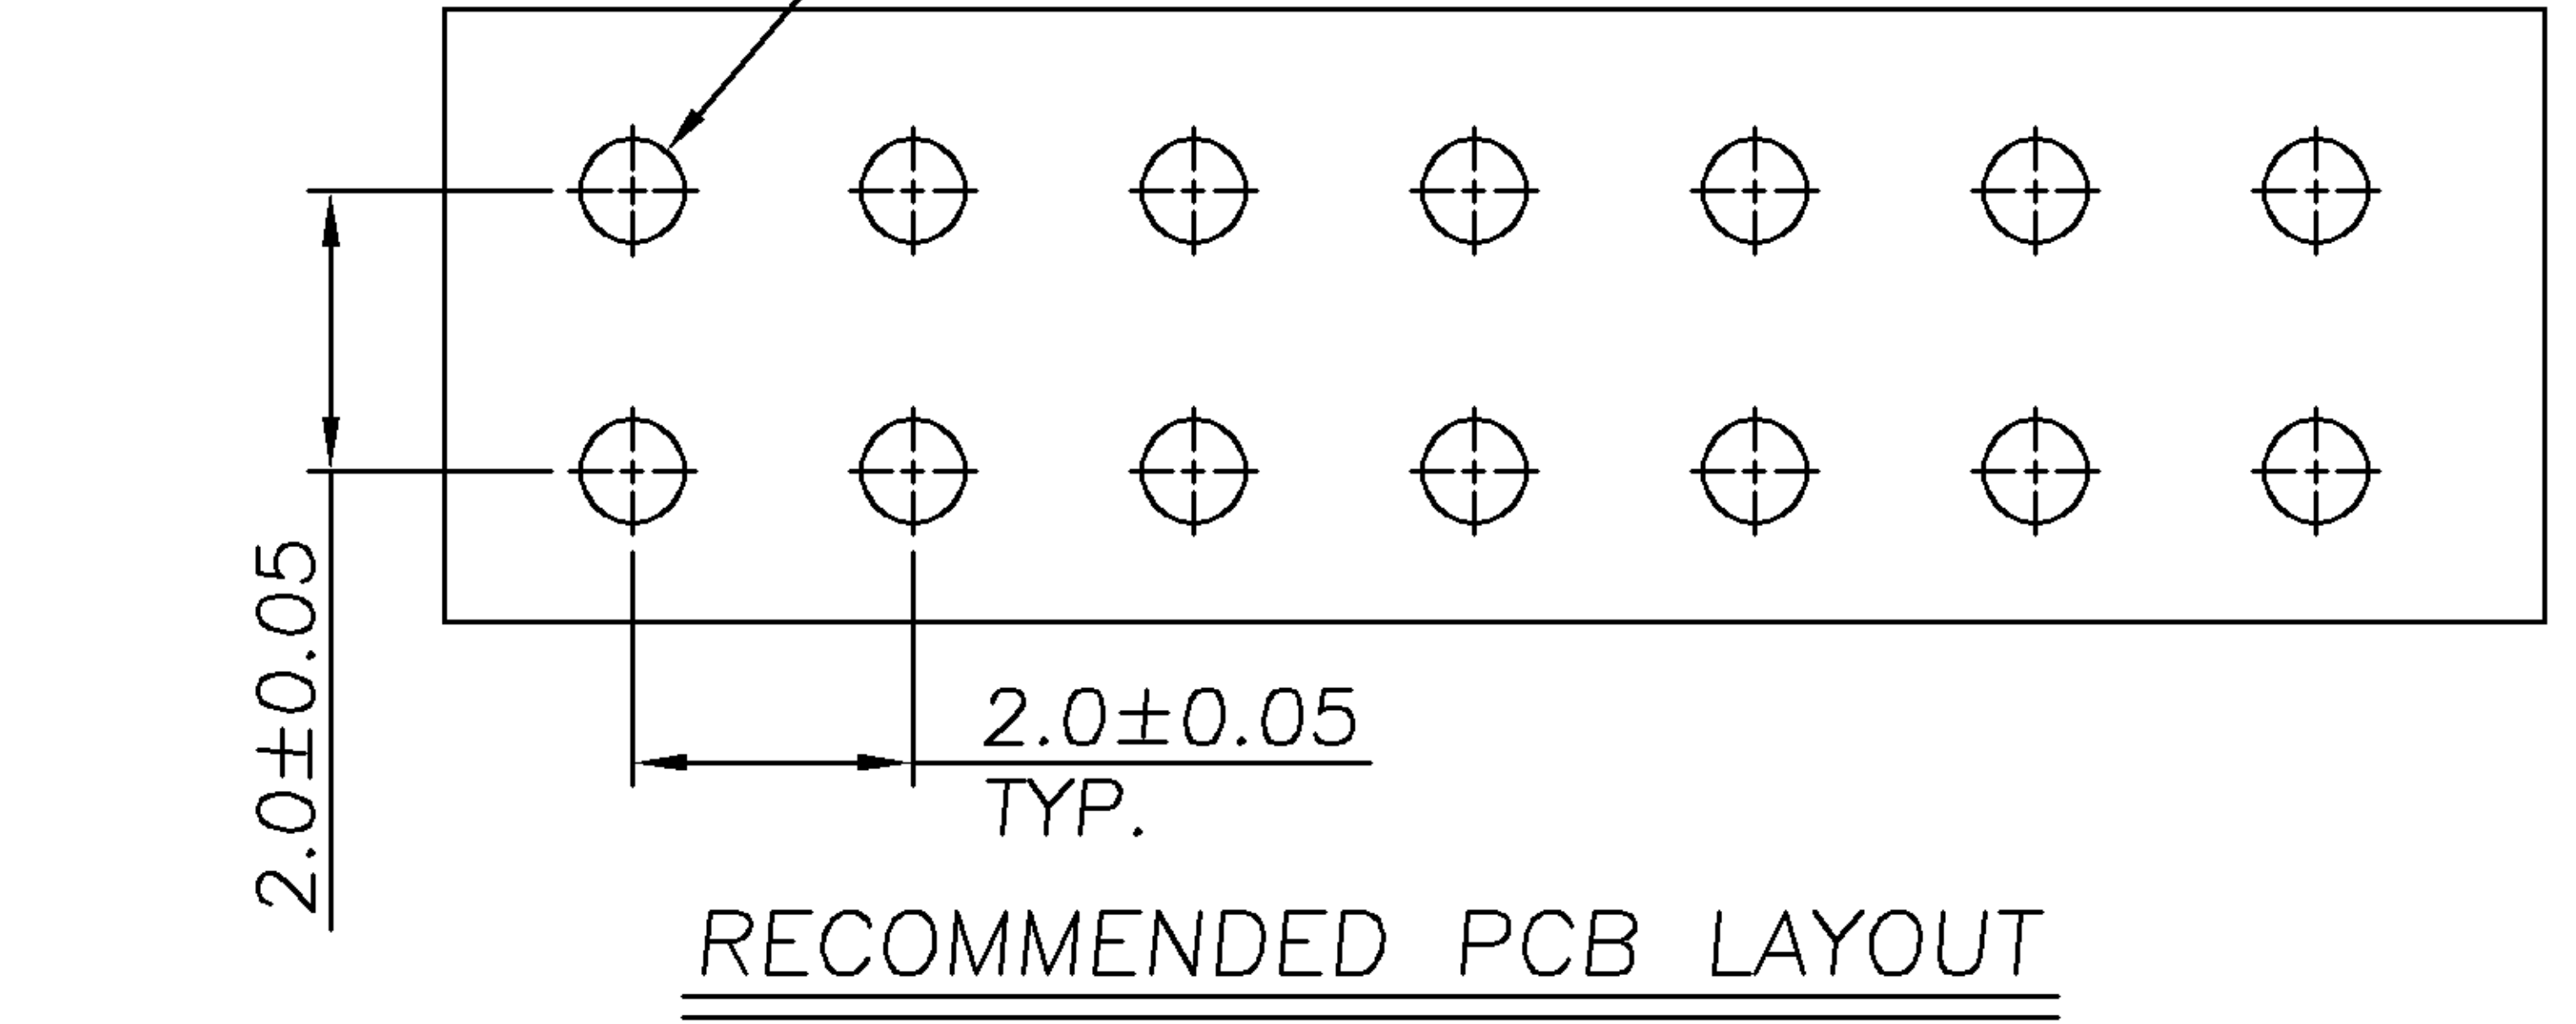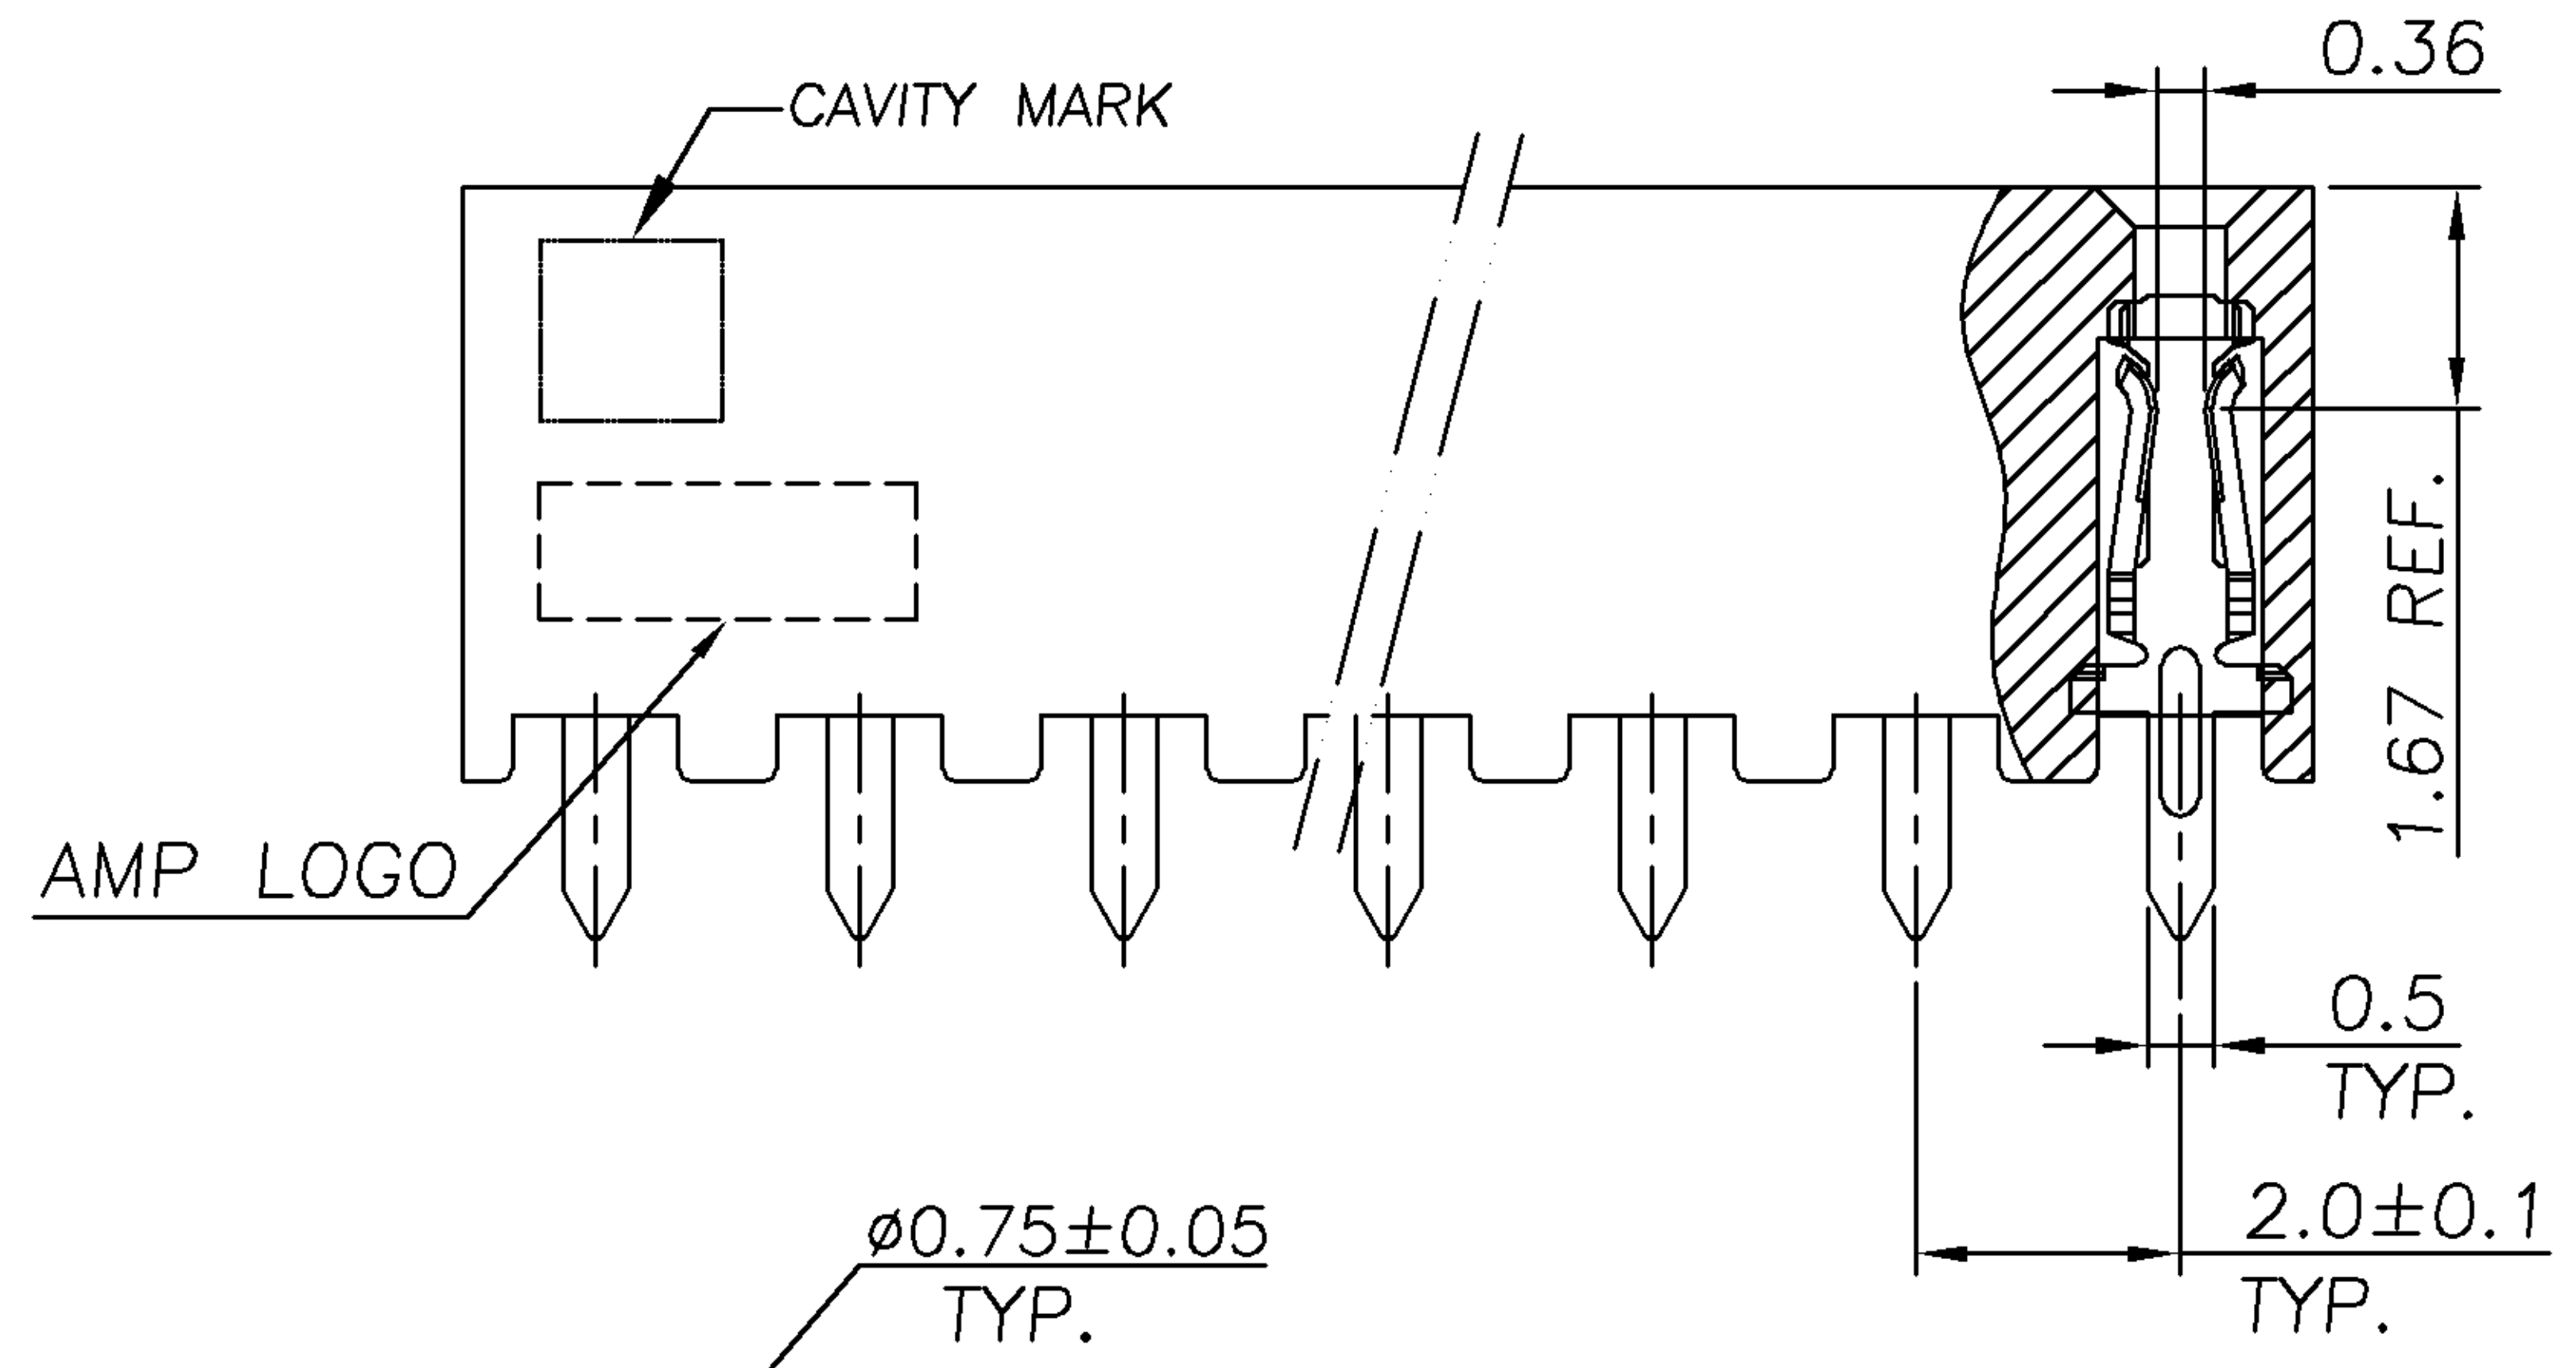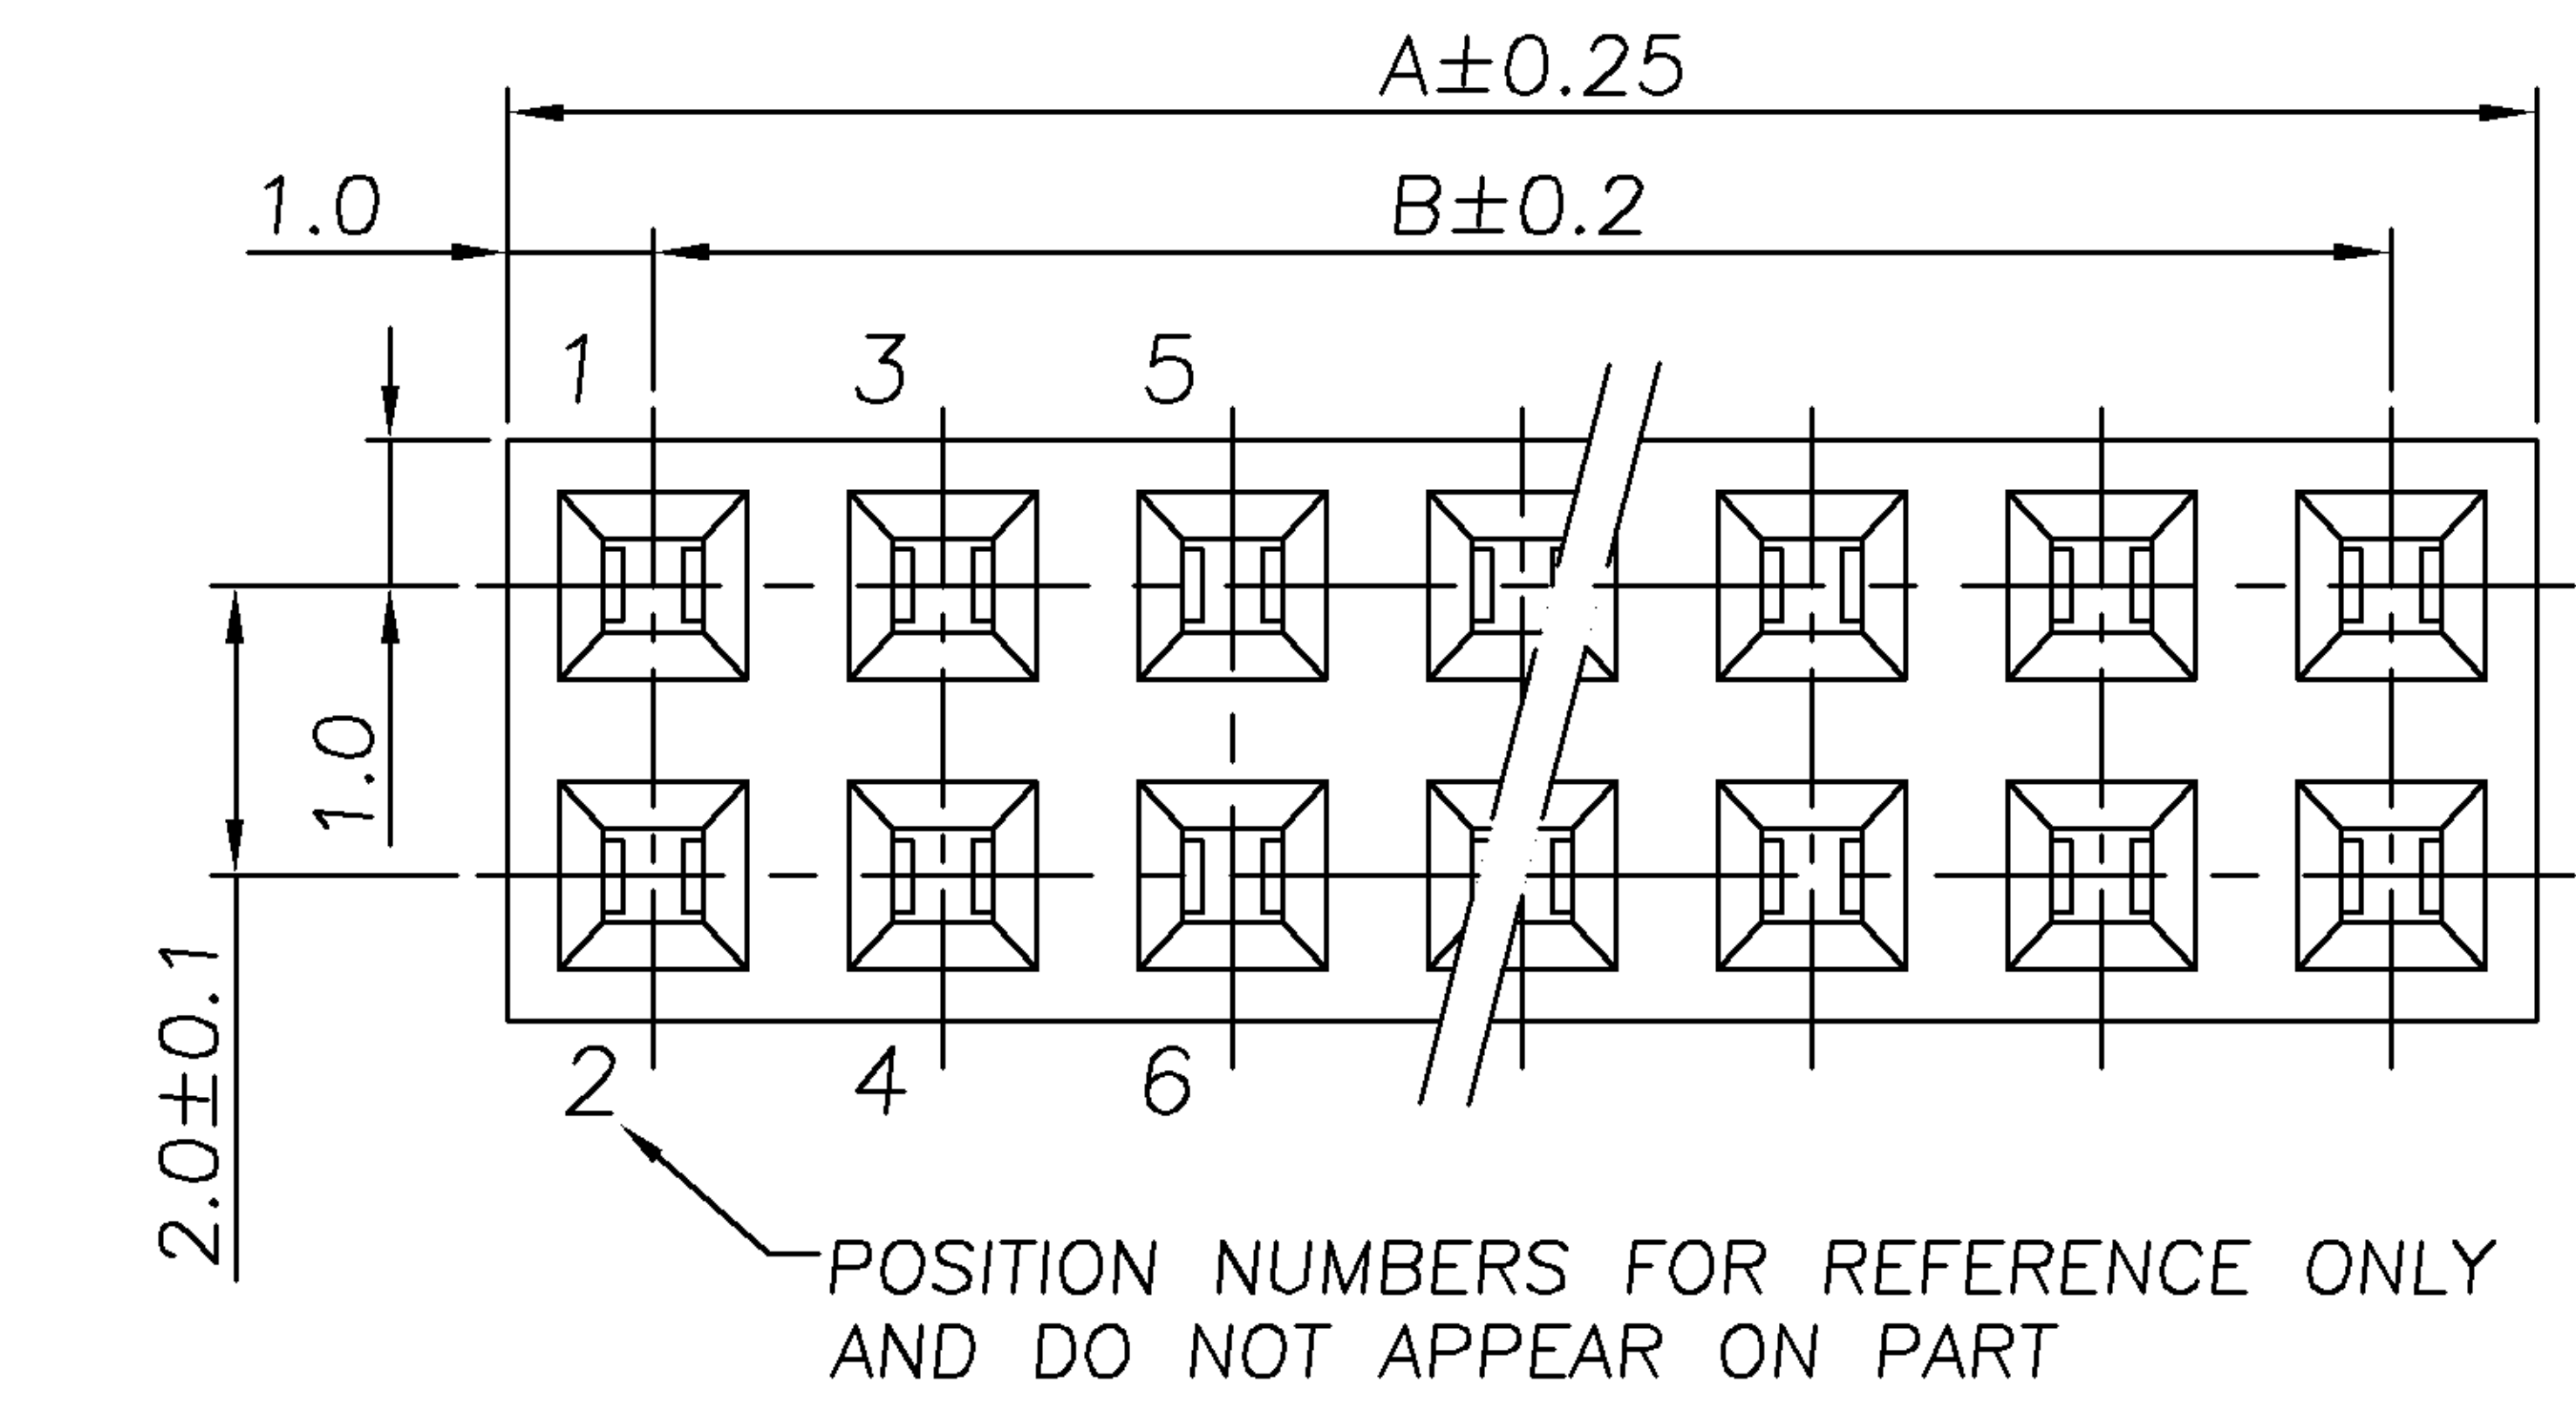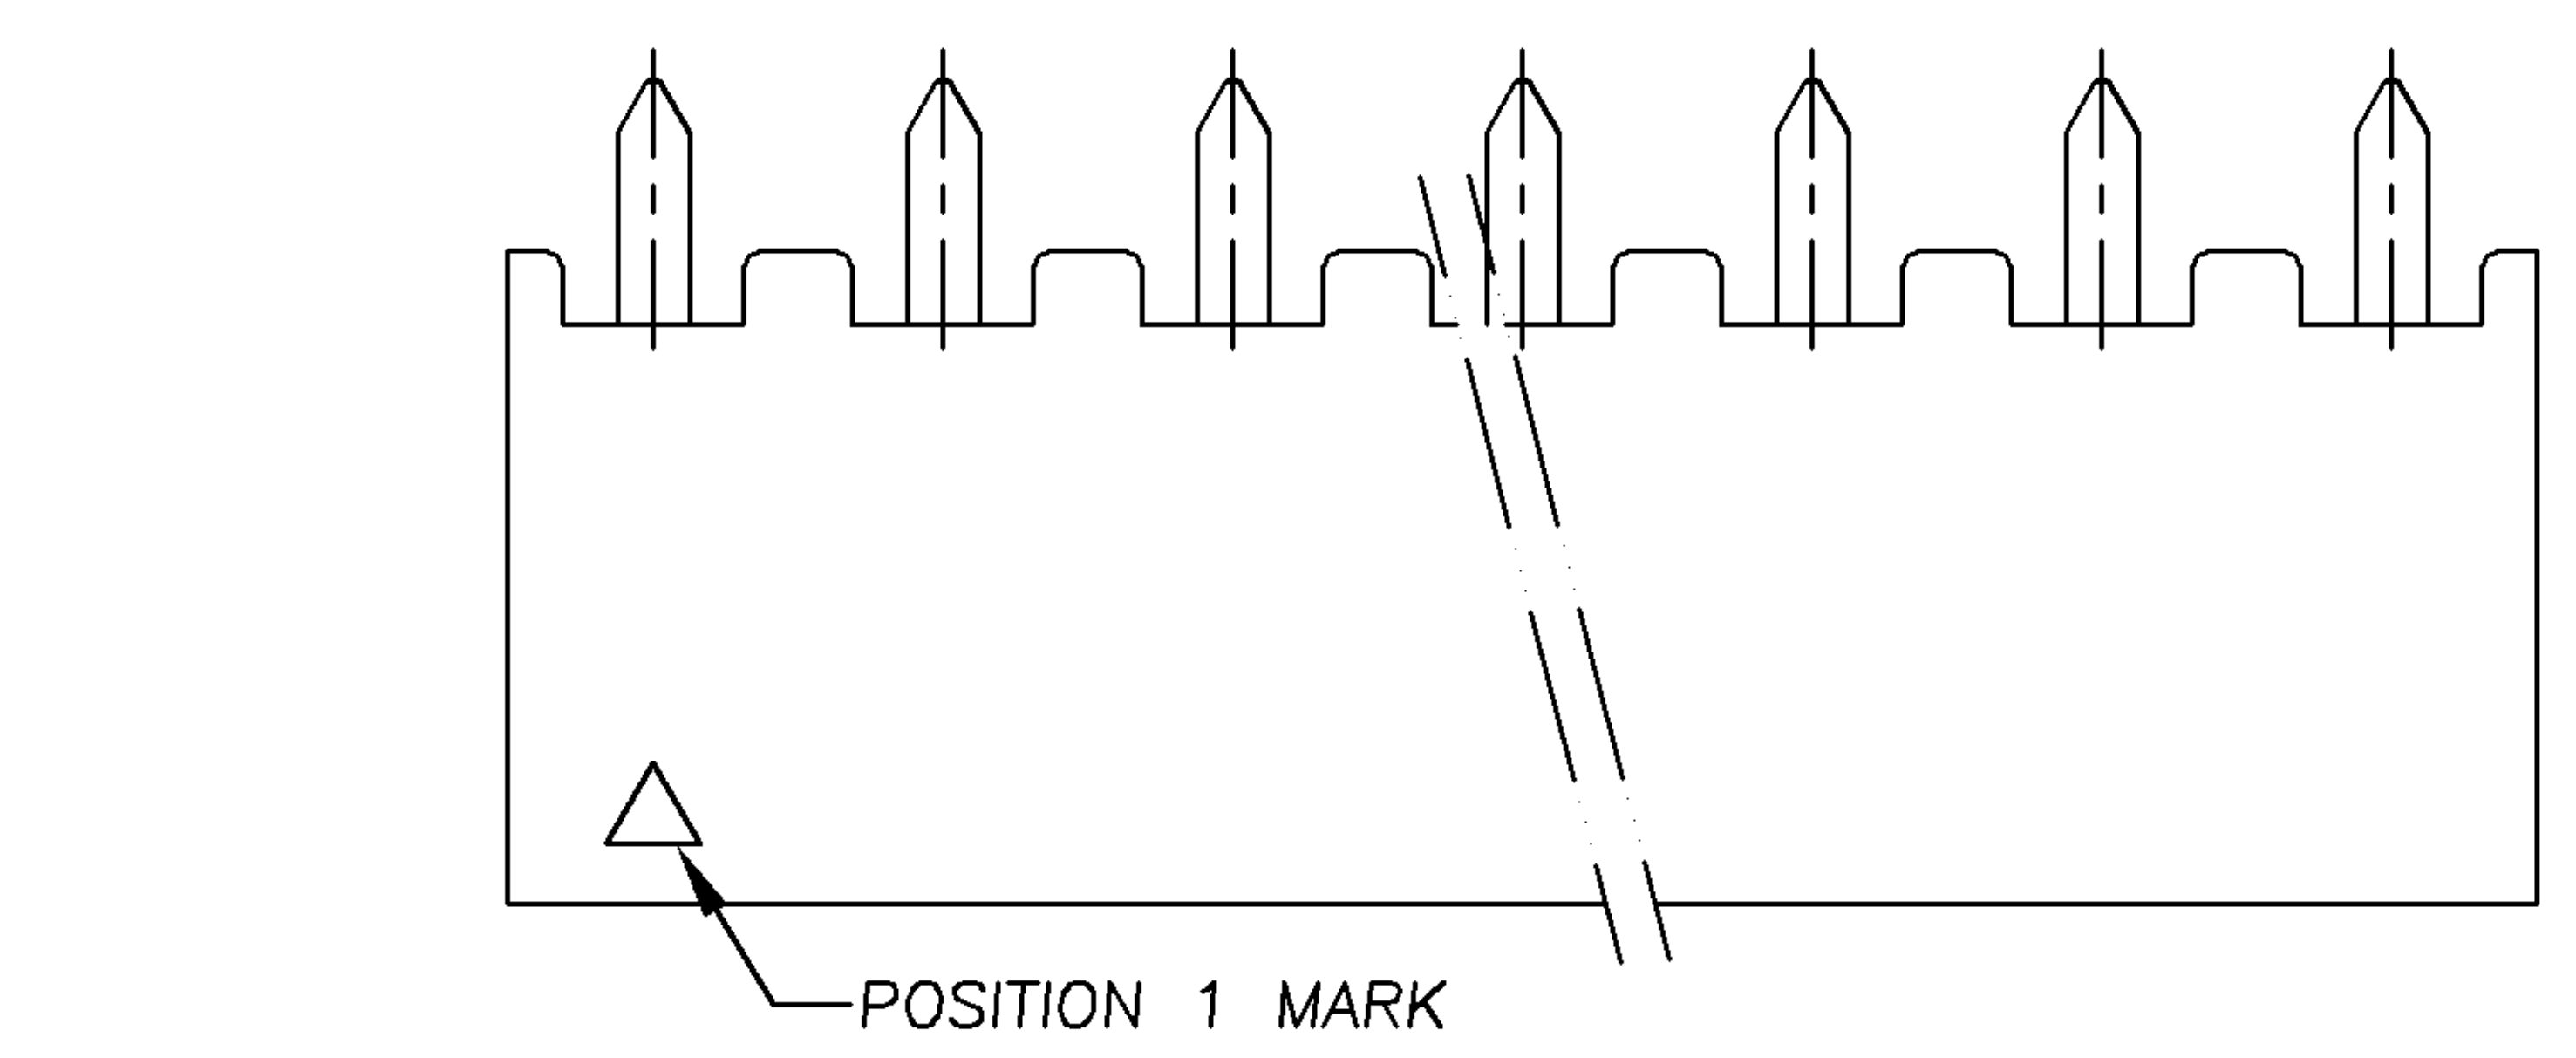

NOTE:

- MATERIAL :
HOUSING : THERMOPLASTIC, UL94V-0, BLACK COLOR.
CONTACT : PHOSPHOR BRASS, THICKNESS=0.20mm.
- FINISH:
CONTACT : GOLD PLATED (SEE TABLE) ON CONTACT AREA
80u" MIN. MATTE TIN PLATED ON SOLDER TAIL,
50u" MIN. NICKEL UNDERPLATED ALL OVER.
- APPLICATION :
SOLDERTAIL LENGTH 2.6 FOR PCB THICKNESS 1.0 MAX.
1.2 FOR PCB THICKNESS 0.3 MAX.
- WAVE SOLDER CAPABLE TO 265°C PER TYCO SPEC 109-202,
CONDITION B.

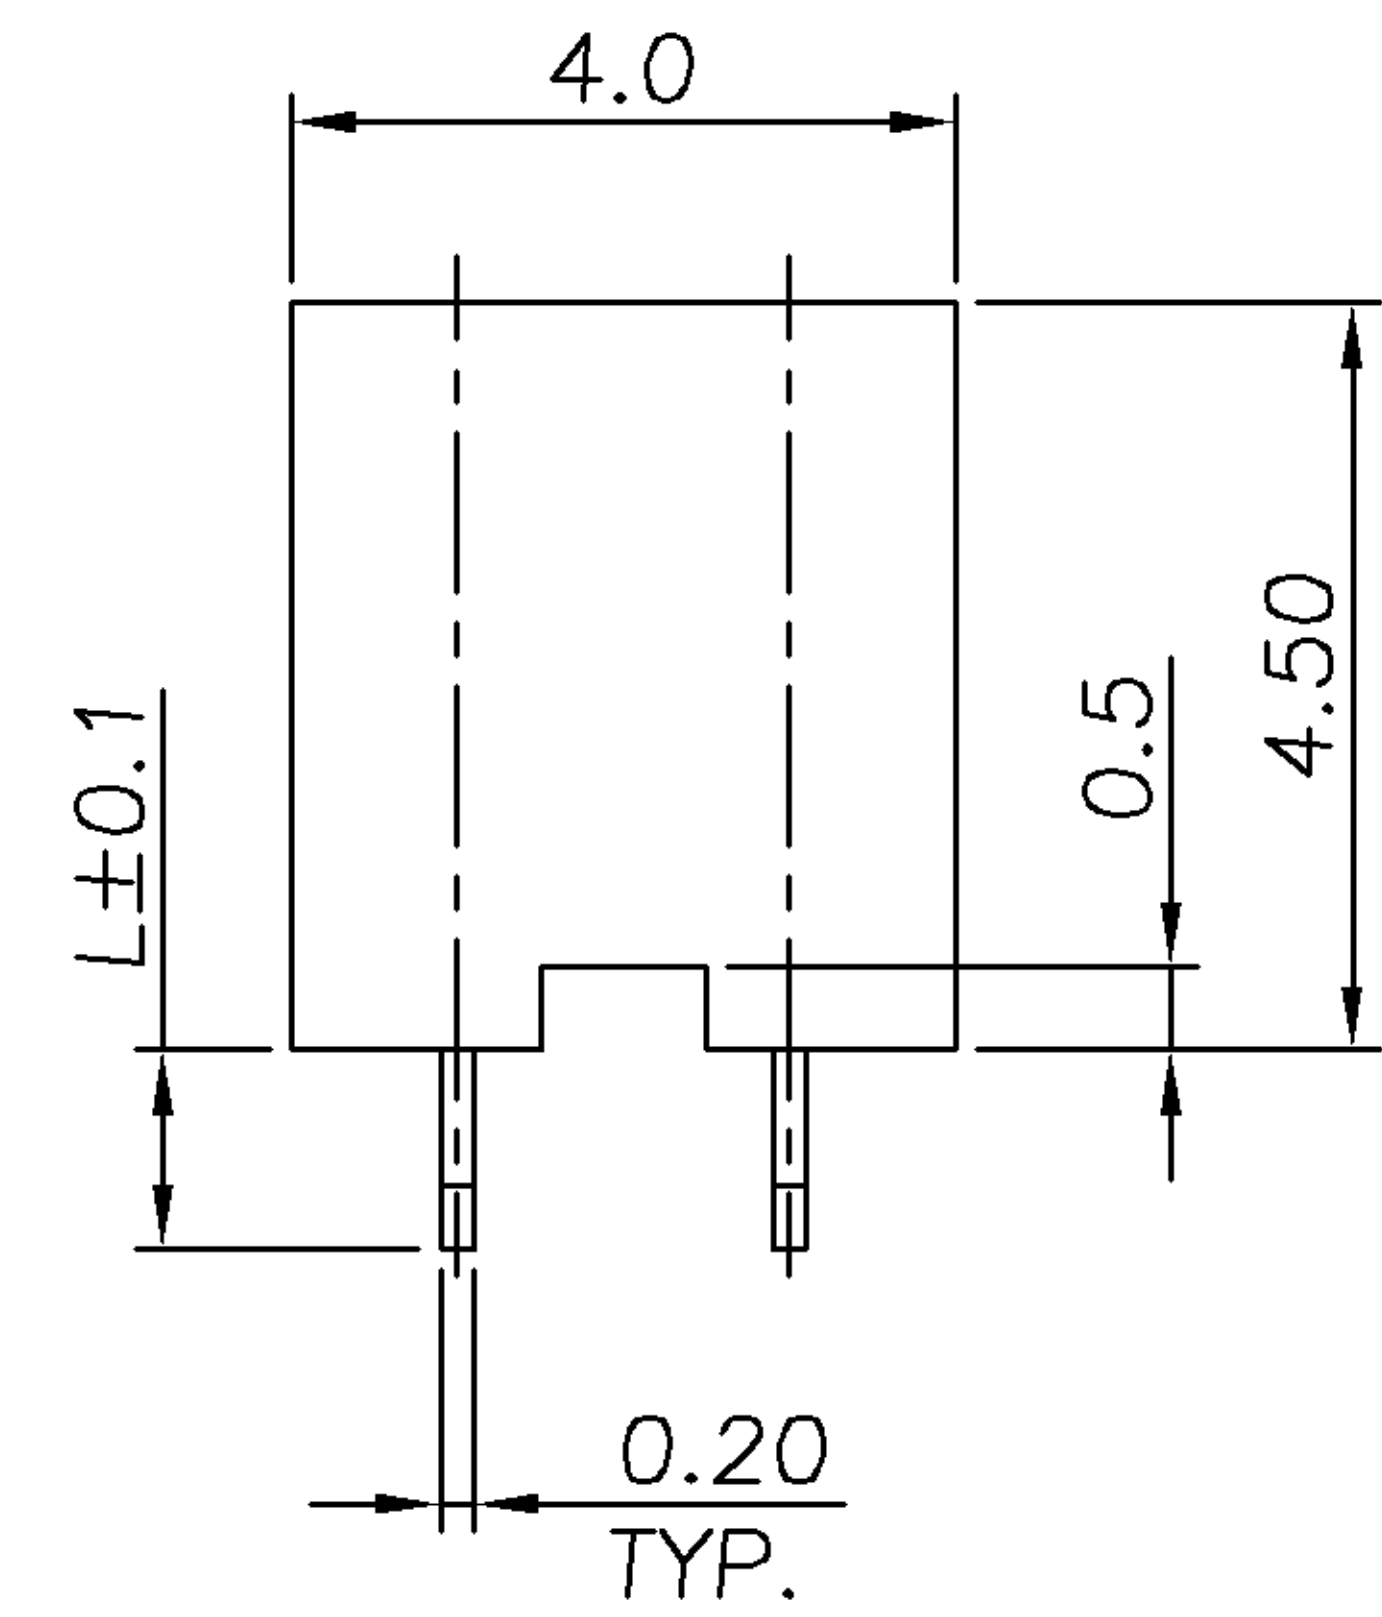


GOLD PLATE THICKNESS	"L"	KEYING POS.	30u"			8u"						
			A	B	POS	A	B	POS				
30u"	2.6±0.1	6	40	38	40	9-	-9	40	38	40	4-	-9
			50	48	50	9-	-8	50	48	50	4-	-8
			48	46	48	9-	-7	48	46	48	4-	-7
			46	44	46	9-	-6	46	44	46	4-	-6
			44	42	44	9-	-5	44	42	44	4-	-5
			42	40	42	9-	-4	42	40	42	4-	-4
			40	38	40	9-	-3	40	38	40	4-	-3
			38	36	38	9-	-2	38	36	38	4-	-2
			36	34	36	9-	-1	36	34	36	4-	-1
			34	32	34	9-	-0	34	32	34	4-	-0
			32	30	32	8-	-9	32	30	32	3-	-9
			30	28	30	8-	-8	30	28	30	3-	-8
			28	26	28	8-	-7	28	26	28	3-	-7
			26	24	26	8-	-6	26	24	26	3-	-6
			24	22	24	8-	-5	24	22	24	3-	-5
			22	20	22	8-	-4	22	20	22	3-	-4
			20	18	20	8-	-3	20	18	20	3-	-3
			18	16	18	8-	-2	18	16	18	3-	-2
			16	14	16	8-	-1	16	14	16	3-	-1
			14	12	14	8-	-0	14	12	14	3-	-0
12	10	12	7-	-9	12	10	12	2-	-9			
10	8	10	7-	-8	10	8	10	2-	-8			
8	6	8	7-	-7	8	6	8	2-	-7			
6	4	6	7-	-6	6	4	6	2-	-6			
4	2	4	7-	-5	4	2	4	2-	-5			
50	48	50	7-	-4	50	48	50	2-	-4			
48	46	48	7-	-3	48	46	48	2-	-3			
46	44	46	7-	-2	46	44	46	2-	-2			
44	42	44	7-	-1	44	42	44	2-	-1			
42	40	42	7-	-0	42	40	42	2-	-0			
40	38	40	6-	-9	40	38	40	1-	-9			
38	36	38	6-	-8	38	36	38	1-	-8			
36	34	36	6-	-7	36	34	36	1-	-7			
34	32	34	6-	-6	34	32	34	1-	-6			
32	30	32	6-	-5	32	30	32	1-	-5			
30	28	30	6-	-4	30	28	30	1-	-4			
28	26	28	6-	-3	28	26	28	1-	-3			
26	24	26	6-	-2	26	24	26	1-	-2			
24	22	24	6-	-1	24	22	24	1-	-1			
22	20	22	6-	-0	22	20	22	1-	-0			
20	18	20	5-	-9	20	18	20		-9			
18	16	18	5-	-8	18	16	18		-8			
16	14	16	5-	-7	16	14	16		-7			
14	12	14	5-	-6	14	12	14		-6			
12	10	12	5-	-5	12	10	12		-5			
10	8	10	5-	-4	10	8	10		-4			
8	6	8	5-	-3	8	6	8		-3			
6	4	6	5-	-2	6	4	6		-2			
4	2	4	5-	-1	4	2	4		-1			

TOLERANCES UNLESS OTHERWISE SPECIFIED:		DWN	O. HU	23-MAR-2006	
0 PLC	±	CHK	S. HOU	23-MAR-2006	
1 PLC	±0.15	NAME			
2 PLC	±0.10	AMPMODU 2.0MM PITCH, REC CONN, VERTICAL, MOUNT TYPE			
3 PLC	±0.05	LOC			
ANGLES	±3'	SIZE			
MATERIAL		APVD	W.J. KE	DRAWING NO	
SEE NOTE		23-MAR-2006		C-1734506	
FINISH		PRODUCT SPEC		REV	
SEE NOTE		108-57197		A	
QUALIFICATION TEST REPORT		WEIGHT		SCALE	
501-57197		---		SHEET	
DATE		1 OF 2		CUSTOMER DRAWING	

A	FIRST RELEASED	OH	SH	25MAR	2006
LTR	REVISION RECORD	ECN	DWN	CHK	DATE


THIS INFORMATION IS CONFIDENTIAL AND IS DISCLOSED TO YOU ON CONDITION THAT NO FURTHER DISCLOSURE IS MADE BY YOU TO OTHER THAN AMP PERSONNEL WITHOUT WRITTEN AUTHORIZATION FROM AMP (TAIWAN) LTD. DIMENSIONS IN MILLIMETERS. DO NOT SCALE PRINT.

METRIC

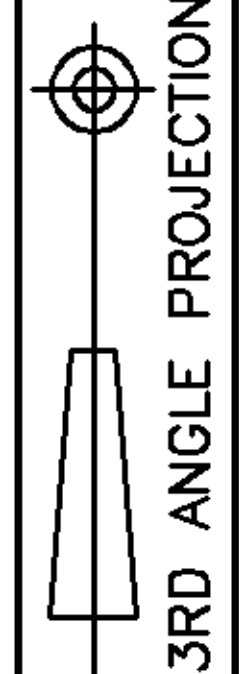

NUMBER
C-1734506

PRINT
DW

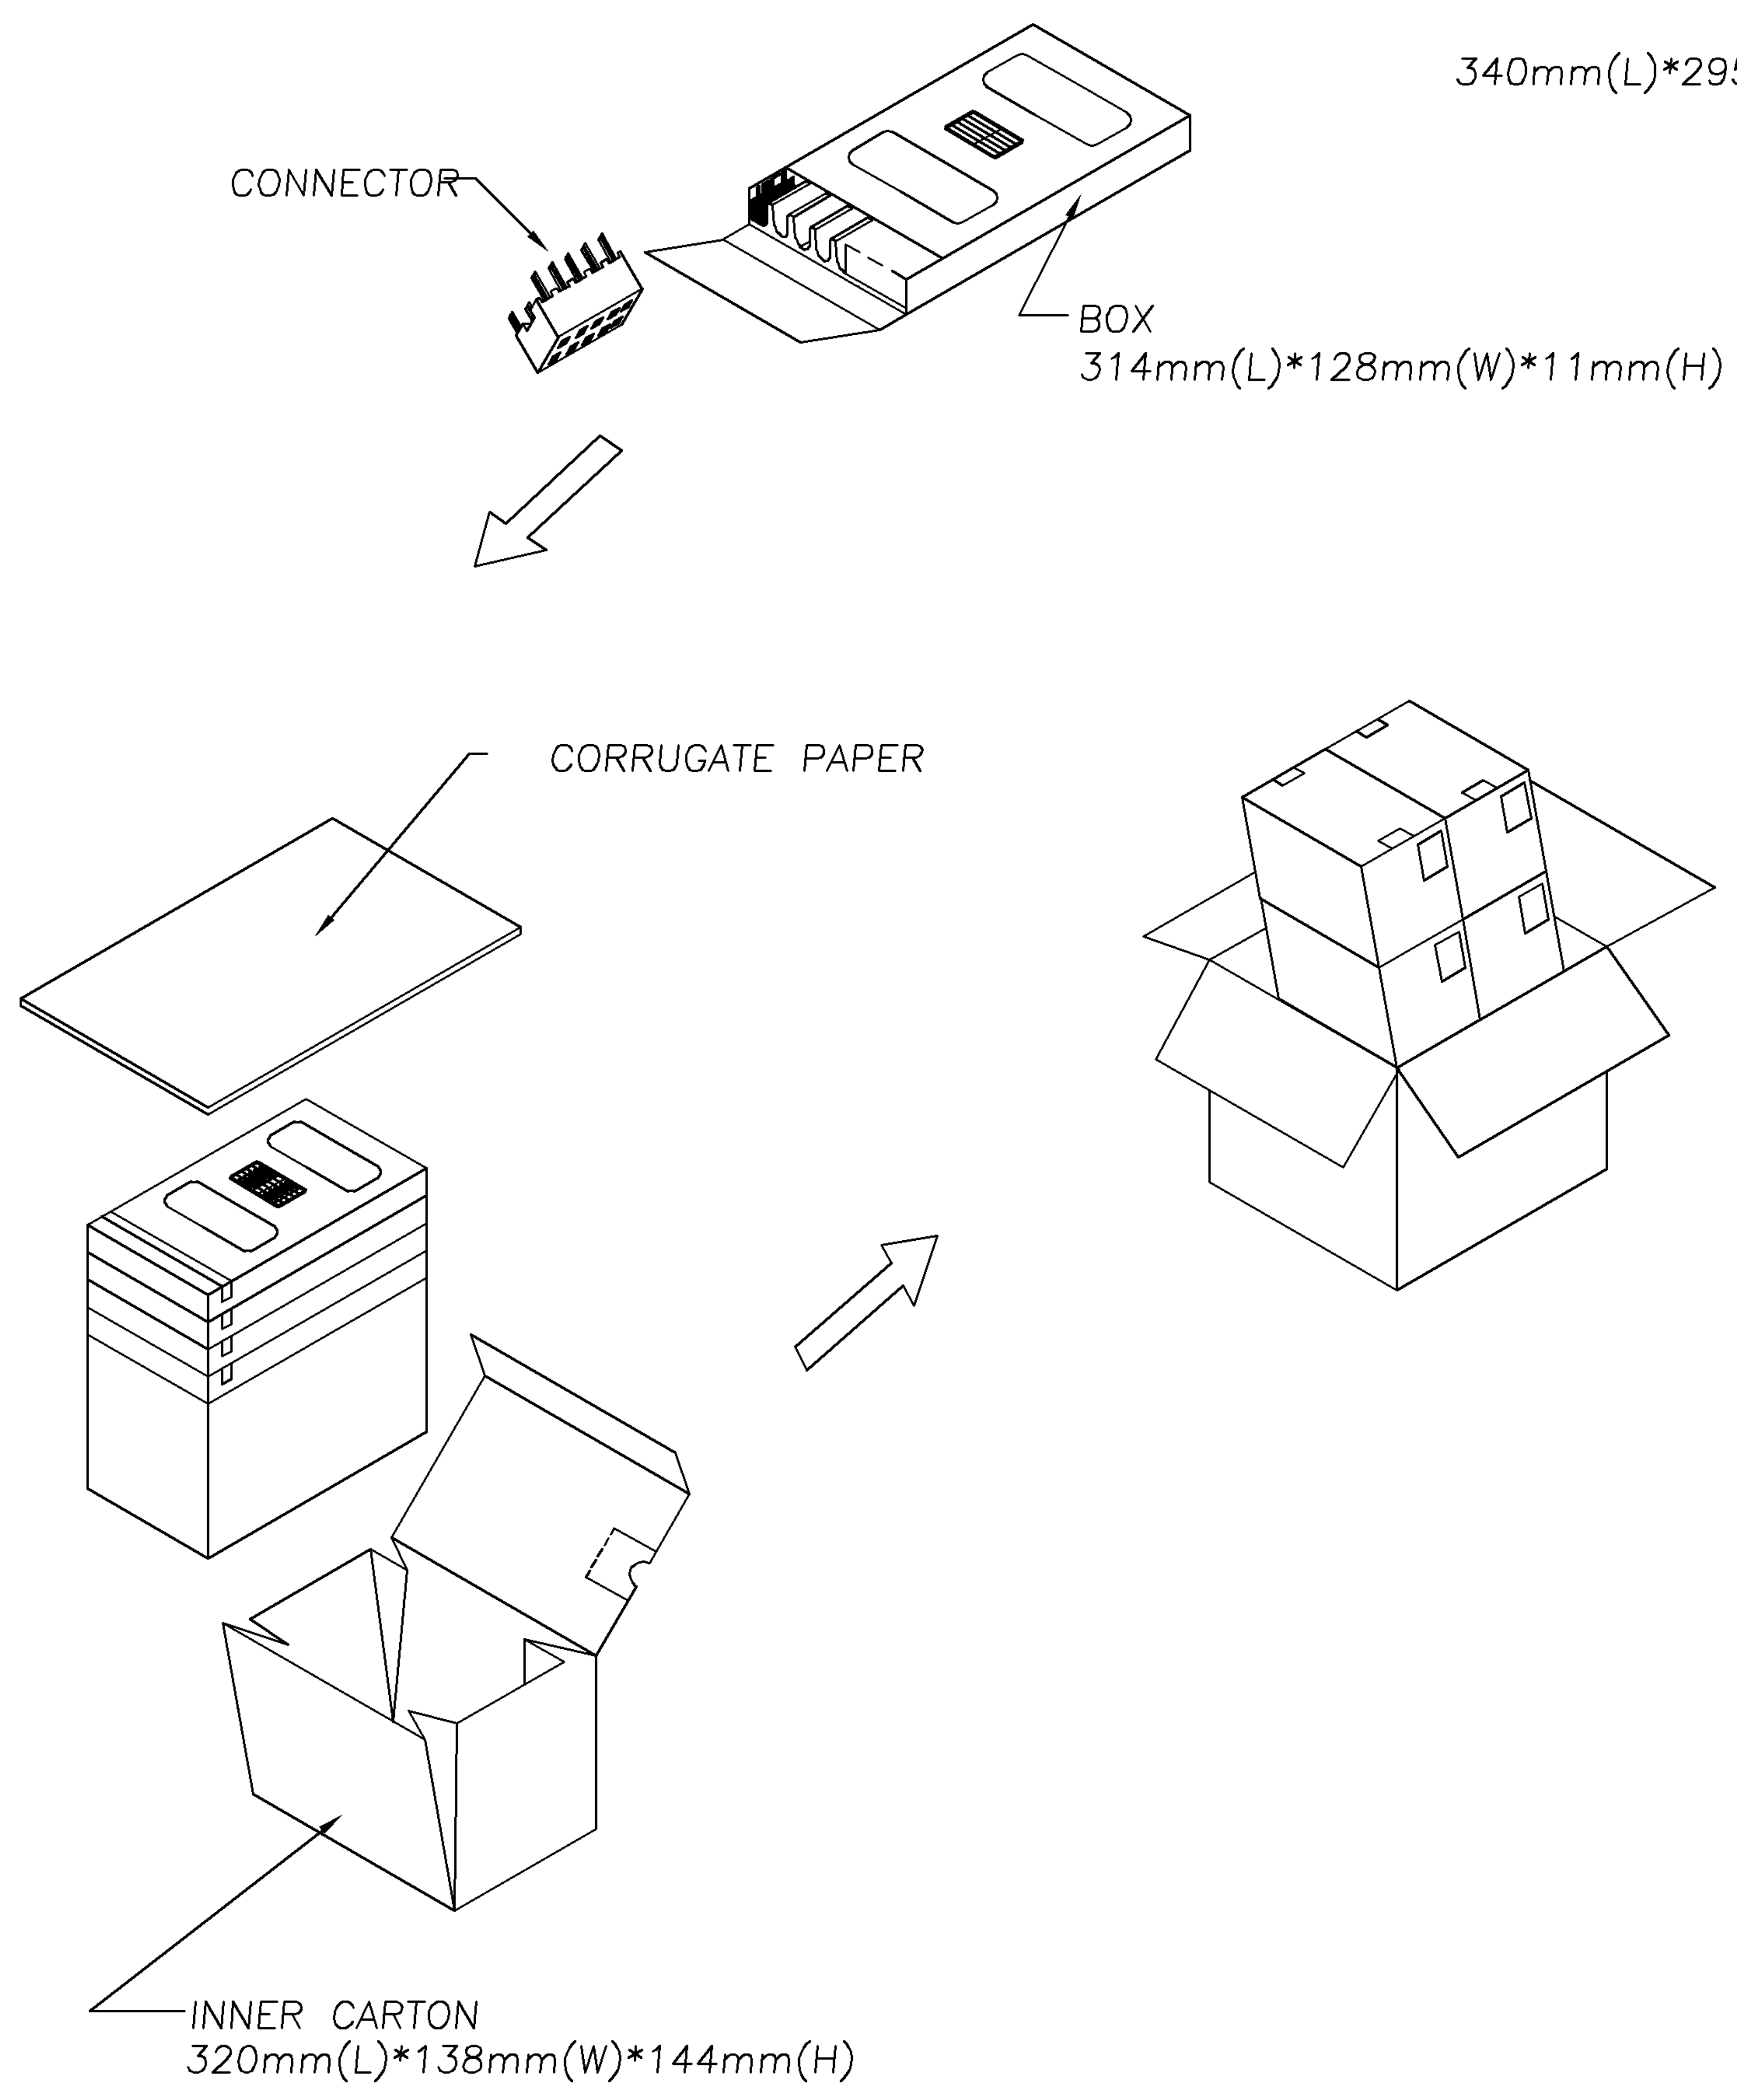

2.6±0.1	5040	1260	105	40	9-	-9
	4320	1080	90	50	9-	-8
	4320	1080	90	48	9-	-7
	4320	1080	90	46	9-	-6
	4320	1080	90	44	9-	-5
	5040	1260	105	42	9-	-4
	5040	1260	105	40	9-	-3
	5040	1260	105	38	9-	-2
	5760	1440	120	36	9-	-1
	5760	1440	120	34	9-	-0
	6480	1620	135	32	8-	-9
	7200	1800	150	30	8-	-8
	7200	1800	150	28	8-	-7
	7920	1980	165	26	8-	-6
	8640	2160	180	24	8-	-5
	9360	2340	195	22	8-	-4
	10080	2520	210	20	8-	-3
	11520	2880	240	18	8-	-2
	12960	3240	270	16	8-	-1
	15120	3780	315	14	8-	-0
17280	4320	360	12	7-	-9	
20880	5220	435	10	7-	-8	
26640	6660	555	8	7-	-7	
35280	8820	735	6	7-	-6	
51840	12960	1080	4	7-1734506-5	-4	
4320	1080	90	50	7-	-4	
4320	1080	90	48	7-	-3	
4320	1080	90	46	7-	-2	
4320	1080	90	44	7-	-1	
5040	1260	105	42	7-	-0	
5040	1260	105	40	6-	-9	
5040	1260	105	38	6-	-8	
5760	1440	120	36	6-	-7	
5760	1440	120	34	6-	-6	
6480	1620	135	32	6-	-5	
7200	1800	150	30	6-	-4	
7200	1800	150	28	6-	-3	
7920	1980	165	26	6-	-2	
8640	2160	180	24	6-	-1	
9360	2340	195	22	6-	-0	
10080	2520	210	20	5-	-9	
11520	2880	240	18	5-	-8	
12960	3240	270	16	5-	-7	
15120	3780	315	14	5-	-6	
17280	4320	360	12	5-	-5	
20880	5220	435	10	5-	-4	
26640	6660	555	8	5-	-3	
35280	8820	735	6	5-	-2	
51840	12960	1080	4	5-1734506-1	-1	

2.6±0.1	5040	1260	105	40	4-	-9
	4320	1080	90	50	4-	-8
	4320	1080	90	48	4-	-7
	4320	1080	90	46	4-	-6
	4320	1080	90	44	4-	-5
	5040	1260	105	42	4-	-4
	5040	1260	105	40	4-	-3
	5040	1260	105	38	4-	-2
	5760	1440	120	36	4-	-1
	5760	1440	120	34	4-	-0
	6480	1620	135	32	3-	-9
	7200	1800	150	30	3-	-8
	7200	1800	150	28	3-	-7
	7920	1980	165	26	3-	-6
	8640	2160	180	24	3-	-5
	9360	2340	195	22	3-	-4
	10080	2520	210	20	3-	-3
	11520	2880	240	18	3-	-2
	12960	3240	270	16	3-	-1
	15120	3780	315	14	3-	-0
17280	4320	360	12	2-	-9	
20880	5220	435	10	2-	-8	
26640	6660	555	8	2-	-7	
35280	8820	735	6	2-	-6	
51840	12960	1080	4	2-1734506-5	-4	
4320	1080	90	50	2-	-4	
4320	1080	90	48	2-	-3	
4320	1080	90	46	2-	-2	
4320	1080	90	44	2-	-1	
5040	1260	105	42	2-	-0	
5040	1260	105	40	1-	-9	
5040	1260	105	38	1-	-8	
5760	1440	120	36	1-	-7	
5760	1440	120	34	1-	-6	
6480	1620	135	32	1-	-5	
7200	1800	150	30	1-	-4	
7200	1800	150	28	1-	-3	
7920	1980	165	26	1-	-2	
8640	2160	180	24	1-	-1	
9360	2340	195	22	1-	-0	
10080	2520	210	20		-9	
11520	2880	240	18		-8	
12960	3240	270	16		-7	
15120	3780	315	14		-6	
17280	4320	360	12		-5	
20880	5220	435	10		-4	
26640	6660	555	8		-3	
35280	8820	735	6		-2	
51840	12960	1080	4		1734506-1	

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± ANGLES ±	DWN	O. HU	TYCO HOLDINGS (BERMUDA) VII LTD. TAIWAN BRANCH
		23-MAR-2006	
MATERIAL SEE NOTE	APVD	W.J. KE	NAME AMPMODU 2.0MM PITCH, REC CONN, VERTICAL, MOUNT TYPE
		23-MAR-2006	
FINISH SEE NOTE	QUALIFICATION TEST REPORT	---	LOC DW A ₃ DRAWING NO C-1734506 REV A
	WEIGHT	---	SCALE --- SHEET 2 OF 2

SEE SHEET 1.	ECN	DWN	CHK	DATE
LTR	REVISION RECORD			

8 7 6 5 4 3 2 1
CUSTOMER DRAWING