

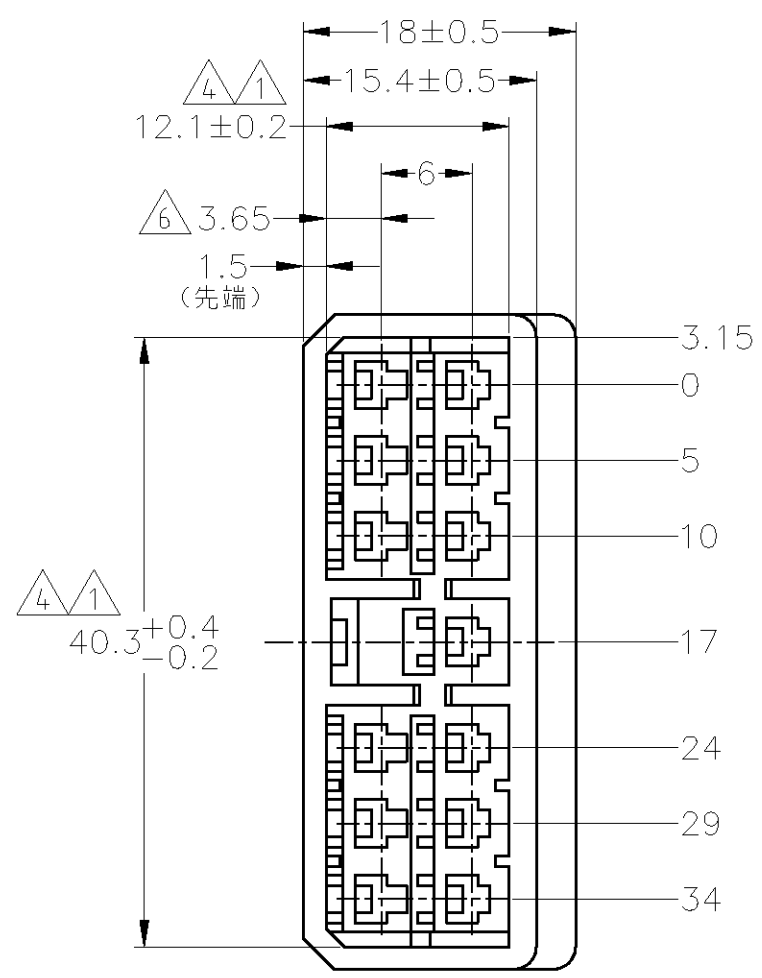


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT BY TYCO ELECTRONICS CORPORATION. ALL INTERNATIONAL RIGHTS RESERVED.

LOC	DIST	REVISIONS						
		P	LTR	DESCRIPTION	DATE	DWN	APVD	
J	-		C2	REVISED	ECR-10-004036	25FEB10	TS	KB

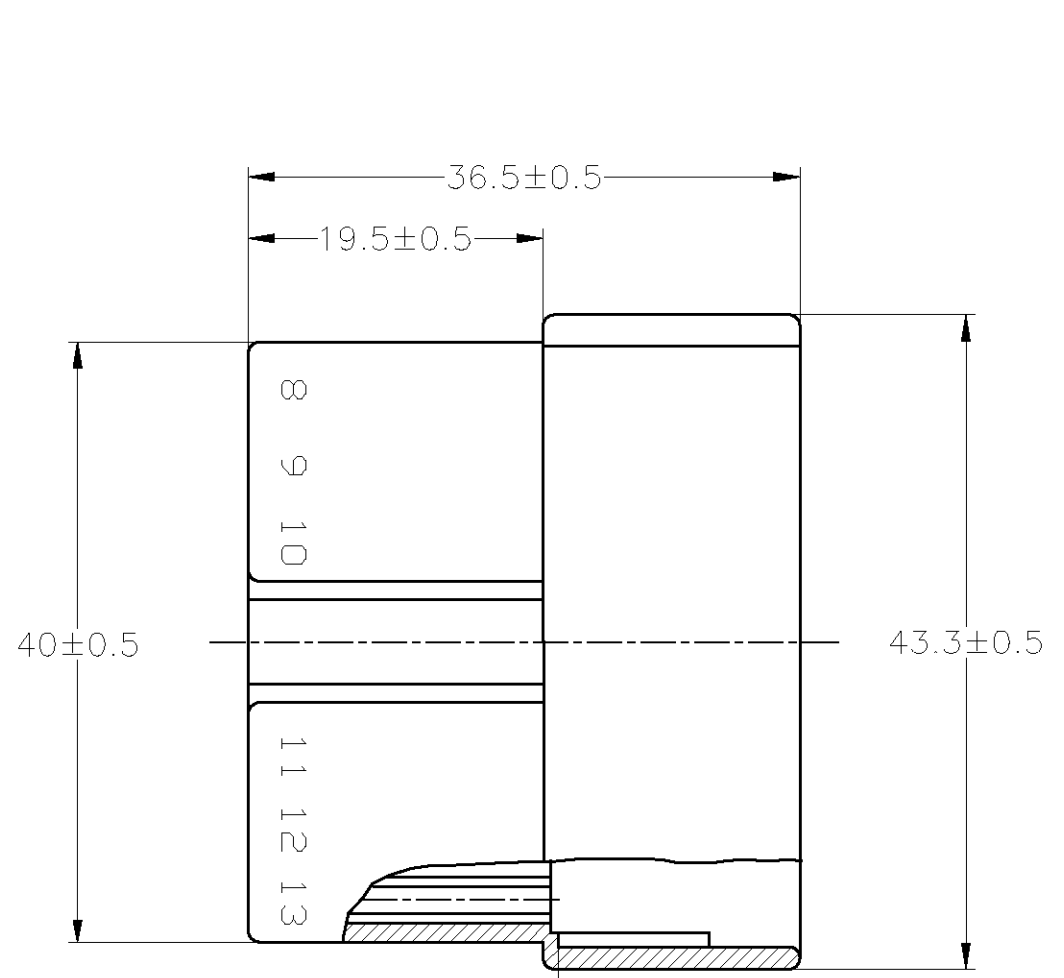

- ① IN COUPLING WITH THE PLUG HOUSING. MATING SATISFIES FUNCTION.
  - 2. APPLIDE CONTACT PN: 170221, 170222
  - 3. PRODUCT SPEC. NO. 108-5099
  - ④ TO BE MEASURED WITHIN 2mm FROM -A-
  - 5. IN COUPLING WITH THE PLUG HOUSING MATING FORCE 29.4N MAX. WITHOUT RECEPTACLE CONTACTS.
  - ⑥ CENTERLINE OF CONTACT
- ① 相手ハウジングと所定の機能を満たして嵌合できること。
  - 2. 使用コンタクト型番; 170221及び170222, その他。
  - 3. 製品規格番号; 108-5099
  - ④ -A- 面より2mmの範囲で測定。
  - 5. 相手ハウジングとの嵌合力は、29.4N 以上  
但し、コンタクトは含まない。
  - ⑥ コンタクトセンター迄の距離

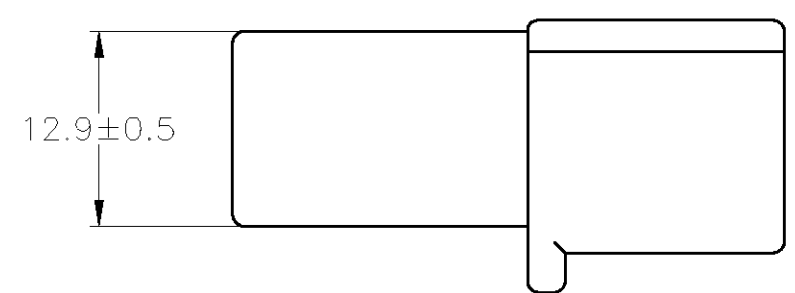

OBSELETE	灰 GRAY	171725-6
	緑 GREEN	171725-4
OBSELETE	茶 BROWN	171725-3
OBSELETE	黒 BLACK	171725-2
	自然色 NATURAL	171725-1
	色 COLOR	型番 PART NUMBER

一般公差  
(GENERAL TOLERANCE)

10 <sub>2</sub>	: ±0.2
30 <sub>2</sub>	> 10 : ±0.25
100 <sub>2</sub>	> 30 : ±0.3
ANGLE : ±3°	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.SHINOHARA 14MAR07	Tyco Electronics Corporation Kawasaki, Japan	
DIMENSIONS: 単位: 耗 mm		CHK K.BETSUI 14MAR07	NAME 名称	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 一般公差		APVD K.BETSUI 14MAR07	MULTI-INTER LOCK CONNECTOR 13POSITION CAP HOUSING	
0 PLC ±-		PRODUCT SPEC 製品規格	SIZE A3	CAGE CODE 00779
1 PLC ±-		SEE NOTE 3	DRAWING NO. C-171725	RESTRICTED TO
2 PLC ±-		APPLICATION SPEC 取付適用規格	SCALE 2:1	SHEET 1 OF 1
3 PLC ±-		WEIGHT -	REV C2	
4 PLC ±-		CUSTOMER DRAWING		
ANGLES ±-				
FINISH 仕上 -				
MATERIAL 材料 66 NYLON (UL94V-2)				