

AMP-BARREL | Special Purpose Terminals

TE Internal #: 1742254-2

PCB Terminals, Receptacle, PCB Hole Diameter 1.27 – 1.37 mm [.05 – .054 in], 28 – 22 AWG Wire Size, .08 – .4 mm² Wire Size, Special

Purpose Terminals

View on TE.com >



Terminals & Splices > PCB Terminals











PCB Terminal Type: Receptacle

PCB Thickness (Recommended): 1.19 – 1.57 mm [.047 – .094 in]

PCB Hole Diameter: 1.27 – 1.37 mm [.05 – .054 in]

Profile Height from PCB: 5.33 mm [.212 in]

Accepts Wire Insulation Diameter (Max): 1.35 mm [.053 in]

Features

Product Type Features

Insertion Force	Normal
Compatible With Discrete Wire Type	Solid, Stranded

Configuration Features

Stud Hole	No
Terminal Angle	180°

Contact Features

Contact Plating Material	Tin
Crimp Type	IDC
PCB Terminal Type	Receptacle
Terminal Plating Material	Pre-Tin
Contact Underplating Material	Nickel
Terminal Orientation	Straight

Termination Features

Termination Method to Printed Circuit Board	Through Hole - Solder



Product Terminates To	Printed Circuit Board
Mechanical Attachment	
Wire Insulation Support	With
Dimensions	
Extension Below Board	2.37 mm[.093 in]
PCB Thickness (Recommended)	1.19 – 1.57 mm[.047 – .094 in]
PCB Hole Diameter	1.27 – 1.37 mm[.05 – .054 in]
Profile Height from PCB	5.33 mm[.212 in]
Accepts Wire Insulation Diameter (Max)	1.35 mm[.053 in]
Accepts Wire Insulation Diameter Range	1.35 mm[.053 in]
Wire Size	.08 – .4 mm²
Usage Conditions	
Insulation Option	Uninsulated
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Industry Standards	
UL Rating	Recognized
Packaging Features	
Packaging Quantity	12000
Packaging Method	Reel
Other	
Comment	Accepts two wires of the same gage and type., Solder resist material on the inside of barrel prevents solder wicking.

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold:



Not Yet Reviewed

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per
	homogenous material. Also BFR/CFR/PVC
	Free


Solder Process Capability

Wave solder capable to 265°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Also in the Series | Special Purpose Terminals

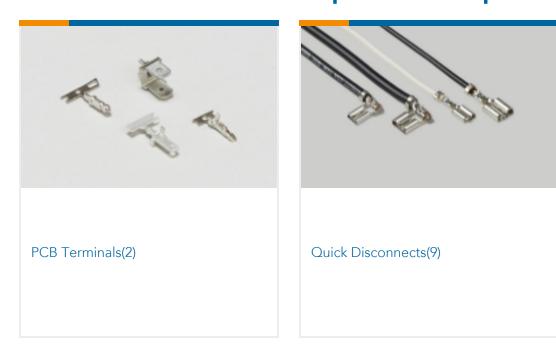

Customers Also Bought















Documents

Product Drawings

AMP BARREL TERMINAL 22-28 AWG TNIPPHBZ

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1742254-2_C3.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1742254-2_C3.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1742254-2_C3.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages

PRINTED CIRCUIT BOARD TERMINALS AND DISCONNECTS

English

Product Specifications

Application Specification

English

AMP-BARREL Terminals

English

Product Environmental Compliance

TE Material Declaration

English