
180908-1 🗸 ACTIVE

FASTIN-FASTON | FASTIN-FASTON 250

TE Internal #: 180908-1 Crimp Terminal Housings, Tab, Tab Housing, 2 Position, Straight, Red, Polyamide, Contact Mating Retention, Mating Alignment, FASTIN-FASTON 250

View on TE.com >

Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

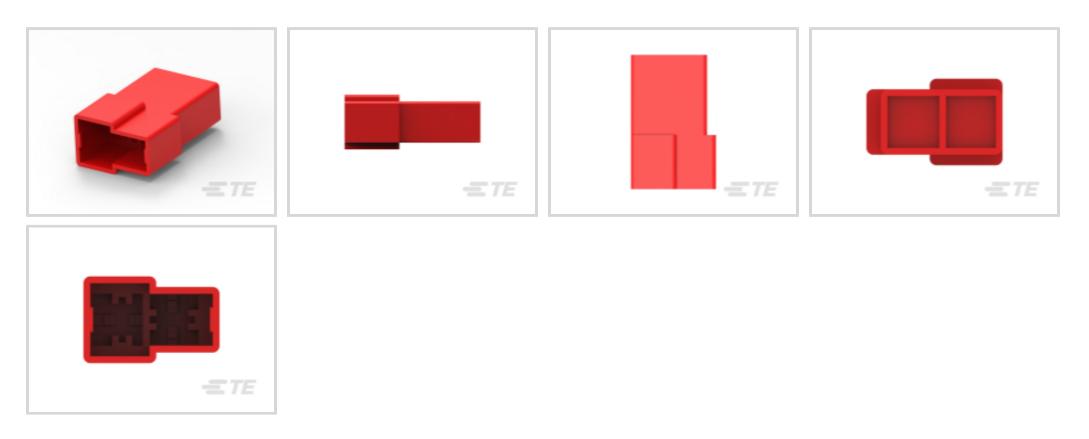

Terminal Type: Tab Housing Type: Tab Housing

Number of Positions: 2

Terminal Orientation: Straight

Primary Product Color: Red

Features



Product Type Features

| Terminates To | Wire & Cable |
|--------------------------|------------------|
| Product Type | Terminal Housing |
| Sealable | No |
| Housing Type | Tab Housing |
| Insulated | No |
| Configuration Features | |
| Number of Positions | 2 |
| Body Features | |
| Primary Product Color | Red |
| Contact Features | |
| Terminal Type | Tab |
| Terminal Orientation | Straight |
| Contact Mating Retention | With |

180908-1

Crimp Terminal Housings, Tab, Tab Housing, 2 Position, Straight, Red, Polyamide, Contact Mating Retention, Mating Alignment, FASTIN-FASTON 250



Mechanical Attachment

| Mating Alignment | With | | | |
|---|----------------------------|--|--|--|
| Crimp Terminal Housing Mounting Style | Cable Mount (Free-Hanging) | | | |
| Housing Features | | | | |
| Housing Material | Polyamide | | | |
| Centerline (Pitch) | 7.4 mm[.291 in] | | | |
| Dimensions | | | | |
| Length | 31.5 mm[1.24 in] | | | |
| Usage Conditions | | | | |
| Operating Temperature Range | -40 – 105 °C[-40 – 221 °F] | | | |
| Packaging Features | | | | |
| Packaging Quantity | 3000 | | | |
| Packaging Method | Carton | | | |
| | | | | |
| Product Compliance | | | | |
| For compliance documentation, visit the product page on TE.com> | | | | |

EU RoHS Directive 2011/65/EU

Compliant

| EU ELV Directive 2000/53/EC | Compliant | | |
|---|--|--|--|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold | | |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed | | |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free | | |
| | | | |

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides


180908-1

Crimp Terminal Housings, Tab, Tab Housing, 2 Position, Straight, Red, Polyamide, Contact Mating Retention, Mating Alignment, FASTIN-FASTON 250




on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts

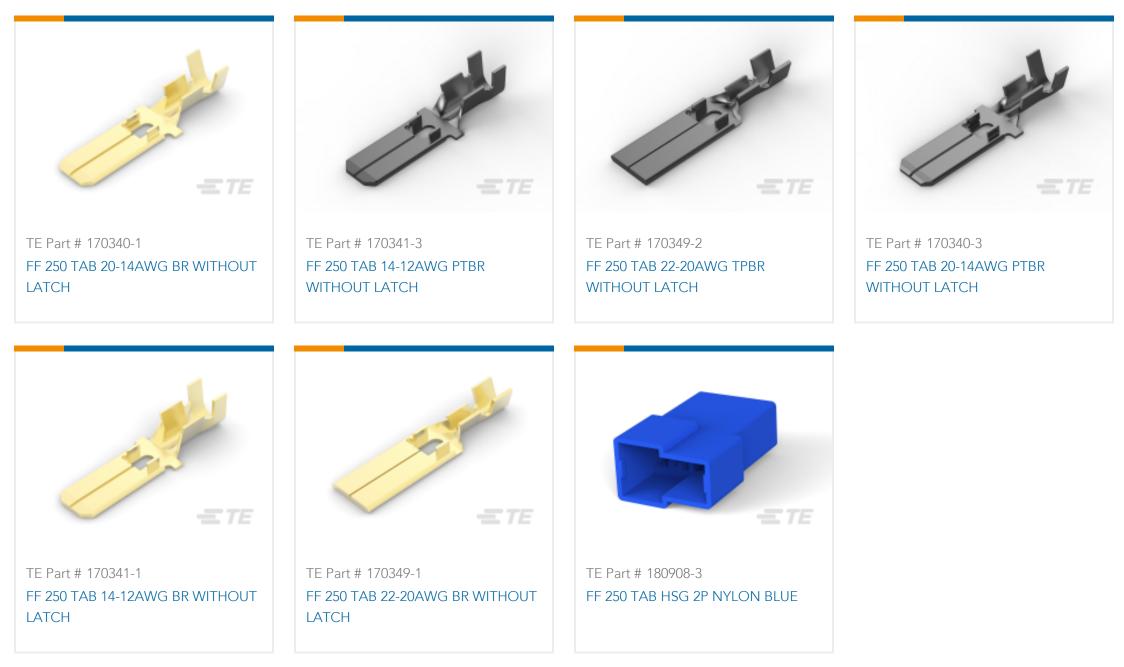

Also in the Series | FASTIN-FASTON 250



| | | | and the second sec |
|------------------------------|---------------------------------|------------------|--|
| Crimp Terminal Housings(218) | Insertion & Extraction Tools(2) | PCB Terminals(2) | Quick Disconnects(255) |

Customers Also Bought



180908-1

Crimp Terminal Housings, Tab, Tab Housing, 2 Position, Straight, Red, Polyamide, Contact Mating Retention, Mating Alignment, FASTIN-FASTON 250





Documents

Product Drawings FF 250 TAB HSG 2P NYLON RED

English

CAD Files

Customer View Model ENG_CVM_CVM_180908-1_AB.2d_dxf.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_180908-1_AB.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_180908-1_AB.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages White Paper: Nylon Discoloration

English

Product Specifications Application Specification

English

Agency Approvals UL Report

English