AMP | AMP MCP 1.5K, AMP MCP Connector System

TE Internal #: 1823467-8

Housing for Female Terminals, Wire-to-Device / Wire-to-Board, 6 Position, .157 in [4 mm] Centerline, Sealable, Gray, Signal, Hybrid

View on TE.com >



Connectors > Automotive Connectors > Connector Housings > AMP MCP, SEALED CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: 1.5 mm [.059 in]

Connector System: Wire-to-Board, Wire-to-Device

Number of Positions: 6

Centerline (Pitch): 4 mm [.157 in]

All AMP MCP, SEALED CONNECTOR HOUSING (158)

Features

Product Type Features

Product Type Features	
Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	6
Number of Rows	2
Electrical Characteristics	
Operating Voltage	14 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°
Body Material	PA
Primary Product Color	Gray

Н

Connector Code



Contact Features

Contact Size	1.5K
Contact Type	Receptacle
Mating Tab Width	1.5 mm[.059 in]

Mechanical Attachment

Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Without
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Housing Features

Dimensions

Product Width	36.4 mm[1.433 in]
Product Length	25.5 mm[1.004 in]
Product Height	27.3 mm[1.075 in]
Row-to-Row Spacing	2.54 mm[.1 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C, 145 °C, 150 °C[158 °F][167 °F][176 °F] [185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F][293 °F][302 °F]
Operating Temperature Range	-40 - 150 °C[-40 - 302 °F]

Operation/Application

Circuit Application	Signal	
Packaging Features		
Packaging Quantity	450	
Packaging Method	Box	

Other

Serviceable	Yes	
Connector Position Assurance Capable	No	



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts















Also in the Series | AMP MCP 1.5K



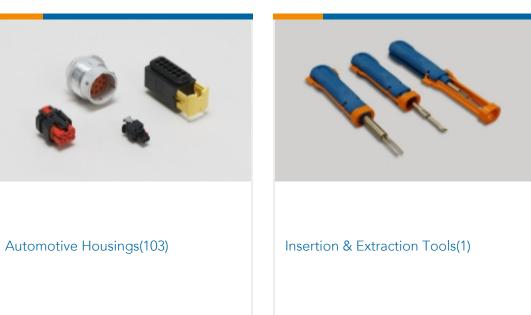

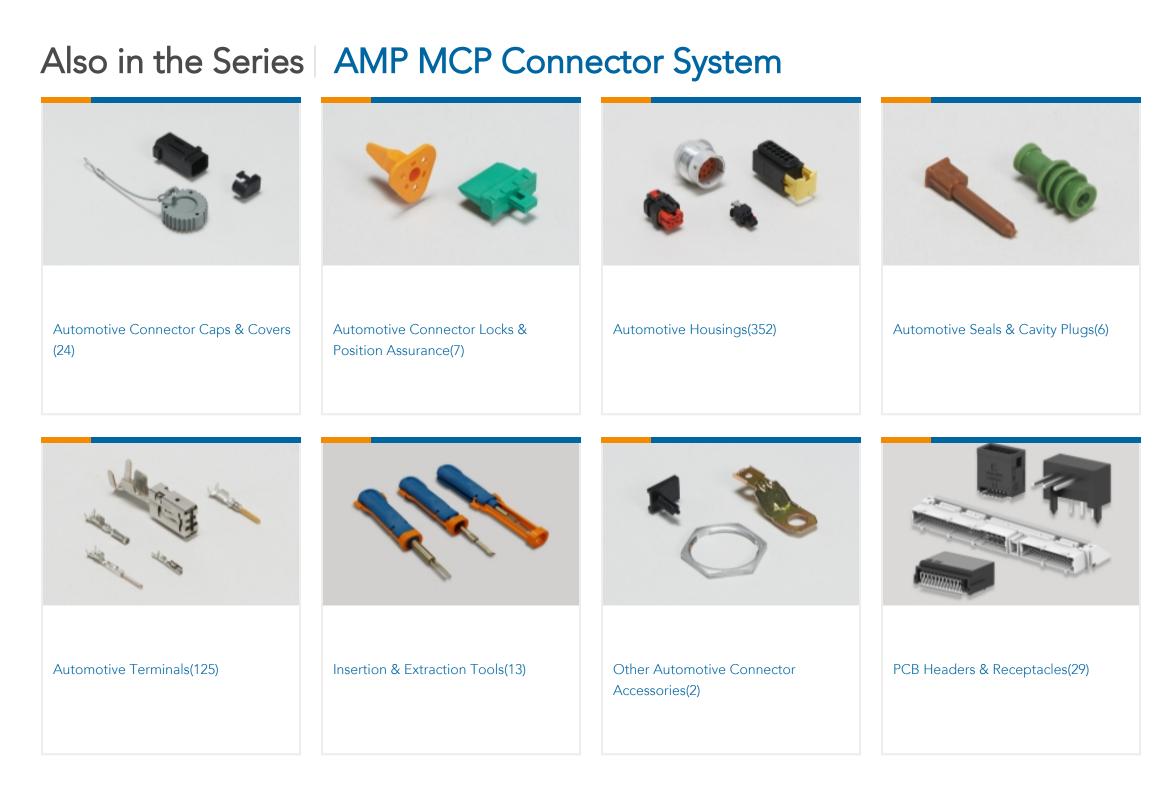

Customers Also Bought















Documents

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1823467-8_C.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1823467-8_C.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1823467-8_C.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Termination_4-14p_radial_seal_1.6mm_tab

German

Application Specification

German