
1827625-1 - ACTIVE

TE Internal #: 1827625-1 PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 3 mm [.118 in], Length .173 in [4.4 mm], Width 1.4 mm [.055 in]

View on TE.com >



Connectors > PCB Connectors > Board-to-Board Connectors > PCB Spring Contacts

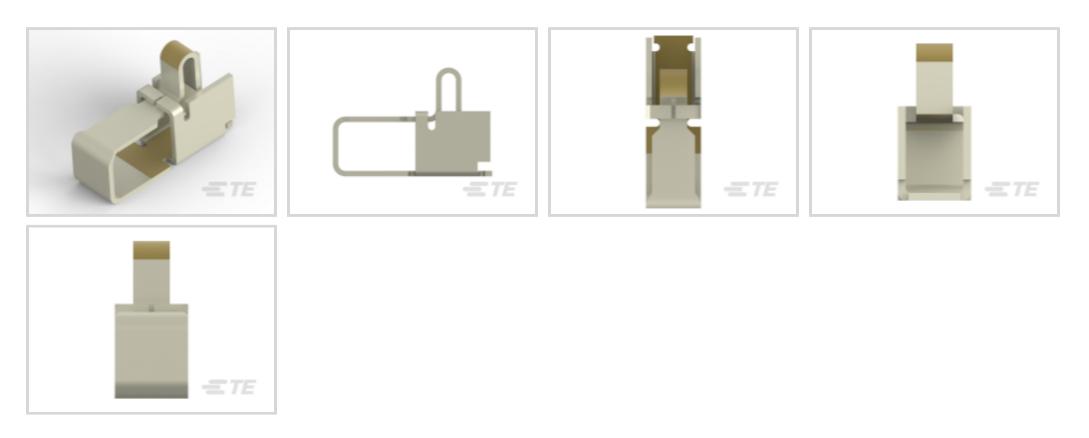

Spring Finger Type: Preloaded - C-Clip

Scalable: No

Side Protected: Yes

Uncompressed Height: 3 mm [.118 in]

Contact Length: 4.4 mm [.173 in]

Features

Product Type Features

| Spring Finger Type | Preloaded - C-Clip |
|---|-----------------------|
| Scalable | No |
| Connector System | Board-to-Board |
| Sealable | No |
| Connector & Contact Terminates To | Printed Circuit Board |
| Configuration Features | |
| Side Protected | Yes |
| Number of Positions | 1 |
| Contact Features | |
| Contact Underplating Material | Nickel |
| PCB Contact Termination Area Plating Material | Gold |
| Contact Base Material | Copper Alloy |
| Contact Length | 4.4 mm[.173 in] |
| Contact Width | 1.4 mm[.055 in] |

1827625-1

PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 3 mm [.118 in], Length .173 in [4.4 mm], Width 1.4 mm [.055 in]



| Contact Working Range (Low) | 2 mm[.079 in] |
|--|---------------------------|
| Contact Working Range (High) | 2.8 mm[.11 in] |
| Point of Contact Area Plating Material | Gold |
| Contact Current Rating (Max) | 1.5 A |
| Dimensions | |
| Uncompressed Height | 3 mm[.118 in] |
| Usage Conditions | |
| Operating Temperature Range | -40 – 85 °C[-40 – 185 °F] |
| Operation/Application | |
| Circuit Application | Signal |
| Packaging Features | |
| Packaging Quantity | 2500 |
| Packaging Method | Tape & Reel |

Product Compliance

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2 | 2011/65/EU |
|---------------------|------------|
|---------------------|------------|

Compliant

| EU ELV Directive 2000/53/EC | Compliant |
|---|--|
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold |
| EU REACH Regulation (EC) No. 1907/2006 | Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed |
| Halogen Content | Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free |
| | |

Solder Process Capability

Reflow solder capable to 260°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

1827625-1

PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 3 mm [.118 in], Length .173 in [4.4 mm], Width 1.4 mm [.055 in]



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought





Documents

CAD Files

3D PDF

English

Customer View Model

ENG_CVM_1827625-1_A1.2d_dxf.zip

English

Customer View Model

ENG_CVM_1827625-1_A1.3d_igs.zip

English

Customer View Model

ENG_CVM_1827625-1_A1.3d_stp.zip

1827625-1

PCB Spring Contact, Preloaded - C-Clip, Side Protected, Uncompressed Height 3 mm [.118 in], Length .173 in [4.4 mm], Width 1.4 mm [.055 in]



English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Spring Fingers Quick Reference Guide

English

Product Specifications Product Specification

English

Product Environmental Compliance MD_1827625-1_0512201664_dmtec

English

MD_1827625-1_0512201664_dmtec

English