


Power Double Lock

TE Internal #: 179862-1 Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, .255 in [6.5 mm] Centerline, Wire & Cable, Power Double Lock

View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Plug

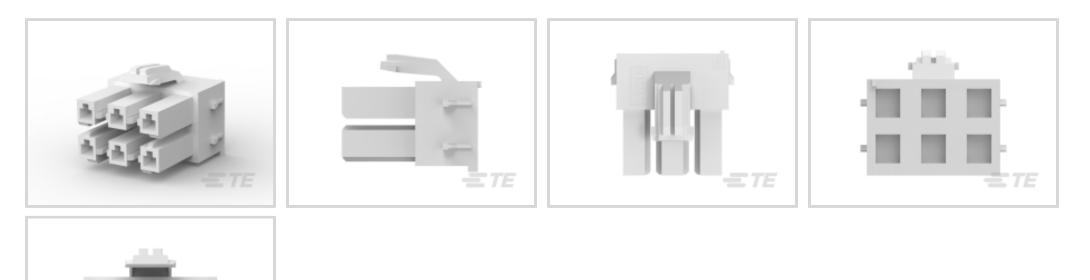

Rectangular Power Connector Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Board, Wire-to-Wire Number of Positions: 6

Centerline (Pitch): 6.5 mm [.255 in]

All STD Temp Power Double Lock Plug (68)



Features

Product Type Features

Rectangular Power Connector Type	Housing			
Connector & Housing Type	Plug			
Connector System	Wire-to-Board, Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	6			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	300 VAC			
Contact Features				
Contact Layout	Matrix			

Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, .255 in [6.5 mm] Centerline, Wire & Cable, Power Double Lock



Contact Retention Within Housing	Without
Contact Type	Receptacle
Termination Features	
Termination Method to Wire & Cable	Crimp
Wire/Cable Type	Discrete Wire
Wire Type	Stranded
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	6.5 mm[.255 in]
Housing Color	Natural
Housing Material	Nylon 6/6
Dimensions	
Row-to-Row Spacing	6.5 mm[.256 in]
Usage Conditions	
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]

Operation/Application

Circuit Application	Power & Signal				
Industry Standards					
UL Flammability Rating	UL 94V-0				
Glow Wire Rating	Standard Part - Not Glow Wire				
Agency/Standard Number	UL 1977				
Agency/Standard	UL				
Packaging Features					
Packaging Method	Bag				
Packaging Quantity	100				
Other					
For Use With	Contacts: 177914 or 177915, Double Lock Plate 316062-1, Header: 179849				

Product Compliance

For compliance documentation, visit the product page on TE.com>

Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, .255 in [6.5 mm] Centerline, Wire & Cable, Power Double Lock



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-





Compatible Parts




Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, .255 in [6.5 mm] Centerline, Wire & Cable, Power Double Lock



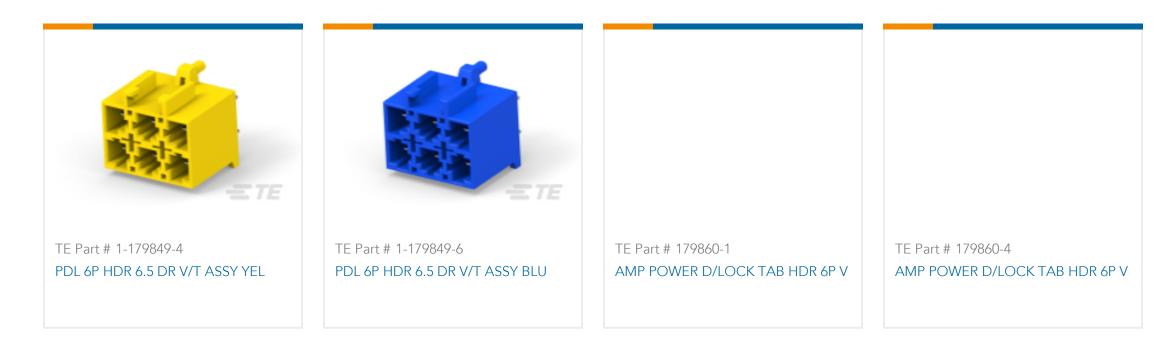




Also in the Series | Power Double Lock

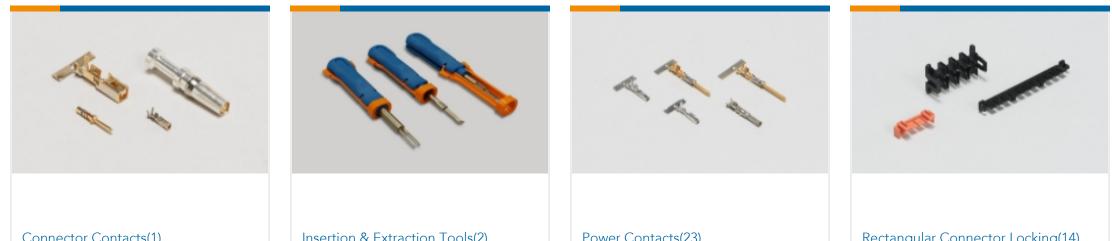

Connector Contacts(1)	Insertion & Extraction Tools(2)	Power Contacts(23)	Rectangular Connector Locking(14)



Customers Also Bought



Rectangular Power Connectors, Housing, Plug, Wire-to-Board / Wire-to-Wire, 6 Position, .255 in [6.5 mm] Centerline, Wire & Cable, Power Double Lock



Documents

Product Drawings AMP POWER D/LOCK PLUG HSG 6P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_179862-1_N.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_179862-1_N.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_179862-1_N.3d_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG

English

Product Specifications

Product Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals

UL Report

English

UL Report

English