

#### Sensor Flat Contact System

TE Internal #: 1801179-5 Housing for Female Terminals, Wire-to-Wire, 3 Position, .131 in [3.33 mm] Centerline, Sealable, Green, Signal, Sensor Flat Contact System

#### View on TE.com >

Connectors > Automotive Connectors > Connector Housings



Connector & Housing Type: Housing for Female Terminals Mating Tab Width: 1.5 mm [.059 in ]

Connector System: Wire-to-Wire

Number of Positions: 3

Centerline (Pitch): 3.33 mm [.131 in ]

## Features



### Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	3
Number of Rows	1
Electrical Characteristics	
Operating Voltage	16 VDC
Nominal Voltage Architecture	12 V
Body Features	
Cable Exit Angle	180°

Housing for Female Terminals, Wire-to-Wire, 3 Position, .131 in [3.33 mm] Centerline, Sealable, Green, Signal, Sensor Flat Contact System



Body Material	PBT GF					
Primary Product Color	Green					
Connector Code	5					
Contact Features						
Contact Size	1.5mm					
Contact Type	Receptacle					
Mating Tab Width	1.5 mm[.059 in]					
Mechanical Attachment						
Mounting Feature	Without					
Terminal Position Assurance	Yes					
Strain Relief	Add By Accessory					
Mating Alignment Type	Keyed					
Mating Alignment	With					
Connector Mounting Type	Cable Mount (Free-Hanging)					
Housing Features						
Centerline (Pitch)	3.33 mm[.131 in]					

#### Dimensions

Product Width	35.05 mm[1.38 in]
Product Length	21.33 mm[.84 in]
Product Height	21 mm[.827 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 ° C, 145 °C, 150 °C[158 °F][167 °F][176 °F] [185 °F][194 °F][212 °F][221 °F][230 °F][248 ° F][257 °F][266 °F][284 °F][293 °F][302 °F]
Operating Temperature Range	-40 – 150 °C[-40 – 302 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Degree of Protection	IP69K
UL Flammability Rating	UL 94HB
Other	

**C** For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 3 Position, .131 in [3.33 mm] Centerline, Sealable, Green, Signal, Sensor Flat Contact System



Serviceable	Yes								
Connector Position Assurance Capable	Yes								
Product Compliance									
For compliance documentation, visit the product page on TE.com>									
EU RoHS Directive 2011/65/EU	Compliant								
EU ELV Directive 2000/53/EC	Compliant								
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold								
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed								
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.								
Solder Process Capability	Not applicable for solder process capability								

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



Housing for Female Terminals, Wire-to-Wire, 3 Position, .131 in [3.33 mm] Centerline, Sealable, Green, Signal, Sensor Flat Contact System







# Also in the Series | Sensor Flat Contact System









Insertion & Extraction Tools(7)

Automotive Connector Caps & Covers

Automotive Housings(56)

Automotive Terminals(23)

Automotive connector caps & covers	Automotive Housings(50)	Automotive reminais(20)	moortio
(12)			

# Customers Also Bought






TE Part #DT04-2P DEUTSCH DT Series Housings & Connectors






TE Part #282104-1 AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

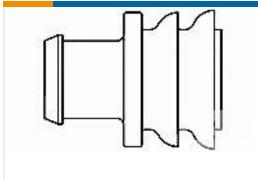

TE Part #281934-2 SINGLE WIRE SEAL

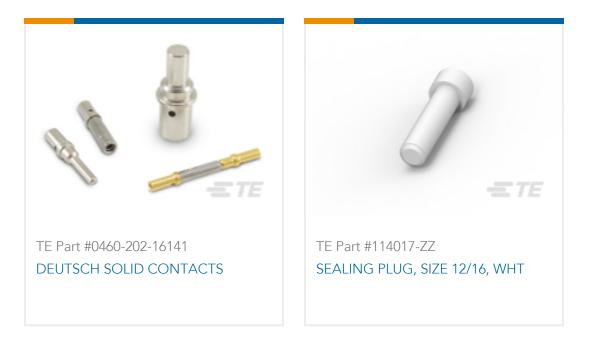

Housing for Female Terminals, Wire-to-Wire, 3 Position, .131 in [3.33 mm] Centerline, Sealable, Green, Signal, Sensor Flat Contact System



## Documents

**Product Drawings 3W RECEPTACLE HPSL CONNECTOR GREEN** 

English

#### **CAD** Files

**Customer View Model** ENG\_CVM\_CVM\_1801179-5\_D.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** ENG\_CVM\_CVM\_1801179-5\_D.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_1801179-5\_D.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

**Product Specifications** 

**Product Specification** 

English

**Instruction Sheets** Instruction Sheet (non U.S.)

English