

Printed-circuit board connector - MC 0,5/15-G-2,54 P20 THR R56 - 1821371

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Header, Nominal current: 6 A, Rated voltage (III/2): 160 V, Number of positions: 15, Pitch: 2.54 mm, Color: black, Contact surface: Gold, Mounting: THR soldering, Sample values available under SAMPLE MC...



The illustration shows the 10-position version

Why buy this product

- ✓ Designed for integration into the SMT soldering process
- ✓ Additional solder anchors reduce the mechanical strain on the soldering spots
- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting



Key Commercial Data

Packing unit	465 STK
Minimum order quantity	465 STK
GTIN	
GTIN	4046356789530
Weight per Piece (excluding packing)	3.160 g
Custom tariff number	85366930
Country of origin	Germany
Note	Made to Order (non-returnable)

Technical data

Dimensions

Length	7.1 mm
Pitch	2.54 mm
Dimension a	35.56 mm
Width	42.68 mm
Constructional height	4.85 mm

Printed-circuit board connector - MC 0,5/15-G-2,54 P20 THR R56 - 1821371

Technical data

Dimensions

Height	6.85 mm
Length of the solder pin	2 mm
Pin dimensions	0,64 x 0,64
Pin spacing	2.54 mm
Hole diameter	1.2 mm

General

Range of articles	MC 0,5/...-G-THR
Insulating material group	IIIa
Rated surge voltage (III/3)	2.5 kV
Rated surge voltage (III/2)	2.5 kV
Rated surge voltage (II/2)	2.5 kV
Rated voltage (III/3)	32 V 32 V
Rated voltage (III/2)	160 V
Rated voltage (II/2)	160 V
Connection in acc. with standard	EN-VDE
Nominal current I_N	6 A
Insulating material	LCP
Flammability rating according to UL 94	V0
Color	black
Number of positions	15

Standards and Regulations


Connection in acc. with standard	EN-VDE
Flammability rating according to UL 94	V0

Environmental Product Compliance


China RoHS	Environmentally friendly use period: unlimited = EFUP-e
	No hazardous substances above threshold values

Drawings

Drilling diagram




Dimensional drawing

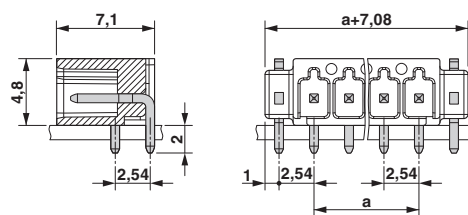

Printed-circuit board connector - MC 0,5/15-G-2,54 P20 THR R56 - 1821371

Diagram

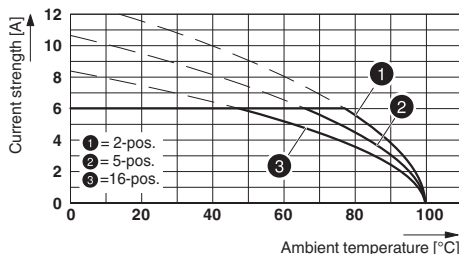

Type: FMC 0,5/...-ST-2,54 with MC 0,5/...-G-2,54 P20 THR R..

Approvals

Approvals

Approvals

cULus Recognized / VDE Gutachten mit Fertigungsüberwachung / IEC60335-1 / EAC

Ex Approvals

Approval details

cULus Recognized		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E60425-19920306
	B	C	
Nominal current I _N	6 A	6 A	
Nominal voltage U _N	150 V	50 V	

VDE Gutachten mit Fertigungsüberwachung		http://www.vde.com/en/Institute/OnlineService/VDE-approved-products/Pages/Online-Search.aspx	40042258
Nominal current I _N	6 A		
Nominal voltage U _N	160 V		

IECEE CB Scheme		http://www.iecee.org/	DE1-55663-B1
Nominal current I _N	6 A		

Printed-circuit board connector - MC 0,5/15-G-2,54 P20 THR R56 - 1821371

Approvals

Nominal voltage UN	160 V
--------------------	-------

EAC		B.01742
-----	---	---------