




Power Double Lock

TE Internal #: 177903-6
Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 9
Position, .156 in [3.96 mm] Centerline, Wire & Cable, UL 94V-0,
Power Double Lock

[View on TE.com >](#)

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Plug

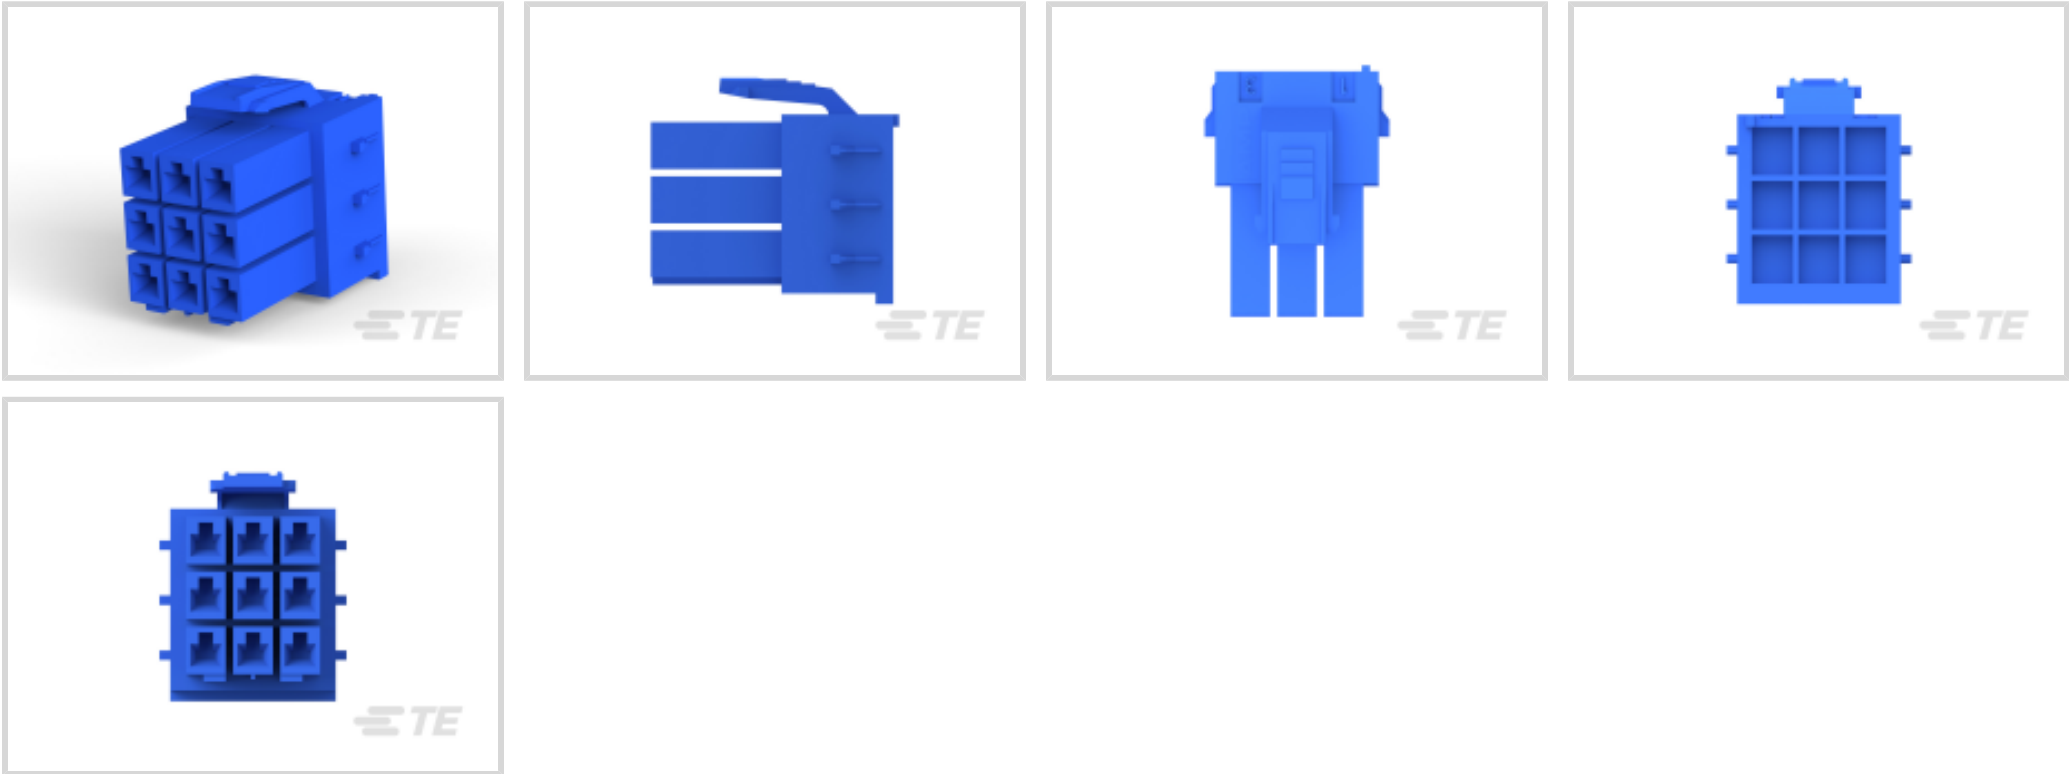

Rectangular Power Connector Type: **Housing**
Connector & Housing Type: **Plug**
Connector System: **Wire-to-Wire**
Number of Positions: **9**
Centerline (Pitch): **3.96 mm [.156 in]**

[All STD Temp Power Double Lock Plug \(68\)](#)

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	9
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	3

Electrical Characteristics

Operating Voltage	300 VAC
-------------------	---------



Contact Features

Contact Layout	Matrix
Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
Wire/Cable Type	Discrete Wire
Wire Type	Stranded

Mechanical Attachment

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Blue
Housing Material	Nylon 6/6

Dimensions

Row-to-Row Spacing	4.6 mm[.181 in]
Height	13.8 mm
Accepts Wire Insulation Diameter Range	3.1 mm
Width	15.2 mm
	.031 – .078 in
Length	20.6 mm

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
VDE Tested	Yes
Agency/Standard	CSA, UL

Packaging Features

Packaging Method	Bag
------------------	-----



Packaging Quantity	150
Other	
For Use With	Cap: 179467, Contacts: 177914 or 177915, Double Lock Plate

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) ‘Guidance on requirements for substances in articles’ posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-P87024-R2435
Power Double Lock Receptacle

TE Part # 179593-1
AMP POWER D/LOCK RECCONT. L/P

TE Part # 179592-2
POWER D/LOCK REC CONT. H/P L/P

TE Part # 177911-6
POWER DBL LOCK CAP HSG P/M 9P

TE Part # 179592-1
AMP POWER D/LOCK REC CONT. L/P

TE Part # 179593-2
POWER D/LOCK REC CONT. H/P L/P

Also in the Series | Power Double Lock

Connector Contacts(1)

Insertion & Extraction Tools(2)

Power Contacts(23)

Rectangular Connector Locking(14)

Rectangular Power Connectors(284)

Customers Also Bought

TE Part #179592-2
POWER D/LOCK REC CONT. H/P L/P

TE Part #177898-6
POWER DBL LOCK PLUG HSG 2P

TE Part #179594-1
AMP POWER D/LOCK TAB CONT. L/P

TE Part #177909-4
POWER DBL LOCK CAP HSG P/M 6P



TE Part #91567-1
CCII POWER DBL LOCK S REC TAB
26-22 ASSY

TE Part #179593-2
POWER D/LOCK REC CONT. H/P L/P

TE Part #234912-1
EXT TOOL FOR POWER DBL LOK REC

TE Part #234914-1
EXT TOOL FOR POWER DBL LOK TAB

TE Part #91569-1
CCII POWER DBL LOCK L REC TAB 20-
16 ASSY

TE Part #177907-4
POWER DBL LOCK CAP HSG P/M 3P

Documents

Product Drawings

POWER DBL LOCK PLUG HSG 9P

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_177903-6_P.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_177903-6_P.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_177903-6_P.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_177903-6_E.3d_igs.zip

English

Customer View Model

ENG_CVM_177903-6_E.3d_stp.zip

English

Customer View Model

ENG_CVM_177903-6_E.2d_dxf.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages
[SOFT_SHELL_PIN_AND_SOCKET_CONNECTORS_CATALOG](#)
English

Product Specifications
[Product Specification](#)
English

Instruction Sheets
[Instruction Sheet \(non U.S.\)](#)
English
[AMP POWER DOUBLELOCK CONNECTOR SERIES](#)
English

Agency Approvals
[UL Report](#)
English