

1801174-2 ✓ ACTIVE

Sensor Flat Contact System

TE Internal #: 1801174-2

Housing for Male Terminals, Wire-to-Wire, 2 Position, .131 in [3.33 mm] Centerline, Sealable, Blue, Signal, Sensor Flat Contact System

[View on TE.com >](#)



Connectors > Automotive Connectors > Connector Housings



Connector & Housing Type: **Housing for Male Terminals**

Mating Tab Width: .64 mm, 1.5 mm [.025 in, .059 in]

Connector System: **Wire-to-Wire**

Number of Positions: 2

Centerline (Pitch): 3.33 mm [.131 in]

Features

Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Male Terminals
Connector System	Wire-to-Wire
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	16 VDC
Nominal Voltage Architecture	12 V

Body Features

Cable Exit Angle	180°
------------------	------



Body Material	PBT GF
---------------	--------

Primary Product Color	Blue
-----------------------	------

Connector Code	2
----------------	---

Contact Features

Contact Size	1.5mm
--------------	-------

Contact Type	Tab
--------------	-----

Mating Tab Width	.64 mm, 1.5 mm [.025 in][.059 in]
------------------	-----------------------------------

Mechanical Attachment

Mounting Feature	Without
------------------	---------

Terminal Position Assurance	Yes
-----------------------------	-----

Strain Relief	Add By Accessory
---------------	------------------

Mating Alignment Type	Keyed
-----------------------	-------

Mating Alignment	With
------------------	------

Connector Mounting Type	Cable Mount (Free-Hanging)
-------------------------	----------------------------

Housing Features

Centerline (Pitch)	3.33 mm [.131 in]
--------------------	-------------------

Dimensions

Product Width	55.8 mm [2.197 in]
---------------	--------------------

Product Length	17.4 mm [.685 in]
----------------	-------------------

Product Height	17.6 mm [.693 in]
----------------	-------------------

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C, 125 °C, 130 °C, 140 °C, 145 °C, 150 °C [158 °F][167 °F][176 °F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F][257 °F][266 °F][284 °F][293 °F][302 °F]
-----------------------------	--

Operating Temperature Range	-40 – 150 °C [-40 – 302 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Industry Standards

Degree of Protection	IP69K
----------------------	-------

UL Flammability Rating	UL 94HB
------------------------	---------

Other



Serviceable	Yes
Connector Position Assurance Capable	No

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # CAT-AM706-T273
AMP MCP, SFC, RECEPTACLE



TE Part # 1801155-5
COVER FOR 2W HP CONNECTOR



TE Part # 1-1579008-3
EXTRACTION TOOL



TE Part # 1-1579008-1
EXTRACTION TOOL SECONDARY LOCK OPENING




TE Part # 1-1579008-4
EXTRACTION TOOL, 2POS.
SECONDARY LOCK CL.



TE Part # 1-1801155-5
COVER FOR 2W HP CONNECTOR



TE Part # 1-1801175-2
2W RECEPTACLE HP CONNECTOR
BLUE



TE Part # 1-1801175-9
2W RECEPTACLE HP CONNECTOR
ORANGE



TE Part # 1-1801356-1
ROTATIVE COVER, RIGHT ANGLE,
2W HP CONN



TE Part # 1-1801466-1
COVER, FIXED, 2 WAY HP
CONNECTOR



TE Part # 1-1801466-2
COVER, FIXED, 2 WAY HP
CONNECTOR



TE Part # 1-1823174-4
2POS, 1.5MM SFC, REC HSG ASSY, SLD



TE Part # 1-1823174-5
2POS, 1.5MM SFC, REC HSG ASSY, SLD



TE Part # 1-1823174-8
2POS, 1.5MM SFC, REC HSG ASSY, SLD



TE Part # 1801175-2
2W RECEPTACLE HP CONNECTOR
BLUE



TE Part # 1801176-2
2W RECEPTACLE HP SL CONNECTOR
BLUE



TE Part # 1801176-8
2W RECEPTACLE HP SL CONNECTOR
RED



TE Part # 1801356-1
ROTATIVE COVER, RIGHT ANGLE,
2W HP CONN




TE Part # 1801466-1
COVER, FIXED, 2 WAY HP
CONNECTOR




TE Part # 1801466-2
COVER, FIXED, 2 WAY HP
CONNECTOR


Also in the Series | **Sensor Flat Contact System**




Automotive Connector Caps & Covers
(12)



Automotive Housings(56)

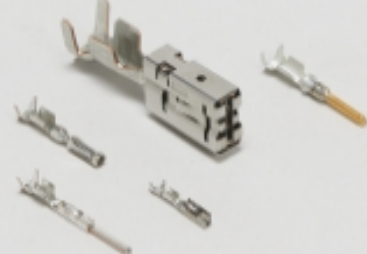

Automotive Terminals(23)



Insertion & Extraction Tools(7)

Customers Also Bought



TE Part #1-1718562-1
REC. HSG., 4 POSN., RAD. SEAL, AMP
MCP2.8K



TE Part #881757-1
2P JR TIMER ASS'Y



TE Part #1-1801175-1
2W RECEPTACLE HP CONNECTOR
BLACK



TE Part #1-1801175-2
2W RECEPTACLE HP CONNECTOR
BLUE



TE Part #1544978-2
RECEPT HSG ASSY, 8MM NG1+, 2W,
SEALED




TE Part #1801176-5
2W RECEPTACLE HPSL CONNECTOR
GREEN




TE Part #CD41663001
ACW0219-1.00-60(NS)



TE Part #1544221-1
COSSE DE PUISSANCE



TE Part #1-1904107-6
V23136B0001X109-EV-CBOX



TE Part #5-1904107-9
V23136J0004X105-EV-CBOX

Documents

Product Drawings

[2W TAB HP CONNECTOR BLUE](#)

English

CAD Files

Customer View Model

[ENG_CVM_CVM_1801174-2_B.2d_dxf.zip](#)

English

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_1801174-2_B.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_1801174-2_B.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

1801174-2

Housing for Male Terminals, Wire-to-Wire, 2 Position, .131 in [3.33 mm] Centerline,
Sealable, Blue, Signal, Sensor Flat Contact System



Product Specification

English