# 177901-6 - ACTIVE


### Power Double Lock

TE Internal #: 177901-6 Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 6 Position, .156 in [3.96 mm] Centerline, Wire & Cable, UL 94V-0, Power Double Lock

#### View on TE.com >



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors > STD Temp Power Double Lock Plug

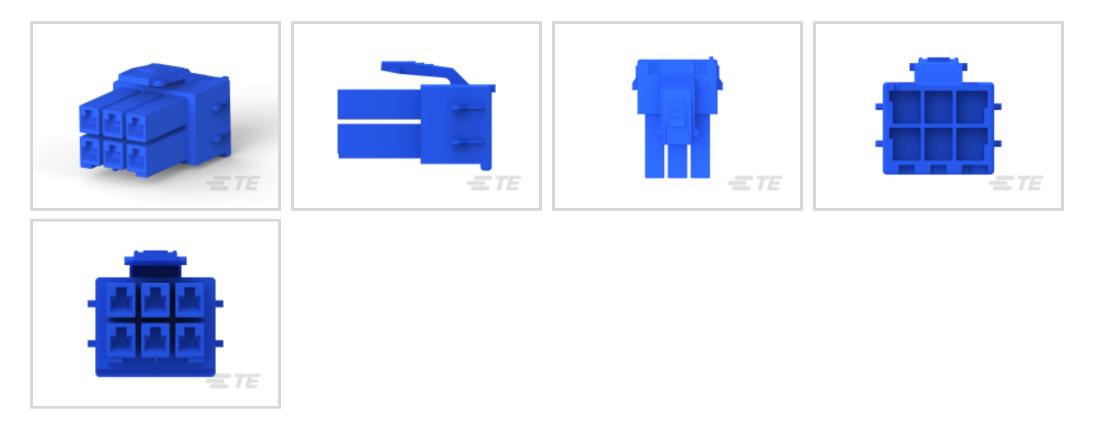

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 6

Centerline (Pitch): 3.96 mm [.156 in ]

#### All STD Temp Power Double Lock Plug (68)

# Features

### **Product Type Features**

| Rectangular Power Connector Type  | Housing      |
|-----------------------------------|--------------|
| Connector & Housing Type          | Plug         |
| Connector System                  | Wire-to-Wire |
| Sealable                          | No           |
| Connector & Contact Terminates To | Wire & Cable |
| Configuration Features            |              |
| Number of Positions               | 6            |
| Number of Power Positions         | 0            |
| Number of Signal Positions        | 0            |
| Number of Rows                    | 2            |
| Electrical Characteristics        |              |
| Operating Voltage                 | 300 VAC      |

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 6 Position, .156 in [3.96 mm] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



### **Contact Features**

| Contact Layout                     | Matrix                     |  |
|------------------------------------|----------------------------|--|
| Contact Retention Within Housing   | Without                    |  |
| Contact Type                       | Receptacle                 |  |
| Termination Features               |                            |  |
| Termination Method to Wire & Cable | Crimp                      |  |
| Wire/Cable Type                    | Discrete Wire              |  |
| Wire Type                          | Stranded                   |  |
| Mechanical Attachment              |                            |  |
| Connector Mounting Type            | Cable Mount (Free-Hanging) |  |
| Housing Features                   |                            |  |
| Centerline (Pitch)                 | 3.96 mm[.156 in]           |  |
| Housing Color                      | Blue                       |  |
| Housing Material                   | Nylon 6/6                  |  |
| Dimensions                         |                            |  |
| Row-to-Row Spacing                 | 4.6 mm[.181 in]            |  |

# Usage Conditions

| Operating Temperature Range | -30 – 105 °C[-22 – 221 °F]  |  |
|-----------------------------|---|--|
| Operation/Application       |   |  |
| Circuit Application         | Power & Signal  |  |
| Industry Standards          |   |  |
| UL Flammability Rating      | UL 94V-0  |  |
| Glow Wire Rating            | Standard Part - Not Glow Wire   |  |
| Agency/Standard Number      | UL 1977   |  |
| Agency/Standard             | UL  |  |
| Packaging Features          |   |  |
| Packaging Method            | Bag   |  |
| Packaging Quantity          | 200   |  |
| Other                       |   |  |
| For Use With                | Cap: 177909 or 179466, Contacts: 177916<br>or 177917, Double Lock Plate 177919-1,<br>Header: 179841 |  |

Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 6 Position, .156 in [3.96 mm] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



# **Product Compliance**

For compliance documentation, visit the product page on TE.com>

| EU RoHS Directive 2011/65/EU                  | Compliant  |  |
|---|--|--|
| EU ELV Directive 2000/53/EC                   | Compliant  |  |
| China RoHS 2 Directive MIIT Order No 32, 2016 | No Restricted Materials Above Threshold  |  |
| EU REACH Regulation (EC) No. 1907/2006        | Current ECHA Candidate List: JUNE 2022<br>(224)<br>Candidate List Declared Against: JAN 2022<br>(223)<br>SVHC > Threshold:<br>Not Yet Reviewed |  |
| Halogen Content                               | Low Halogen - Br, Cl, F, I < 900 ppm per<br>homogenous material. Also BFR/CFR/PVC<br>Free  |  |
| Solder Process Capability                     | Not applicable for solder process capability   |  |

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**




Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 6 Position, .156 in [3.96 mm] Centerline, Wire & Cable, UL 94V-0, Power Double Lock






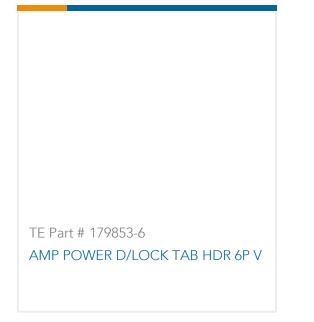

# Also in the Series | Power Double Lock

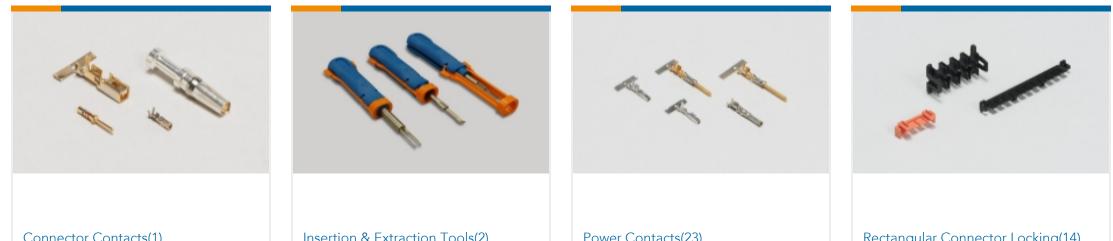

| Connector Contacts(1) | Insertion & Extraction Tools(2) | Power Contacts(23) | Rectangular Connector Locking(14) |
|-----------------------|---------------------------------|--------------------|-----------------------------------|
|                       |                                 |                    |                                   |
|                       |                                 |                    |                                   |
|                       |                                 |                    |                                   |
|                       |                                 |                    |                                   |
|                       |                                 |                    |                                   |

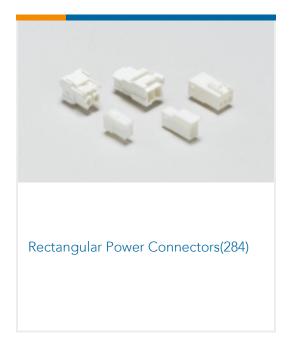

# Customers Also Bought



Rectangular Power Connectors, Housing, Plug, Wire-to-Wire, 6 Position, .156 in [3.96 mm] Centerline, Wire & Cable, UL 94V-0, Power Double Lock



# Documents

**Product Drawings** POWER DBL LOCK PLUG HSG 6P

English

## **CAD** Files

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_177901-6\_S.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_177901-6\_S.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_177901-6\_S.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages SOFT\_SHELL\_PIN\_AND\_SOCKET\_CONNECTORS\_CATALOG

English

**Product Specifications** 

Product Specification

English

# **Product Environmental Compliance**

**Product Compliance** 

English

Product Compliance

English

**Instruction Sheets** 

Instruction Sheet (non U.S.)

English

AMP POWER DOUBLELOCK CONNECTOR SERIES

English

Agency Approvals

**UL Report** 

English