
1827684-2 - ACTIVE

TE Internal #: 1827684-2 DC Jack Connectors, Board-to-Board, 7 Position, 2 mm [.079 in] Centerline, Receptacle, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal

View on TE.com >



Connectors > PCB Connectors > Battery Connectors & Holders > DC Jack Connectors

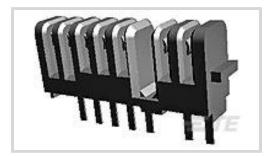

Connector System: Board-to-Board

Number of Positions: 7

Centerline (Pitch): 2 mm [.079 in]

Connector & Housing Type: Receptacle

Operating Voltage: **30 VDC**

Features

Product Type Features

Connector System	Board-to-Board
Connector & Housing Type	Receptacle
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board

Configuration Features

Number of Positions	7
PCB Mount Orientation	Right Angle
Electrical Characteristics	
Operating Voltage	30 VDC
Contact Features	
Contact Current Rating (Max)	6 A
Mechanical Attachment	
PCB Mount Retention	Without
Connector Mounting Type	Board Mount
Housing Features	
Centerline (Pitch)	2 mm[.079 in]
Usage Conditions	
Operating Temperature Range	-20 – 80 °C[-4 – 176 °F]

1827684-2

DC Jack Connectors, Board-to-Board, 7 Position, 2 mm [.079 in] Centerline, Receptacle, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal



Circuit Application	Power & Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 202 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Reflow solder capable to 245°C

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Customers Also Bought

1827684-2

DC Jack Connectors, Board-to-Board, 7 Position, 2 mm [.079 in] Centerline, Receptacle, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal



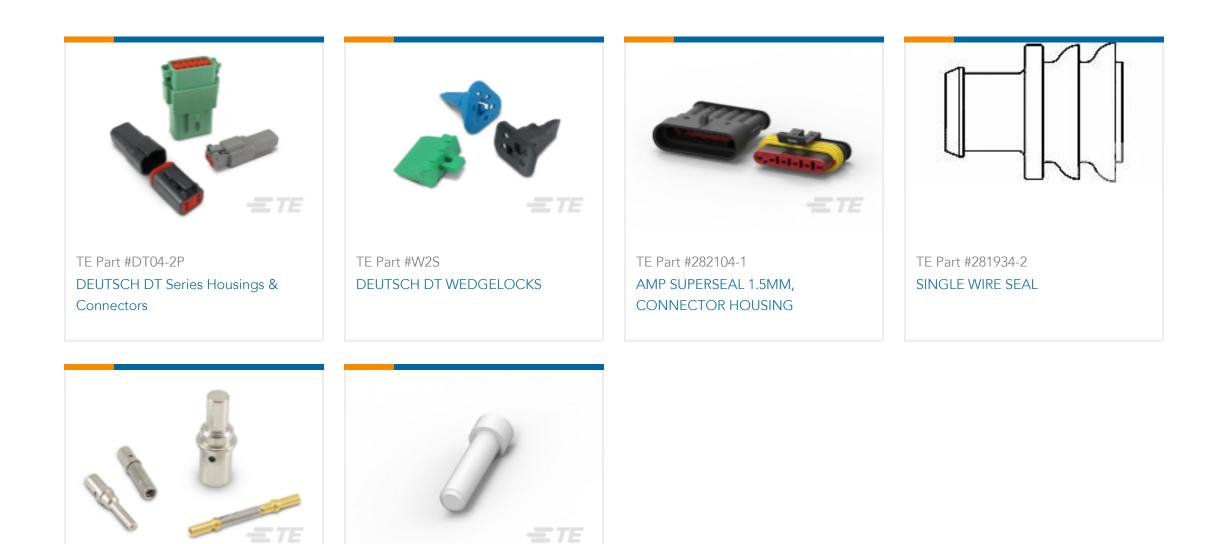

Documents

TE Part #0460-202-16141

DEUTSCH SOLID CONTACTS

Product Drawings 2mm pitch Battery Rec. Assy. 7Pos. H=4.0

TE Part #114017-ZZ

SEALING PLUG, SIZE 12/16, WHT

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_1827684-2_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1827684-2_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1827684-2_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 2_PIECE_POWER_CONNECTORS_qrg_4-1773458-1

English

Product Specifications

Product Specification

English

Product Environmental Compliance MD_1827684-2_102420161531_dmtec

1827684-2

DC Jack Connectors, Board-to-Board, 7 Position, 2 mm [.079 in] Centerline, Receptacle, 30 VDC, Right Angle, Printed Circuit Board, Power & Signal



English

MD_1827684-2_102420161531_dmtec

English