
# 178964-4 - ACTIVE

## Dynamic Series | Dynamic 3000 Series

TE Internal #: 178964-4 Housing, Housing for Male Terminals, Wire-to-Wire, 8 Position, 3.81 mm [.15 in] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series

#### View on TE.com >

#### Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >

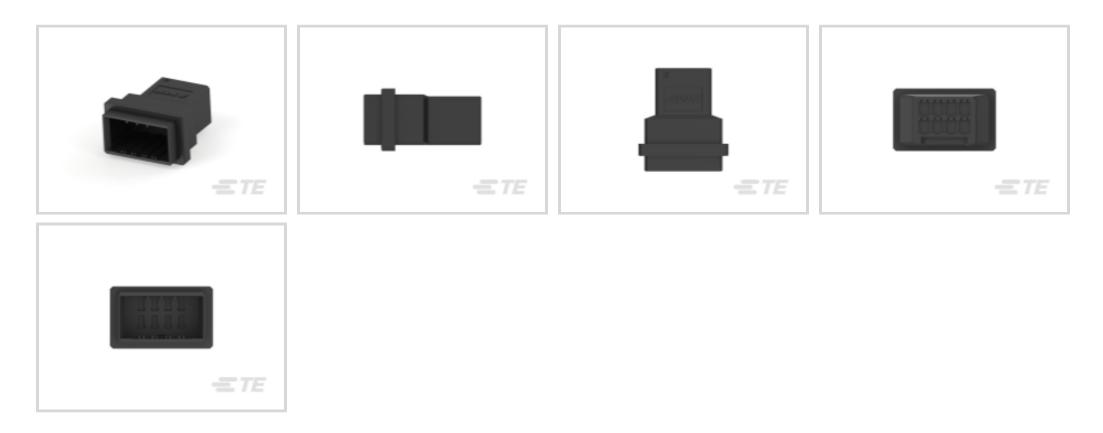

Receptacle and Tab Housing: 3.81 mm pitch, 250V

Connector Product Type: Housing

Connector & Housing Type: Housing for Male Terminals

Connector System: Wire-to-Wire

Number of Positions: 8

Centerline (Pitch): 3.81 mm [.15 in]

All Receptacle and Tab Housing: 3.81 mm pitch, 250V (45)



### Features

### **Product Type Features**

Connector Product Type	Housing			
Connector & Housing Type	Housing for Male Terminals			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	8			
Number of Rows	2			
Termination Features				
Termination Method to Wire & Cable	Crimp			
Mechanical Attachment				

**C** For support call+1 800 522 6752

07/22/2022 05:11AM | Page 1

Housing, Housing for Male Terminals, Wire-to-Wire, 8 Position, 3.81 mm [.15 in] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series



Mating Retention	With	
Connector Mounting Type	Cable Mount (Free-Hanging)	
Housing Features		
Centerline (Pitch)	3.81 mm[.15 in]	
Housing Color	Black	
Dimensions		
Row-to-Row Spacing	5.08 mm[.2 in]	
Usage Conditions		
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]	
Operation/Application		
Circuit Application	Power & Signal	
Product Compliance		
For compliance documentation, visit the product page on TE.com>		
EU RoHS Directive 2011/65/EU	Compliant	

EU ELV Directive 2000/53/EC

China RoHS 2 Directive MIIT Order No 32, 2016

Compliant

No Restricted Materials Above Threshold

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Housing, Housing for Male Terminals, Wire-to-Wire, 8 Position, 3.81 mm [.15 in] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series




**Compatible Parts** 



# Also in the Series | Dynamic 3000 Series

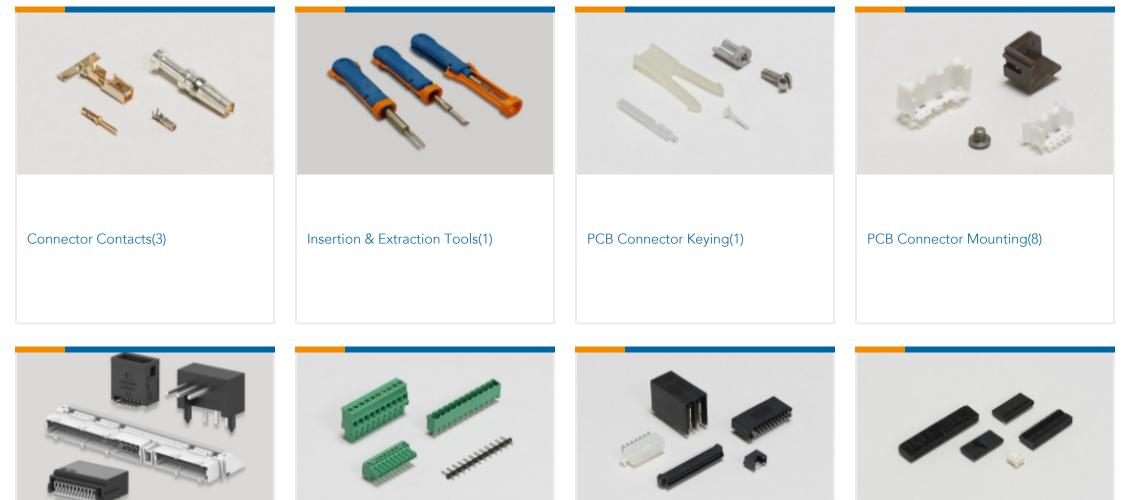


PCB Headers & Receptacles(283)	PCB Terminal Blocks(25)	Standard Rectangular Connectors(2)	Wire-to-Board Connector Assemblies & Housings(152)



# Customers Also Bought

Housing, Housing for Male Terminals, Wire-to-Wire, 8 Position, 3.81 mm [.15 in] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series



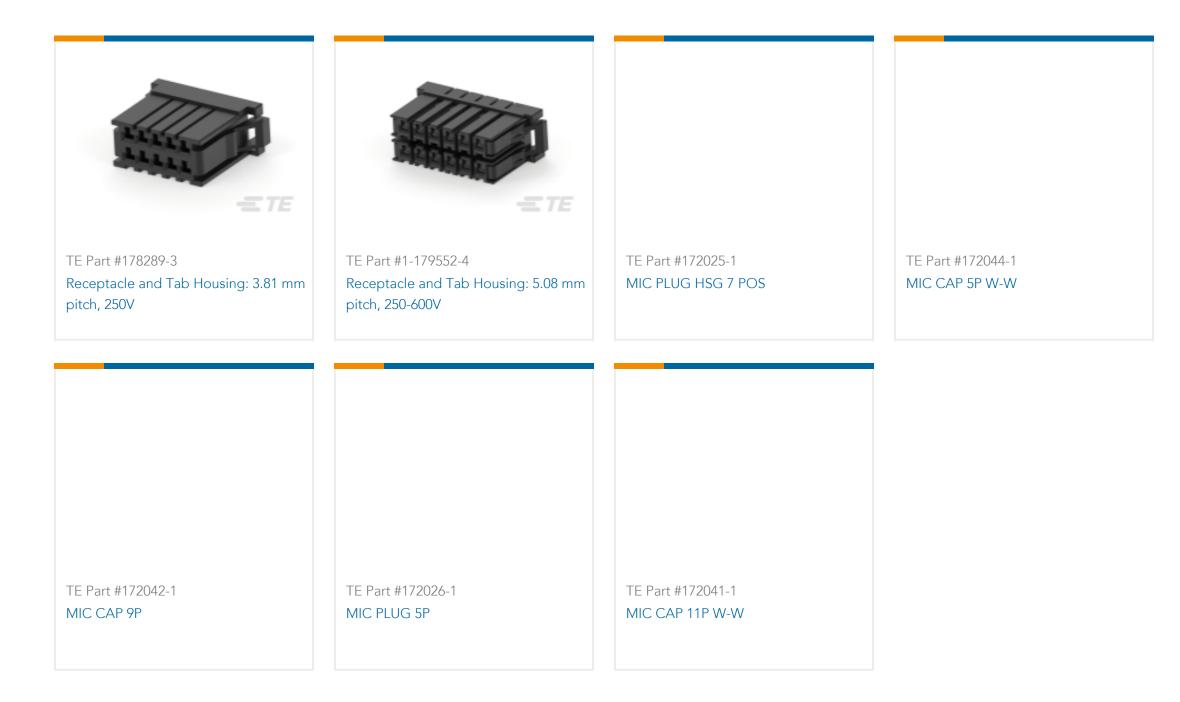

## Documents

**Product Drawings** DYNAMIC D-3100D TAB HSG 8P F/H

English

**CAD** Files **Customer View Model** ENG\_CVM\_CVM\_178964-4\_Y.2d\_dxf.zip

English

3D PDF

3D

**Customer View Model** 

ENG\_CVM\_CVM\_178964-4\_Y.3d\_igs.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_178964-4\_Y.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages 1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

Japanese

1-1773732-4\_DYNAMIC\_SERIES\_CATALOG\_ENGLISH

English

**Product Specifications** 

**Product Specification** 

English

Housing, Housing for Male Terminals, Wire-to-Wire, 8 Position, 3.81 mm [.15 in] Centerline, Crimp, 2 Row, Black, Mating Retention, Dynamic 3000 Series



Product Environmental Compliance

Product Compliance

English

**Product Compliance** 

English

Agency Approvals TUV Certificate

English