




Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

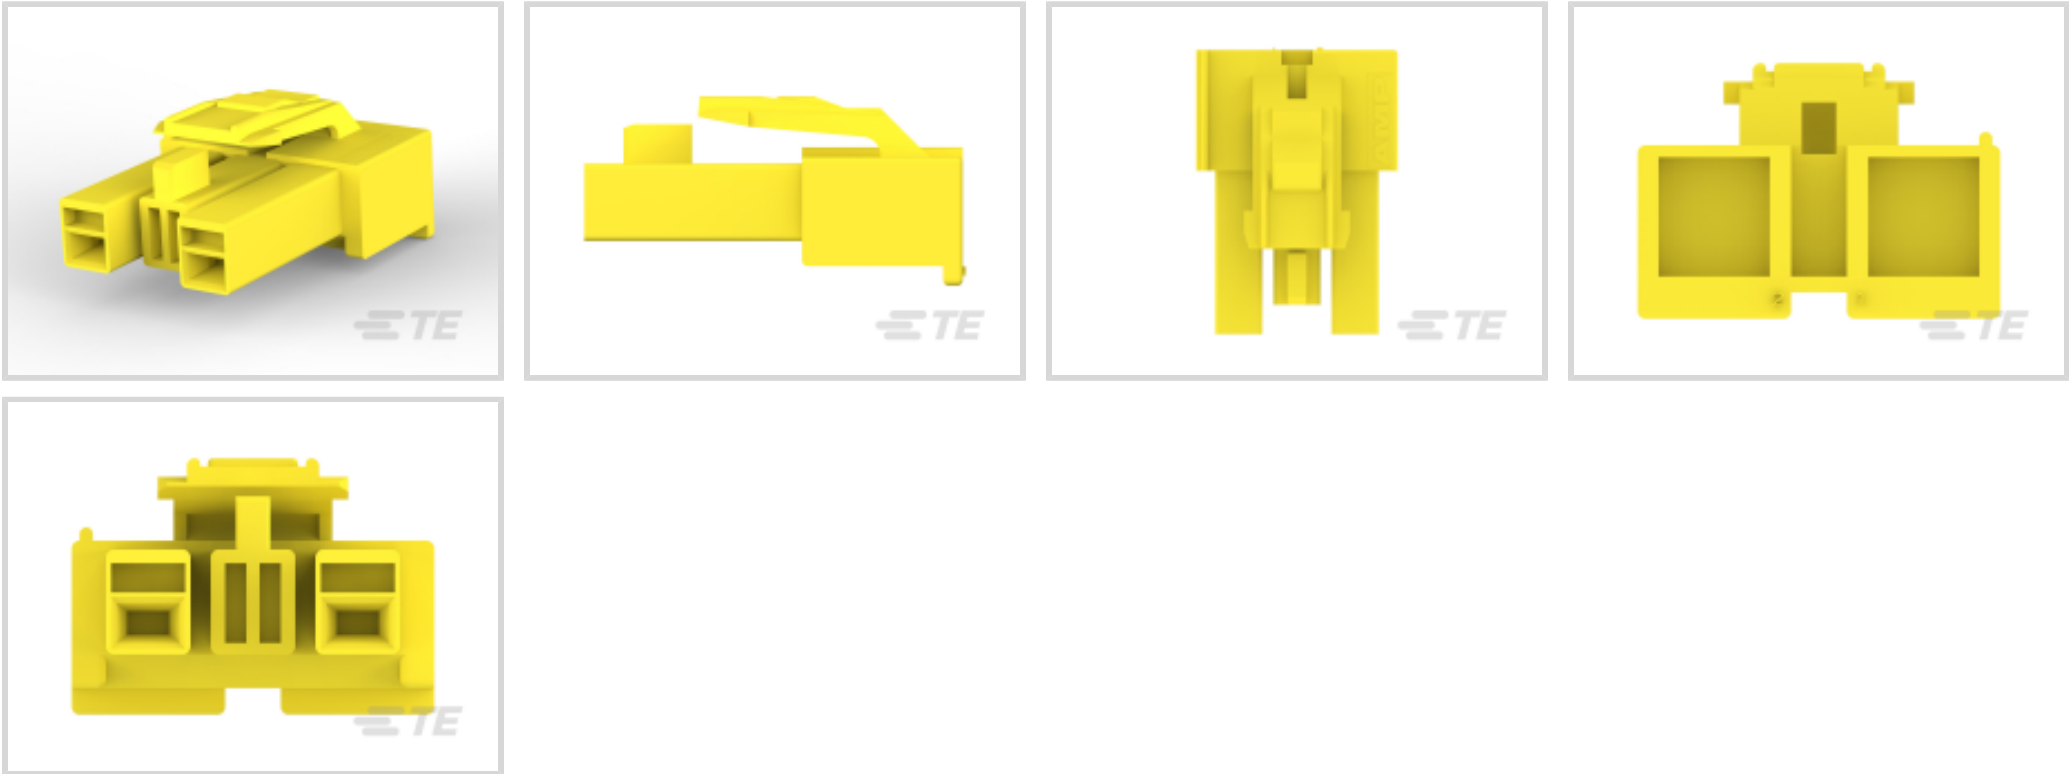

Rectangular Power Connector Type: **Housing**

Connector & Housing Type: **Plug**

Connector System: **Wire-to-Board, Wire-to-Wire**

Number of Positions: **2**

Centerline (Pitch): **7.92 mm [.312 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Board, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Power Positions	0
Number of Signal Positions	0
Number of Rows	1

Electrical Characteristics

Operating Voltage	300 VAC
Insulation Resistance	1000 MΩ

Contact Features



Contact Layout	Inline
Contact Base Material	Copper Alloy
Contact Current Rating (Max)	7 A
Contact Retention Within Housing	Without
Contact Type	Receptacle

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
Panel Mount Feature	Without
PCB Mount Retention	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Mating Retention	With
Mating Retention Type	Latch

Housing Features

Centerline (Pitch)	7.92 mm[.312 in]
Housing Color	Yellow
Housing Material	Nylon 6/6

Dimensions

Height	7 mm[.28 in]
Length	19.3 mm[.76 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

--	--



Packaging Method	Bag
Packaging Quantity	1000

Other

For Use With	Header Assembly
--------------	-----------------

Product Compliance

For compliance documentation, visit the product page on TE.com>



EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

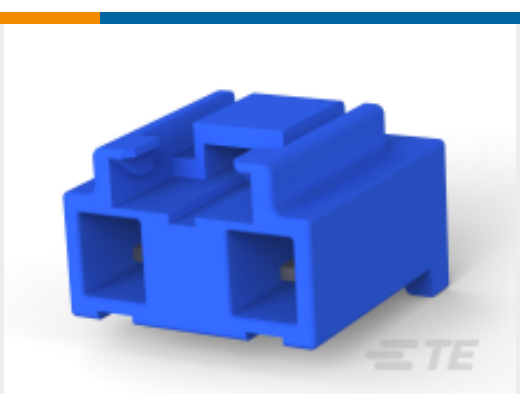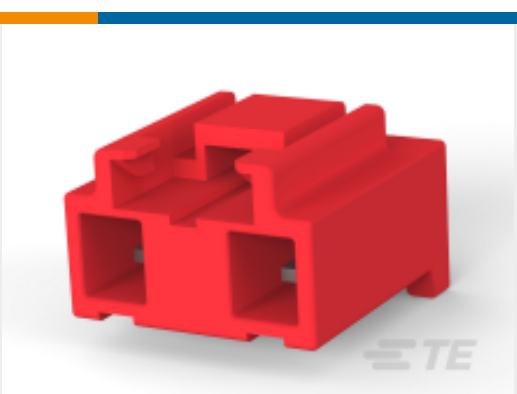

 TE Part # 175156-2 U/P REC CONT L/P	 TE Part # 176976-1 AMP UNIVERSAL POWER PLG 3C PCB	 TE Part # 175155-1 UNIV POWER REC CONT L/P	 TE Part # 2-178496-1 UNIV. POWER HDR H ASSY 2P NAT.
 TE Part # 175151-1 AMP UNIVERSAL POWER REC CONT.	 TE Part # 175152-1 UNIVERSAL POWER REC	 TE Part # 175152-2 AMP UNIVE. POWER CONN REC CONT	 TE Part # 175151-2 AMP UNIVE. POWER CONN REC CONT
 TE Part # 175155-2 U/P REC CONT L/P	 TE Part # 175156-1 UNIV POWER REC CONT L/P	 TE Part # 6-176976-1 AMP UNIVERSAL POWER PLG 2C PCB	 TE Part # 3-176976-1 AMP UNIVERSAL POWER PLG 2C PCB
 TE Part # 176976-4 UNIV POWER HDR ASSY 3P YELLOW	 TE Part # 2-178496-4 UNIV. POWER HDR H ASSY 2P YEL.	 TE Part # 3-176976-6 UNIV POWER HDR ASSY 3P BLUE	 TE Part # 3-176976-2 UNIV POWER HDR ASSY 3P RED
 TE Part # 3-176976-4 UNIV. POWER HDR ASSY 3P	 TE Part # 175151-5 AMP UNIVERSAL POWER CONN. REC C	 TE Part # 3-176976-9 UNIV POWER HDR ASSY 3P BLACK	 TE Part # 175151-4 UNIVESAL POWER REC CONT #26-22

Also in the Series | AMP Universal Power



Connector Contacts(1)

Insertion & Extraction Tools(1)

Power Contacts(21)

Rectangular Power Connectors(177)

Customers Also Bought

TE Part #178125-1
U/POWER PLUG HSG 2P 7.92M/M

TE Part #170262-2
EIS CONTACT

TE Part #175152-2
AMP UNIVE. POWER CONN REC CONT

TE Part #170183-2
250 FASTON,REC.,22-18 AWG,TPBR

TE Part #41802
250 FASTON FLAG REC 18-12 AWG TPBR

TE Part #178964-5
DYNAMIC D-3 W-T-W TAB HSG 10P

TE Part #1-1768045-7
STD SNAP-ON MARKERS

Documents

Product Drawings
U/POWER PLUG HSG 2P 7.29MM
English

CAD Files
Customer View Model
ENG_CVM_CVM_178125-4_G.2d_dxf.zip
English
3D PDF
3D
Customer View Model
ENG_CVM_CVM_178125-4_G.3d_igs.zip
English
Customer View Model
ENG_CVM_CVM_178125-4_G.3d_stp.zip
English

By downloading the CAD file I accept and agree to the Terms and Conditions of use.



Product Specifications

Crimping of Universal Power Contact

English

Product Specification

Japanese

AMP Universal Power Connector

Japanese

Product Environmental Compliance

MD_178125-4_120720171111_dmtec

English

MD_178125-4_120720171111_dmtec

English

Instruction Sheets

Extraction Tool for UP(913923-1)

English

Instruction Sheet (non U.S.)

English

AMP UNIVERSAL POWER CONNECTOR SERIES

English

Instruction Sheet (non U.S.)

English

Hand Tool, PN 914181-1, Universal Power Contact (Was IS-505J)

Japanese

Instruction Sheet (non U.S.)

English

Agency Approvals

UL Report

English