



Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors



Rectangular Power Connector Type: **Housing**
Connector & Housing Type: **Receptacle**
Connector System: **Wire-to-Panel, Wire-to-Wire**
Number of Positions: **2**
Centerline (Pitch): **3.96 mm [.156 in]**

Features

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Receptacle
Connector System	Wire-to-Panel, Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Configuration Features

Number of Positions	2
Number of Rows	1

Electrical Characteristics

Operating Voltage	300 VAC
Insulation Resistance	1000 MΩ

Contact Features

Contact Layout	Inline
Contact Base Material	Copper Alloy



Contact Current Rating (Max)	7 A
Contact Retention Within Housing	Without
Contact Type	Tab

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
Panel Mount Feature	With
PCB Mount Retention	Without
Connector Mounting Type	Panel Mount
Mating Retention	With
Mating Retention Type	Latch

Housing Features

Centerline (Pitch)	3.96 mm[.156 in]
Housing Color	Natural
Housing Material	Nylon 6/6

Dimensions

Height	8.9 mm[.35 in]
Length	29 mm[1.14 in]

Usage Conditions

Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Power & Signal
---------------------	----------------

Industry Standards

UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire

Packaging Features

Packaging Method	Bag
Packaging Quantity	1000



Other

For Use With	Plug Housing
--------------	--------------

Product Compliance


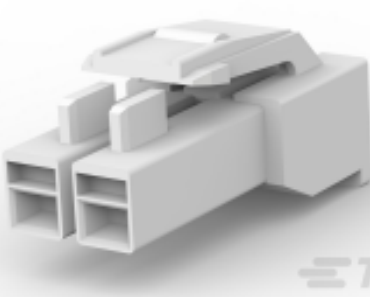

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

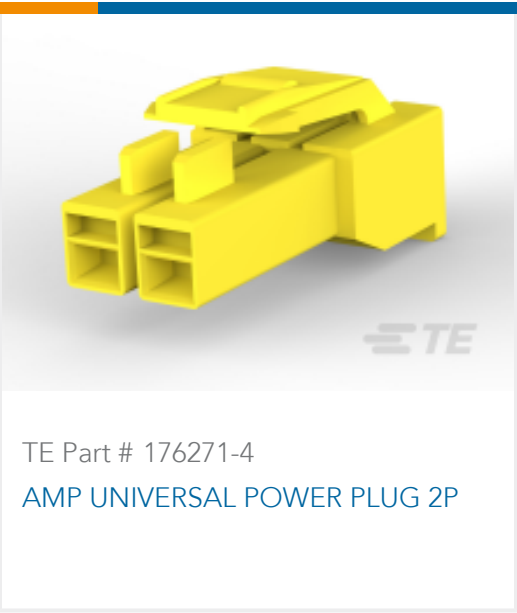
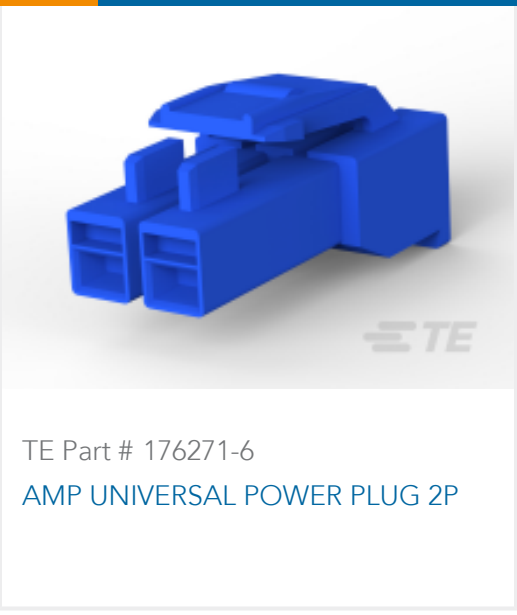
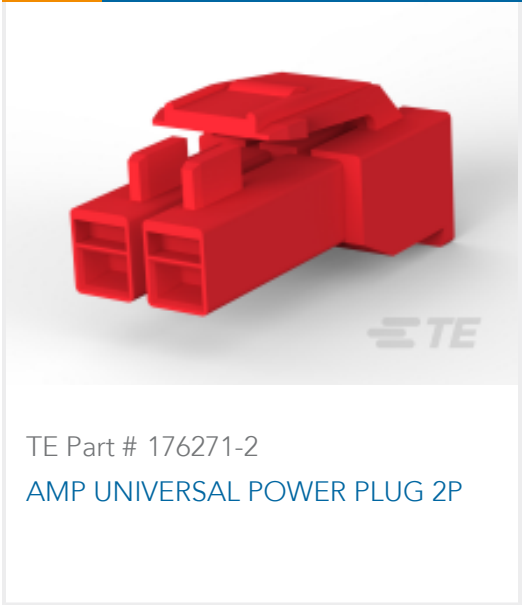
Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

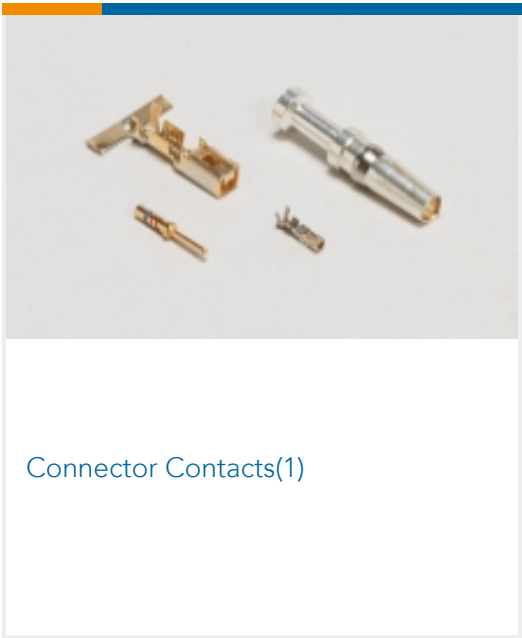
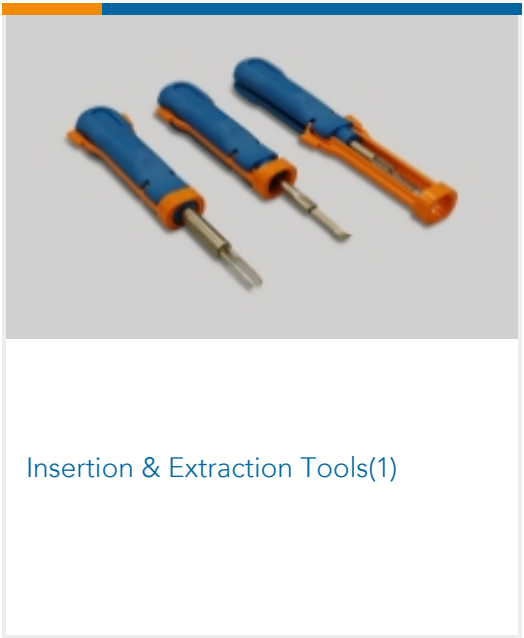
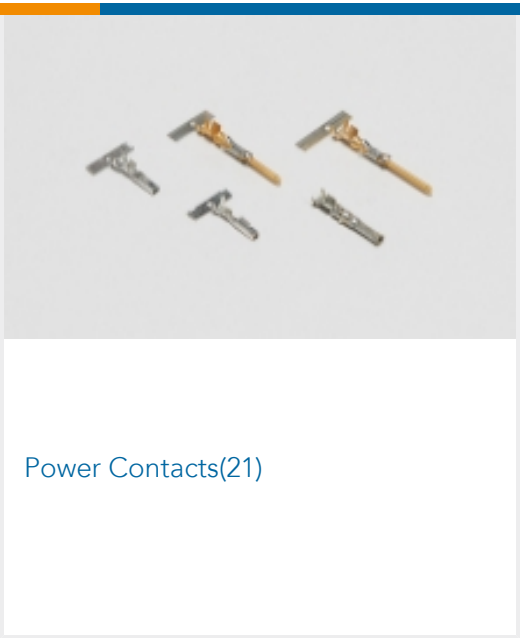
Compatible Parts

 TE Part # 175149-1 UNIVERSAL POWER CONN TAB	 TE Part # 176271-1 AMP UNIVERSAL POWER PLUG 2P	 TE Part # 175150-1 UNIVERSAL POWER CONN TAB	 TE Part # 175149-2 AMP UNIVE. POWER CONN TAB CONT
--	---	--	--

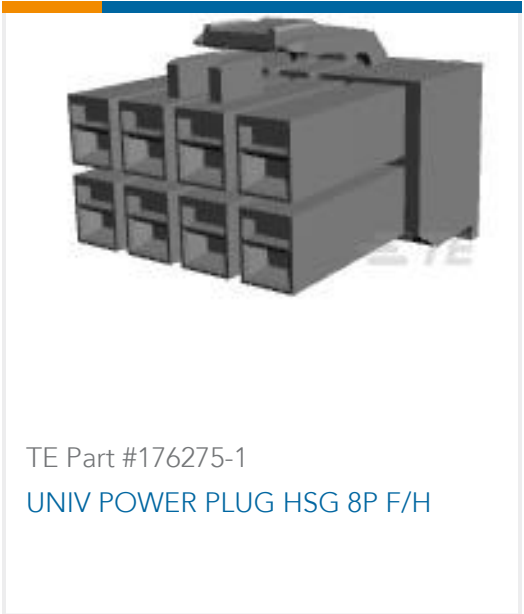


 TE Part # 175150-2 AMP UNIVE. POWER CONN TAB CONT	 TE Part # 175153-2 U/P TAB CONT L/P	 TE Part # 175154-1 UNIV POWER TAB CONT L/P	 TE Part # 176271-4 AMP UNIVERSAL POWER PLUG 2P
 TE Part # 176271-9 AMP UNIVERSAL POWER PLUG 2P	 TE Part # 175154-2 U/P TAB CONT L/P	 TE Part # 175153-1 UNIV POWER TAB CONT L/P	 TE Part # 176271-6 AMP UNIVERSAL POWER PLUG 2P
 TE Part # 176271-2 AMP UNIVERSAL POWER PLUG 2P	 TE Part # 175149-3 AMP UNIVERSAL POWER CONN.TAB C		

Also in the Series | AMP Universal Power

 Connector Contacts(1)	 Insertion & Extraction Tools(1)	 Power Contacts(21)	 Rectangular Power Connectors(177)
--	---	---	--

Customers Also Bought

 TE Part #176299-1 UNVI POWER CAP HSG 12P PNL MTG	 TE Part #176275-1 UNIV POWER PLUG HSG 8P F/H	 TE Part #176286-1 UNIV POWER CAP HSG 8P F/H	 TE Part #175150-1 UNIVERSAL POWER CONN TAB
---	--	--	---



TE Part #176297-1
UNIV POWER CAP HSG 9P P/MOUNT

TE Part #176296-1
UNIV POWER CAP HSG 8P PANEL MT

TE Part #176280-1
UNIV POWER PLUG HSG 18P F/H

TE Part #176278-1
UNIV POWER PLUG HSG 12P F/H

TE Part #176277-1
UNIV POWER PLUG HSG 10P F/H

Documents

Product Drawings

UNIV POWER CAP HSG 2P P/MOUNT

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_176292-1_G.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_176292-1_G.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_176292-1_G.3d_stp.zip

English

3D PDF

English

Customer View Model

ENG_CVM_176292-1_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_176292-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_176292-1_B.3d_stp.zip

English



By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Crimping of Universal Power Contact

English

Product Specification

Japanese

AMP Universal Power Connector

Japanese

Product Environmental Compliance

MD_176292-1_06062018810_dmtec

English

MD_176292-1_06062018810_dmtec

English

Instruction Sheets

AMP UNIVERSAL POWER CONNECTOR SERIES

English

Instruction Sheet (non U.S.)

English

Agency Approvals

UL Report

English