

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0191640075**
Status: **Active**
Description: Perma-Seal™ Male Quick Disconnect Tab for 10-12 AWG Wire, Tab Size 6.35mm (.250") x .81mm (.032")

Documents:

[Product Literature \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)
[Drawing \(PDF\)](#)

General

Product Family Quick Disconnects
 Series 19164
 Product Name Perma-Seal™
 Type Quick Disconnect

Physical

Barrel Type Closed
 Flammability 94V-0
 Gender Male
 Glow-Wire Compliant No
 Insulation NiAc™
 Lock to Mating Part None
 Material - Metal Brass
 Orientation Straight
 Packaging Type Bag
 Tab Thickness 0.81mm (.032")
 Tab Width 6.35mm (.250")
 Temperature Range - Operating -55°C to +125°C
 Wire Insulation Diameter 5.84mm (.230") max.
 Wire Size AWG 10, 12
 Wire Size mm² 4.00 - 6.00

Electrical


CSA LR18689
 UL E79133
 Voltage - Maximum 600V

Material Info

Old Part Number SC-9280

Reference - Drawing Numbers

Sales Drawing SD-19164-039

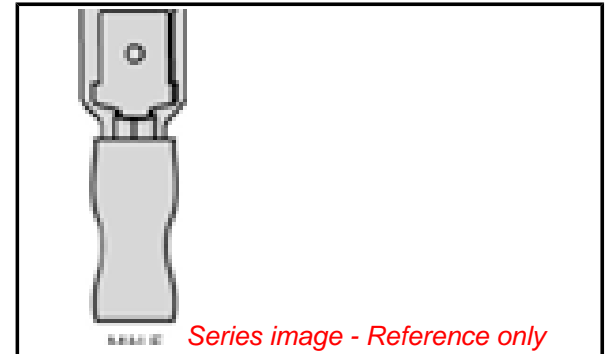

EU RoHS

ELV and RoHS Compliant
REACH SVHC
 Not Reviewed
Halogen-Free Status
Not Reviewed

China RoHS



Need more information on product environmental compliance?

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of Compliance, [click here](#)

Please visit the [Contact Us](#) section for any non-product compliance questions.

Search Parts in this Series

19164Series

Application Tooling | FAQ

Tooling specifications and manuals are found by selecting the products below. Crimp Height Specifications are then contained in the Application Tooling Specification document.

Global

Description	Product #
Hand Crimp Tool	0640016100