




Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Contacts

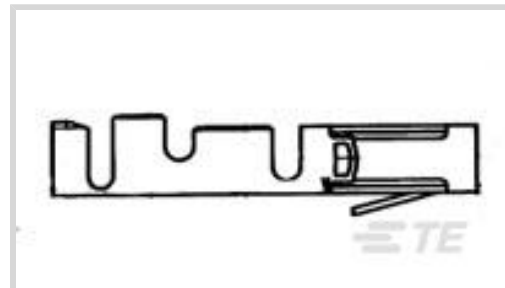

Contact Type: **Socket**

Connector System: **Wire-to-Board**

Wire Size: **.32 – .13 mm²**

Features

Product Type Features

Connector System	Wire-to-Board
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Termination Resistance	7 mΩ
Insulation Resistance	5000 MΩ
Dielectric Withstanding Voltage (Max)	750 V
Operating Voltage	40 VAC

Contact Features

Mating Square Post Dimension	.63 mm[.025 in]
Contact Retention Within Housing	With
Wire Contact Termination Area Plating Material	Gold Flash
Contact Mating Area Plating Material Thickness	.4 μm[15 μin]
Contact Base Material	Phosphor Bronze
Contact Type	Socket
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	3 A

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

--	--



Contact Retention Type Within Housing	Locking Lance
Wire Insulation Support	With
Connector Mounting Type	Cable Mount (Free-Hanging)

Dimensions

Accepts Wire Insulation Diameter Range	.9 – 1.55 mm [.035 – .061 in]
Wire Size	.32 – .13 mm ²

Usage Conditions

Operating Temperature Range	-40 – 80 °C [-40 – 176 °F]
-----------------------------	----------------------------

Operation/Application

Circuit Application	Signal
---------------------	--------

Packaging Features

Packaging Method	Reel
------------------	------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)


EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides











on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts

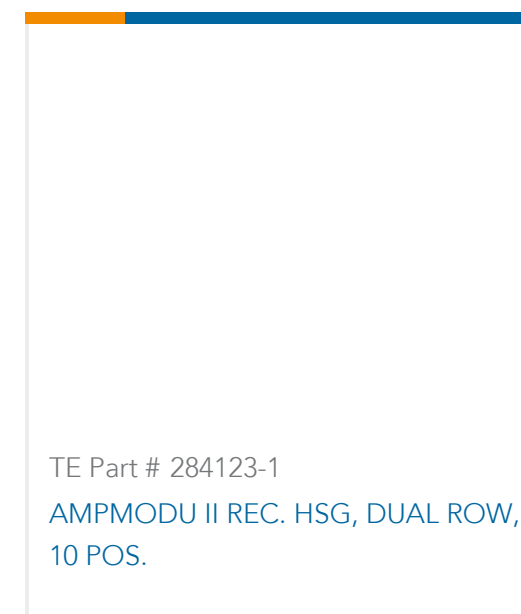

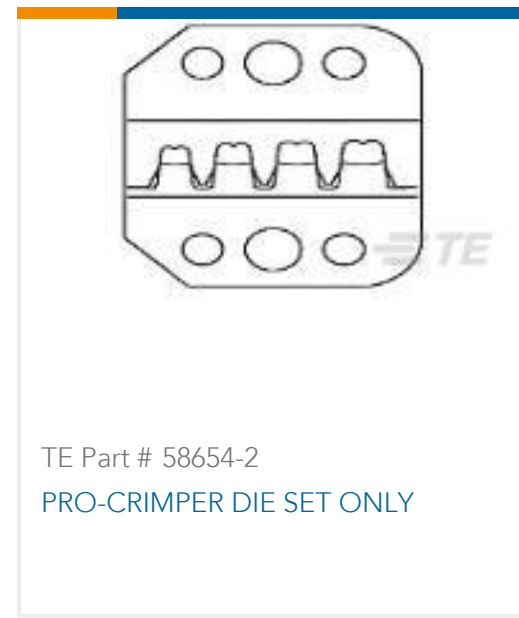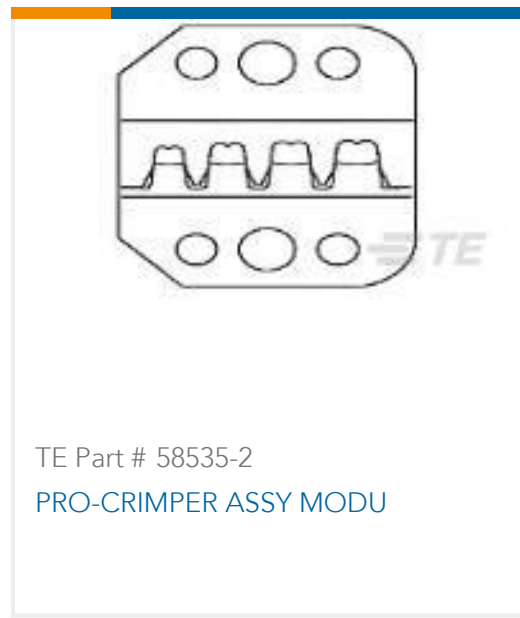

Also in the Series | AMPMODU IV/V

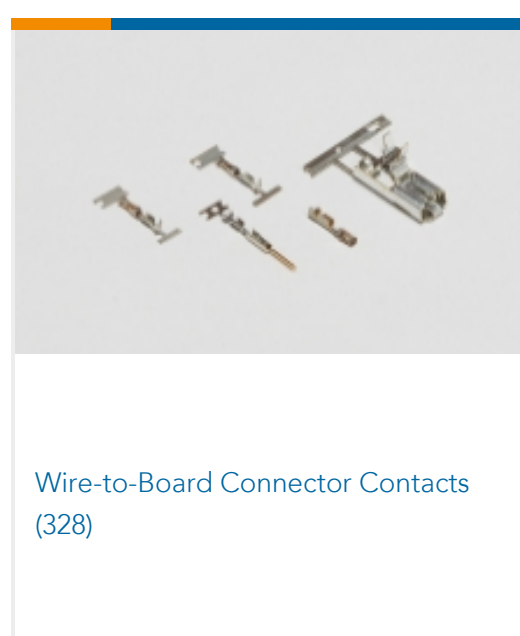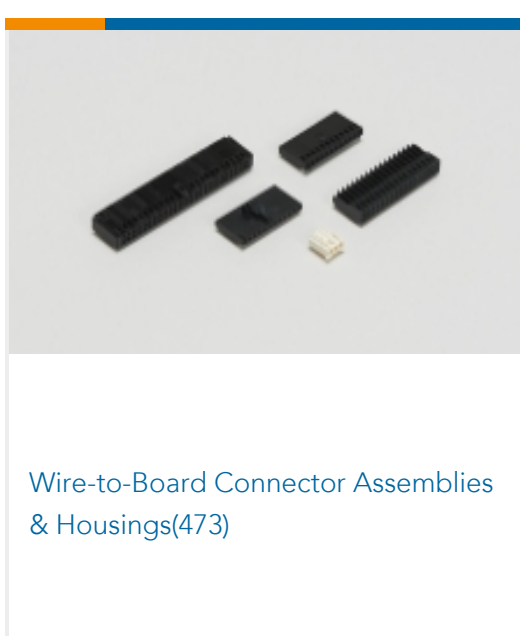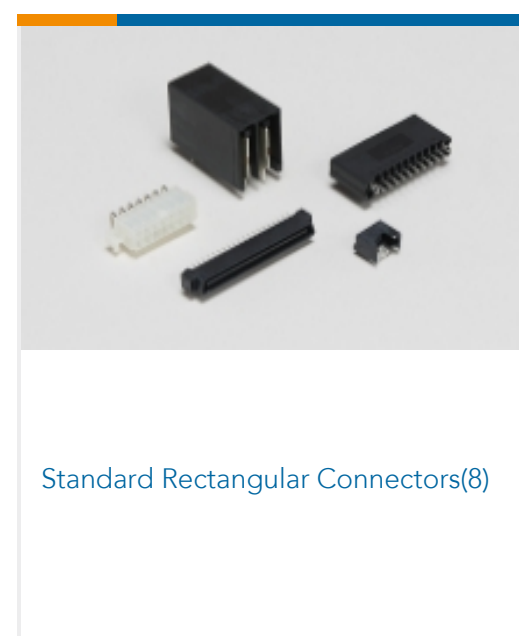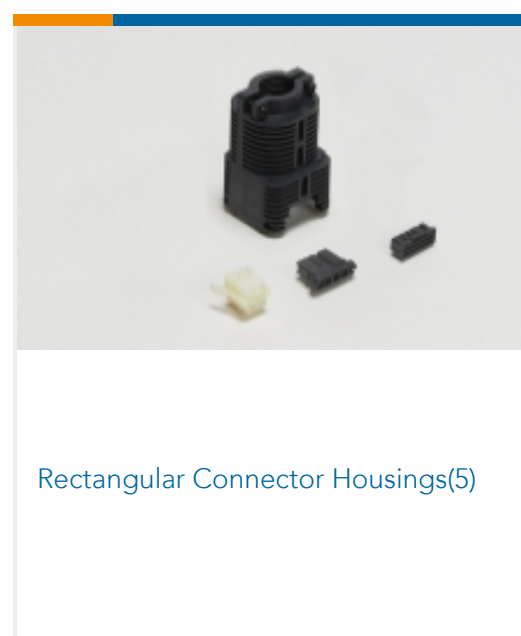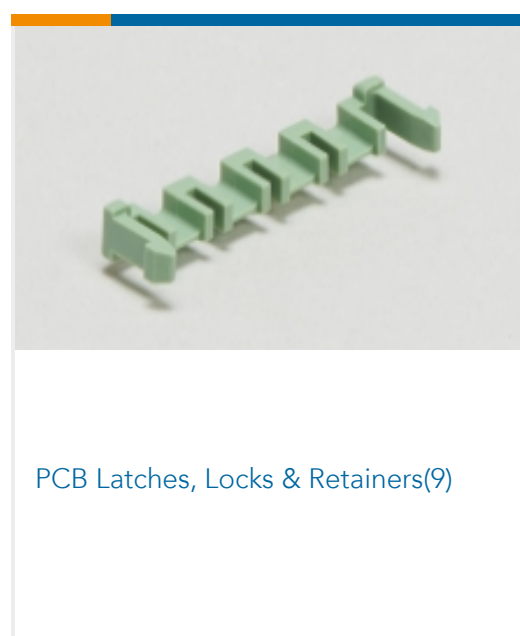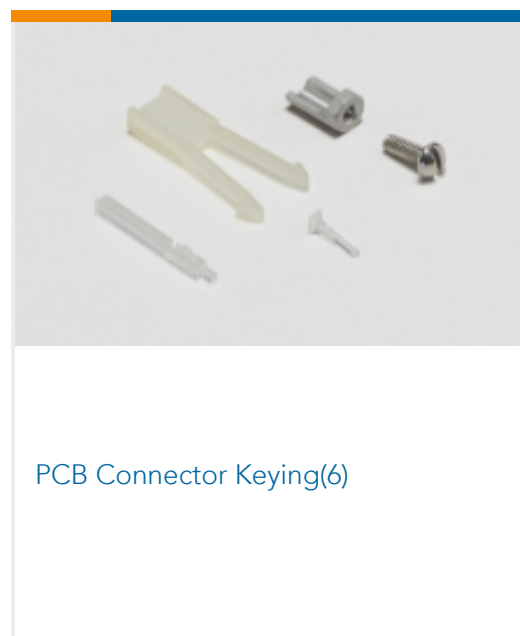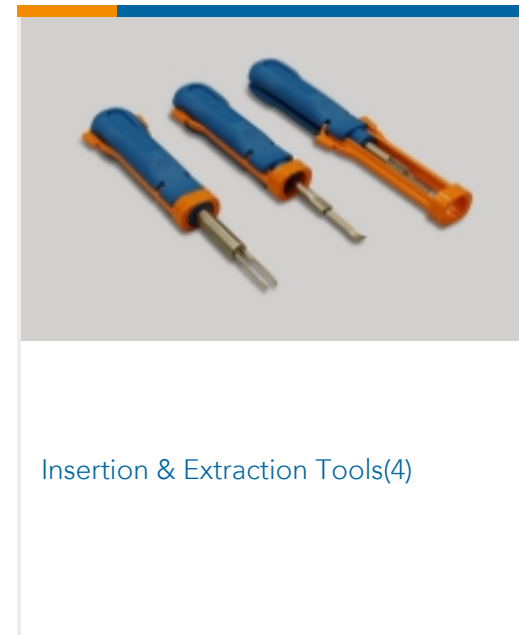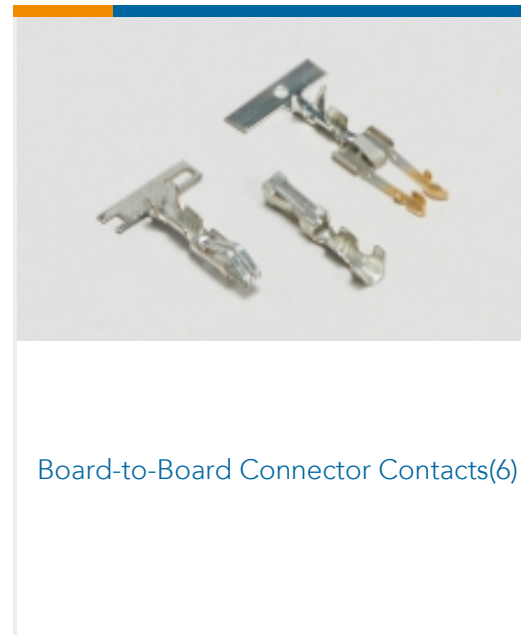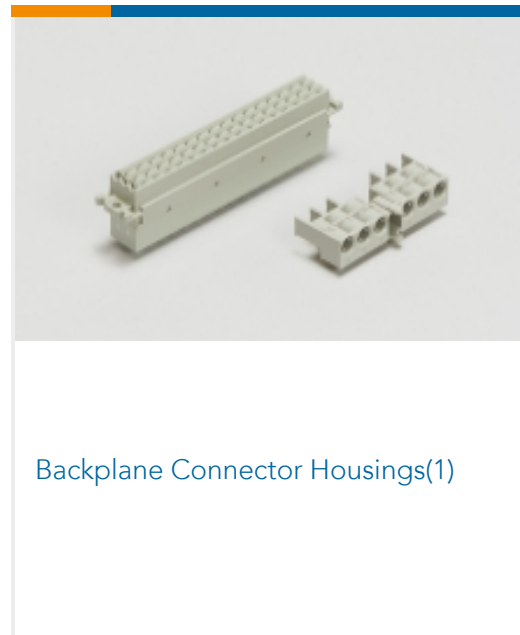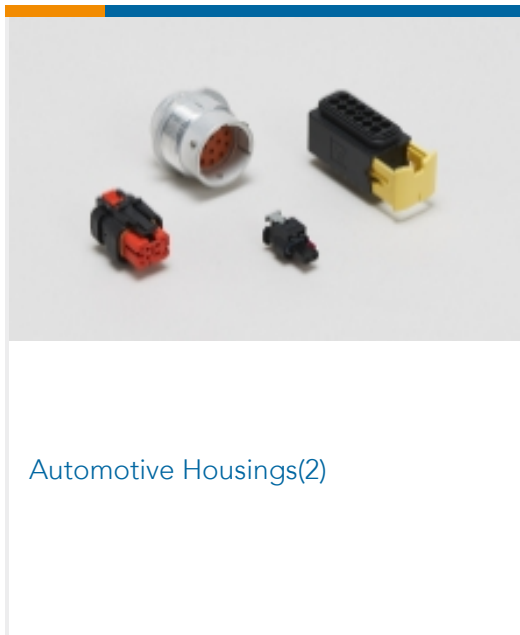

Customers Also Bought




TE Part #280366
AMPMODU II REC. HSG DUAL ROW,
16 POS.



TE Part #280365
AMPMODU, DBL ROW, CONTACT
REC




TE Part #280361
AMPMODU II REC. HSG, SINGLE
ROW 8 POS

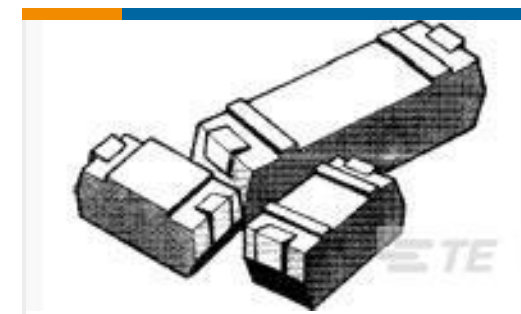

TE Part #1624250-4
CGS SL1 R022 5% TAPED



TE Part #1-2176156-7
TLM 1206 0.5W R013 1% 100PPM 5K RL

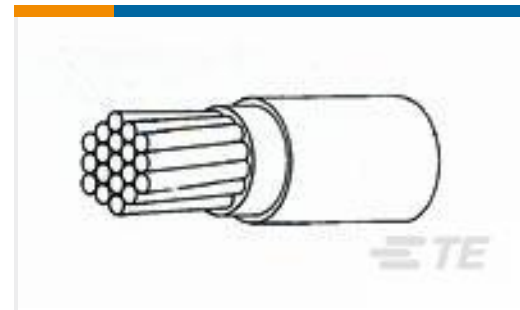

TE Part #2836863001
44A0211-20-1



TE Part #CQ24323001
100G0111-1.50-OCK0226/5

Documents

Product Drawings

MOD II CONTACT L.P.

English

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_181270-2_AN_c-181270-2-an.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_181270-2_AN_c-181270-2-an.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_181270-2_AN_c-181270-2-an.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

MOD II CONTACT L.P.

English

MOD II CONTACT L.P.

English

181270-2

Connector Contact, Socket, Wire-to-Board, 23 – 26 AWG Wire Size, 509.5 – 254.1
CMA Wire Size, .32 – .13 mm² Wire Size, Gold, Reel, AMPMODU IV/V

