

2-520932-2 ✓ ACTIVE

Ultra-Fast | Ultra-Fast 110

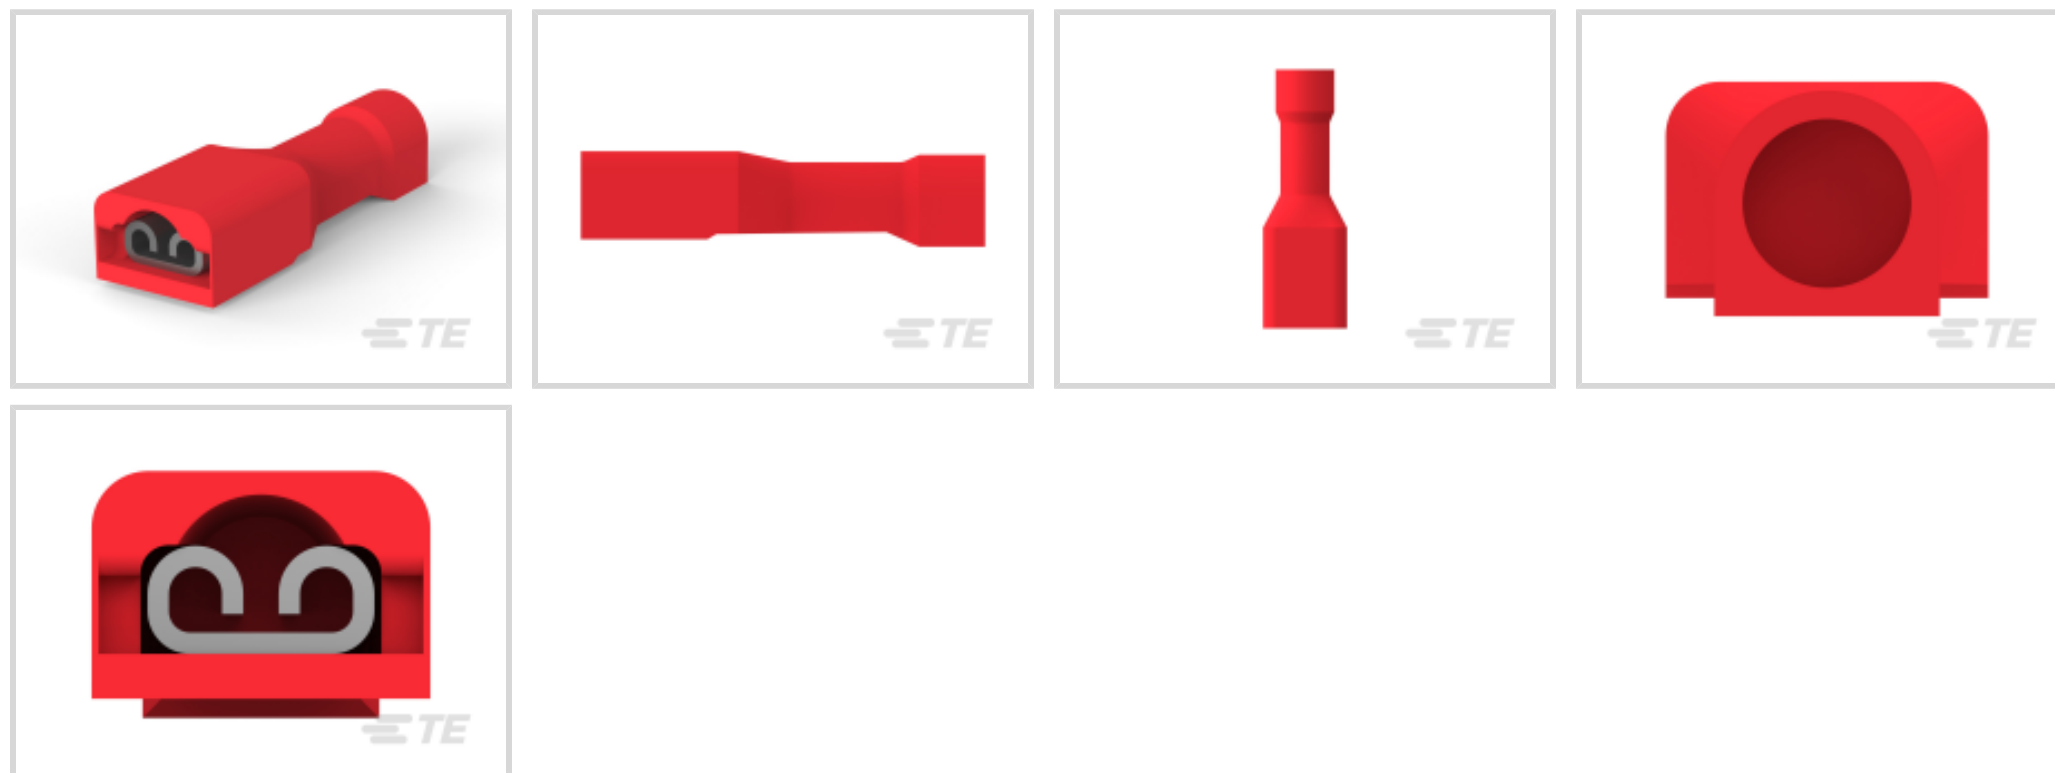
TE Internal #: 2-520932-2

Quick Disconnects, Receptacle, 22 – 18 AWG Wire Size, .32 – .82 mm² Wire Size, Mating Tab Width .11 in / .125 in [3.18 mm / 2.8 mm], Ultra-Fast 110

[View on TE.com >](#)



Terminals & Splices > Quick Disconnects



Quick Disconnect Terminal Type: **Receptacle**

Wire Size: .32 – .82 mm²

Mating Tab Width: 2.8 mm, 3.18 mm [.11 in, .125 in]

Mating Tab Thickness: .51 mm [.02 in]

Features

Product Type Features

Terminates To	Wire & Cable
Wire/Cable Type	Regular Wire
Wire Stop	Yes
Insertion Force	Normal
Sealable	No

Configuration Features

Connection Capacity	Single
---------------------	--------

Electrical Characteristics

Voltage (Max)	600 V
---------------	-------

Body Features

Insulation Material	Nylon
---------------------	-------

Contact Features

Quick Disconnect Terminal Type	Receptacle
Mating Tab Width	2.8 mm, 3.18 mm [.11 in][.125 in]



Mating Tab Thickness	.51 mm[.02 in]
Terminal Orientation	Straight
Contact Base Material	Brass
Terminal Plating Material	Tin
Crimp Type	F-Crimp
Barrel Type	Closed

Mechanical Attachment

Mating Retention Type	Dimple
Wire Insulation Support	With

Dimensions

Accepts Wire Insulation Diameter Range	1.52 – 3.05 mm[.06 – .12 in]
Receptacle Terminal Stock Thickness	.41 mm[.016 in]
Overall Length	18.7 mm[.735 in]
Wire Size	.32 – .82 mm ²

Usage Conditions

Insulation Option	Uninsulated
Operating Temperature Range	-40 – 110 °C[-40 – 230 °F]

Industry Standards

UL Flammability Rating	UL 94V-2
UL Rating	Listed

Packaging Features

Packaging Quantity	3000
Packaging Method	Strip/Reel

Other

Barrel Color	Red
--------------	-----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	



Current ECHA Candidate List: JUNE 2022

(224)

Candidate List Declared Against: JAN 2022

(223)

SVHC > Threshold:

Not Yet Reviewed

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 58079-3
DIE S U-FAST + FASTON 16-14 DIE SET



TE Part # 2-2836174-2
OCEAN-2.0-APPLICATOR-S-176SP173D



TE Part # 2836174-2
OCEAN-2.0-APPLICATOR-S-176SP173D



TE Part # 7-2836174-2
OCEAN-2.0-APPLICATOR-S-176SP173D



KIT
REPRESENTATION ONLY

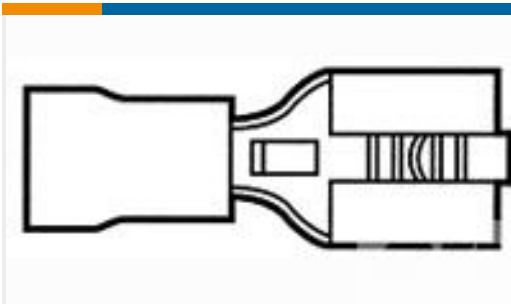
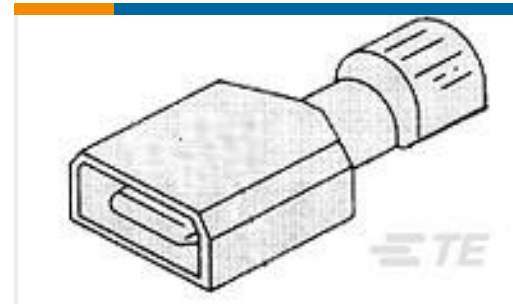
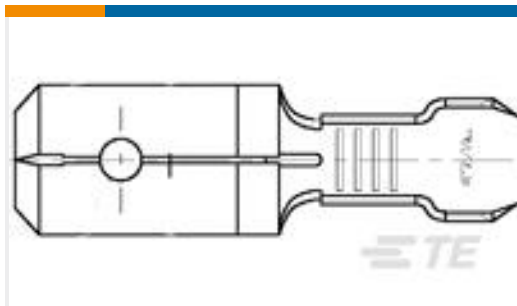
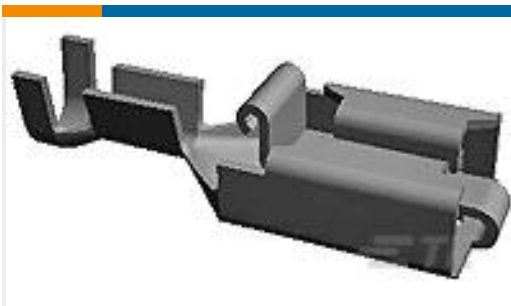
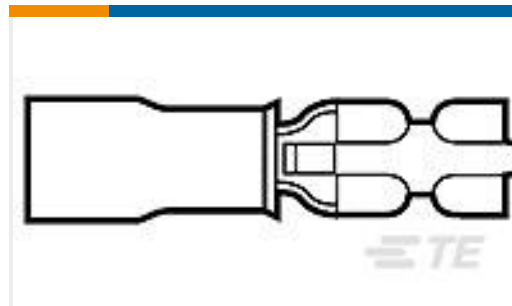
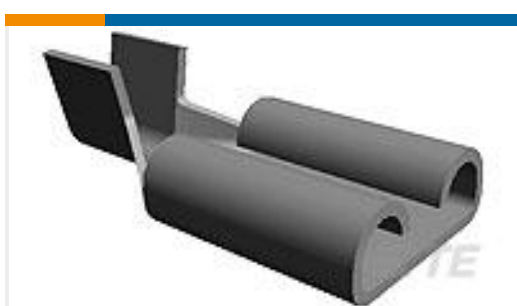
TE Part # 7-2836174-7
OCEAN_2.0_SPARE_PART_KIT-176SP173D

Also in the Series | **Ultra-Fast 110**



Quick Disconnects(14)

Customers Also Bought

TE Part #2273100-3
M12 A-CODE MALE R/A PIGTAILTE Part #640905-2
RECEPT, PIDG FASTON 16-14 250TE Part #640907-2
RECEPT, PIDG FASTON 12-10 250TE Part #3-521057-2
ULTRAFAST 250 ASSY TAB 16-14
AWG TPBRTE Part #42475-4
250 FASTON TAB 22-18 AWG TPBRTE Part #170233-1
PL 250 REC 0.5-2.27 MM2 BRTE Part #640929-2
RECEPT, PIDG FASTON 16-14 110TE Part #640917-2
RECEPT, PIDG FASTON 22-18 187TE Part #60601-1
110 FASTON REC 20-18 AWG TPBR

Documents

Product Drawings

[ULTRA-FAST .110/.125 ASY REC 22-18 TPBR](#)

English

CAD Files

[3D PDF](#)

[3D](#)

[Customer View Model](#)

[ENG_CVM_CVM_2-520932-2_D.2d_dxf.zip](#)



English

Customer View Model

[ENG_CVM_CVM_2-520932-2_D.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2-520932-2_D.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Datasheets & Catalog Pages

[Ultra-Fast and Ultra Fast Plus](#)

English

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[MD_2-520932-2_020620182345_dmtec](#)

English

[MD_2-520932-2_020620182345_dmtec](#)

English

Agency Approvals

[Agency Approval Document](#)

English