
# 193839-3 - ACTIVE

#### ELCON

TE Internal #: 193839-3 Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 4 Position, .25 in [6.35 mm] Centerline, Printed Circuit Board, UL 94V-0

#### View on TE.com >

Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

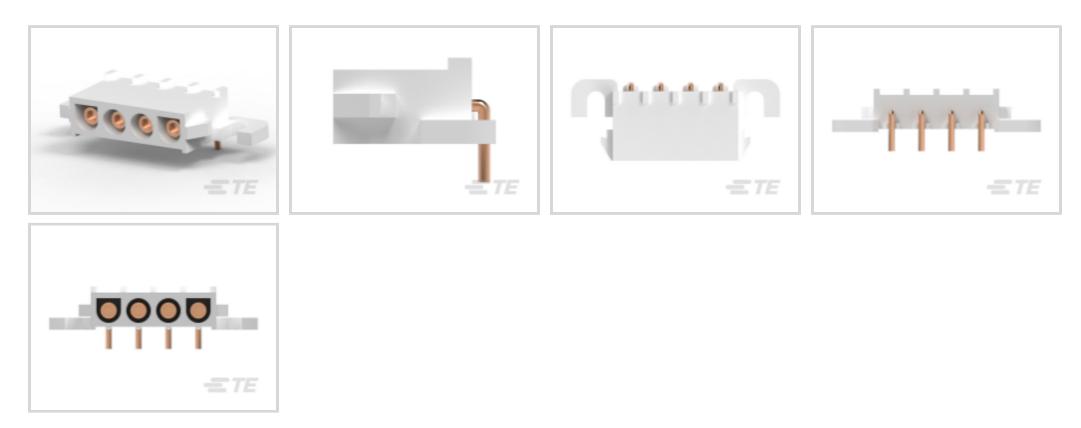

Rectangular Power Connector Type: Header Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 6.35 mm [.25 in ]

# Features



#### **Product Type Features**

Rectangular Power Connector Type	Header
Connector & Housing Type	Receptacle
Connector System	Wire-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Configuration Features	
Number of Positions	4
PCB Mount Orientation	Right Angle
Number of Rows	0
Contact Features	
Contact Layout	Inline
Contact Current Rating (Max)	36 A
Contact Retention Within Housing	Without
Contact Type	Socket

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 4 Position, .25 in [6.35 mm] Centerline, Printed Circuit Board, UL 94V-0



PCB Contact Termination Area Plating Material	Silver
Contact Mating Area Plating Material	Silver
Contact Mating Area Plating Material Thickness	5.08 μm[200 μin]
Contact Termination Area Plating Thickness	5.08 μm[200 μin]
Termination Features	
Termination Post & Tail Length	4.06 mm[.16 in]
Termination Method to Printed Circuit Board	Through Hole - Solder
Mechanical Attachment	
Strain Relief	Without
Mating Alignment Type	Polarization
Mating Alignment	With
PCB Mount Alignment	Without
PCB Mount Retention	With
PCB Mount Retention Type	Mounting Hole
Connector Mounting Type	Board Mount
Mating Retention	With
Mating Retention Type	Locking Tab

#### Housing Features

Housing Color	White
Housing Material	Nylon GF
Dimensions	
Width	17.27 mm
PCB Thickness (Recommended)	1.57 mm[.062 in]
Height	9.14 mm
Length	44.32 mm
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Assembly Integration Feature	Without
Circuit Application	Power
Industry Standards	

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 4 Position, .25 in [6.35 mm] Centerline, Printed Circuit Board, UL 94V-0



CSA Rating	Certified
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Agency/Standard Number	E28476
Agency/Standard	CSA, UL
UL Rating	Recognized
CSA File Number	LR16455
VDE Tested	Yes
Packaging Features	
Packaging Method	Bag
Packaging Quantity	50
Other	
For Use With	Plug Housing

### **Product Compliance**

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Wave solder capable to 265°C

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 4 Position, .25 in [6.35 mm] Centerline, Printed Circuit Board, UL 94V-0



on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

# **Compatible Parts**



# Customers Also Bought



TE Part #1-1437508-7 8058-1G33=T05 SOCKET 200 CIRC

# Documents

Product Drawings SKT HEADER, RIGHT ANGLE

English

Rectangular Power Connectors, Header, Receptacle, Wire-to-Board, 4 Position, .25 in [6.35 mm] Centerline, Printed Circuit Board, UL 94V-0



CAD Files Customer View Model ENG\_CVM\_CVM\_193839-3\_D.2d\_dxf.zip English 3D PDF 3D Customer View Model ENG\_CVM\_CVM\_193839-3\_D.3d\_igs.zip English Customer View Model ENG\_CVM\_CVM\_193839-3\_D.3d\_stp.zip English

Datasheets & Catalog Pages SOFT\_SHELL\_PIN\_SOCKET\_CONNECTORS\_STANDARD\_DENSITY

English

Product Specifications Application Specification

English

Product Environmental Compliance TE Material Declaration

English

Agency Approvals VDE Certificate

English