

Generation Y Connector System

TE Internal #: 2098922-6 Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 54 Position, .1 in [2.54 mm] Centerline, Sealable, Yellow, Generation Y Connector System

View on TE.com >

Connectors > Automotive Connectors > Connector Housings



Connector & Housing Type: Housing for Female Terminals Mating Tab Width: .64 mm [.025 in] Connector System: Wire-to-Board, Wire-to-Device Number of Positions: 54 Centerline (Pitch): 2.54 mm [.1 in]

Features



Product Type Features

Connector & Housing Shape	Rectangular
Connector & Housing Type	Housing for Female Terminals
Connector System	Wire-to-Board, Wire-to-Device
Sealable	Yes
Hybrid Connector	No
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	54
Number of Rows	3
Body Features	
Cable Exit Angle	90°
Body Material	PAGF
Primary Product Color	Yellow
Connector Code	В

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 54 Position, .1 in [2.54 mm] Centerline, Sealable, Yellow, Generation Y Connector System



Contact Features

Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.64 mm[.025 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	Yes
Strain Relief	Add By Accessory
Mating Alignment Type	Keyed
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Product Width	61.19 mm[2.41 in]
Product Length	67 mm[2.63 in]
Product Height	39.45 mm[1.55 in]
Row-to-Row Spacing	6 mm[.236 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C[158 °F][167 °F] [176 °F][185 °F]
Operating Temperature Range	-40 – 85 °C[-40 – 185 °F]
Operation/Application	
Circuit Application	Signal
Industry Standards	
Agency/Standard	GMW3191
Packaging Features	
Packaging Quantity	24
Packaging Method	Package
Other	
Serviceable	Yes
Connector Position Assurance Capable	Yes

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 54 Position, .1 in [2.54 mm] Centerline, Sealable, Yellow, Generation Y Connector System



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | Generation Y Connector System

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 54 Position, .1 in [2.54 mm] Centerline, Sealable, Yellow, Generation Y Connector System



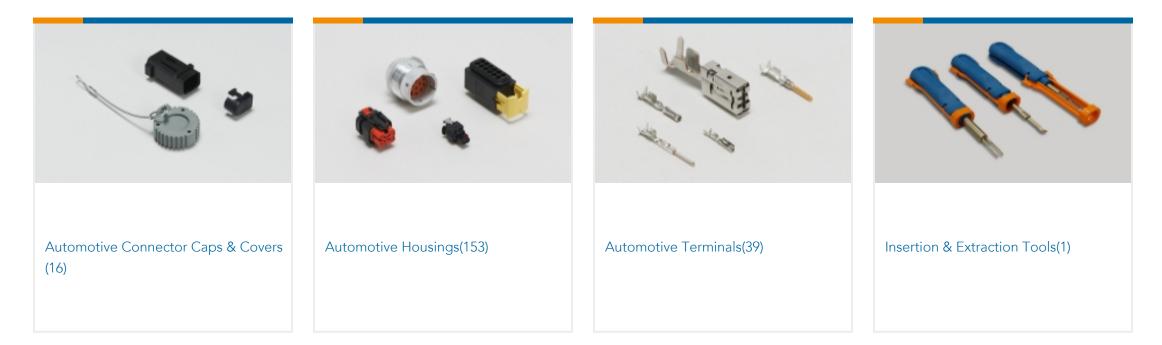



Customers Also Bought



DEUTSCH DT Series Housings & Connectors

DEUTSCH DT WEDGELOCKS

AMP SUPERSEAL 1.5MM, CONNECTOR HOUSING

SINGLE WIRE SEAL



Documents

Product Drawings SDM,54P PLUG ASY,RHL,KEY B
English
CAD Files 3D PDF
3D
Customer View Model ENG_CVM_CVM_2098922-6_A.2d_dxf.zip

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Board / Wire-to-Device, 54 Position, .1 in [2.54 mm] Centerline, Sealable, Yellow, Generation Y Connector System



English
Customer View Model

ENG_CVM_CVM_2098922-6_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2098922-6_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Instruction Sheets Instruction Sheet (U.S.)

English