
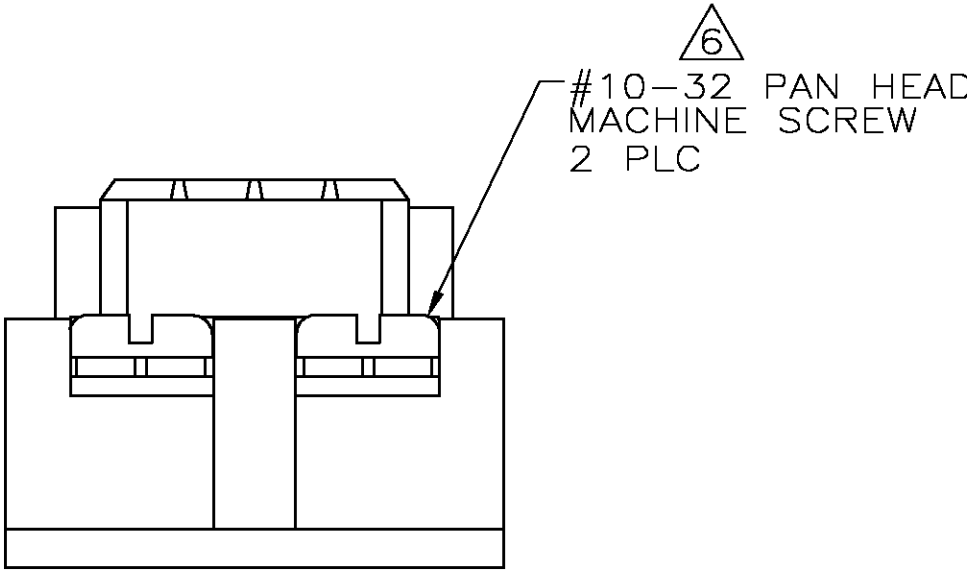


LOC	DIST	REVISIONS				
		F	LTR	DESCRIPTION	DATE	OWN
FT	0	G		REVISED PER 063B-0188-05	4/22/05	SS
						GS

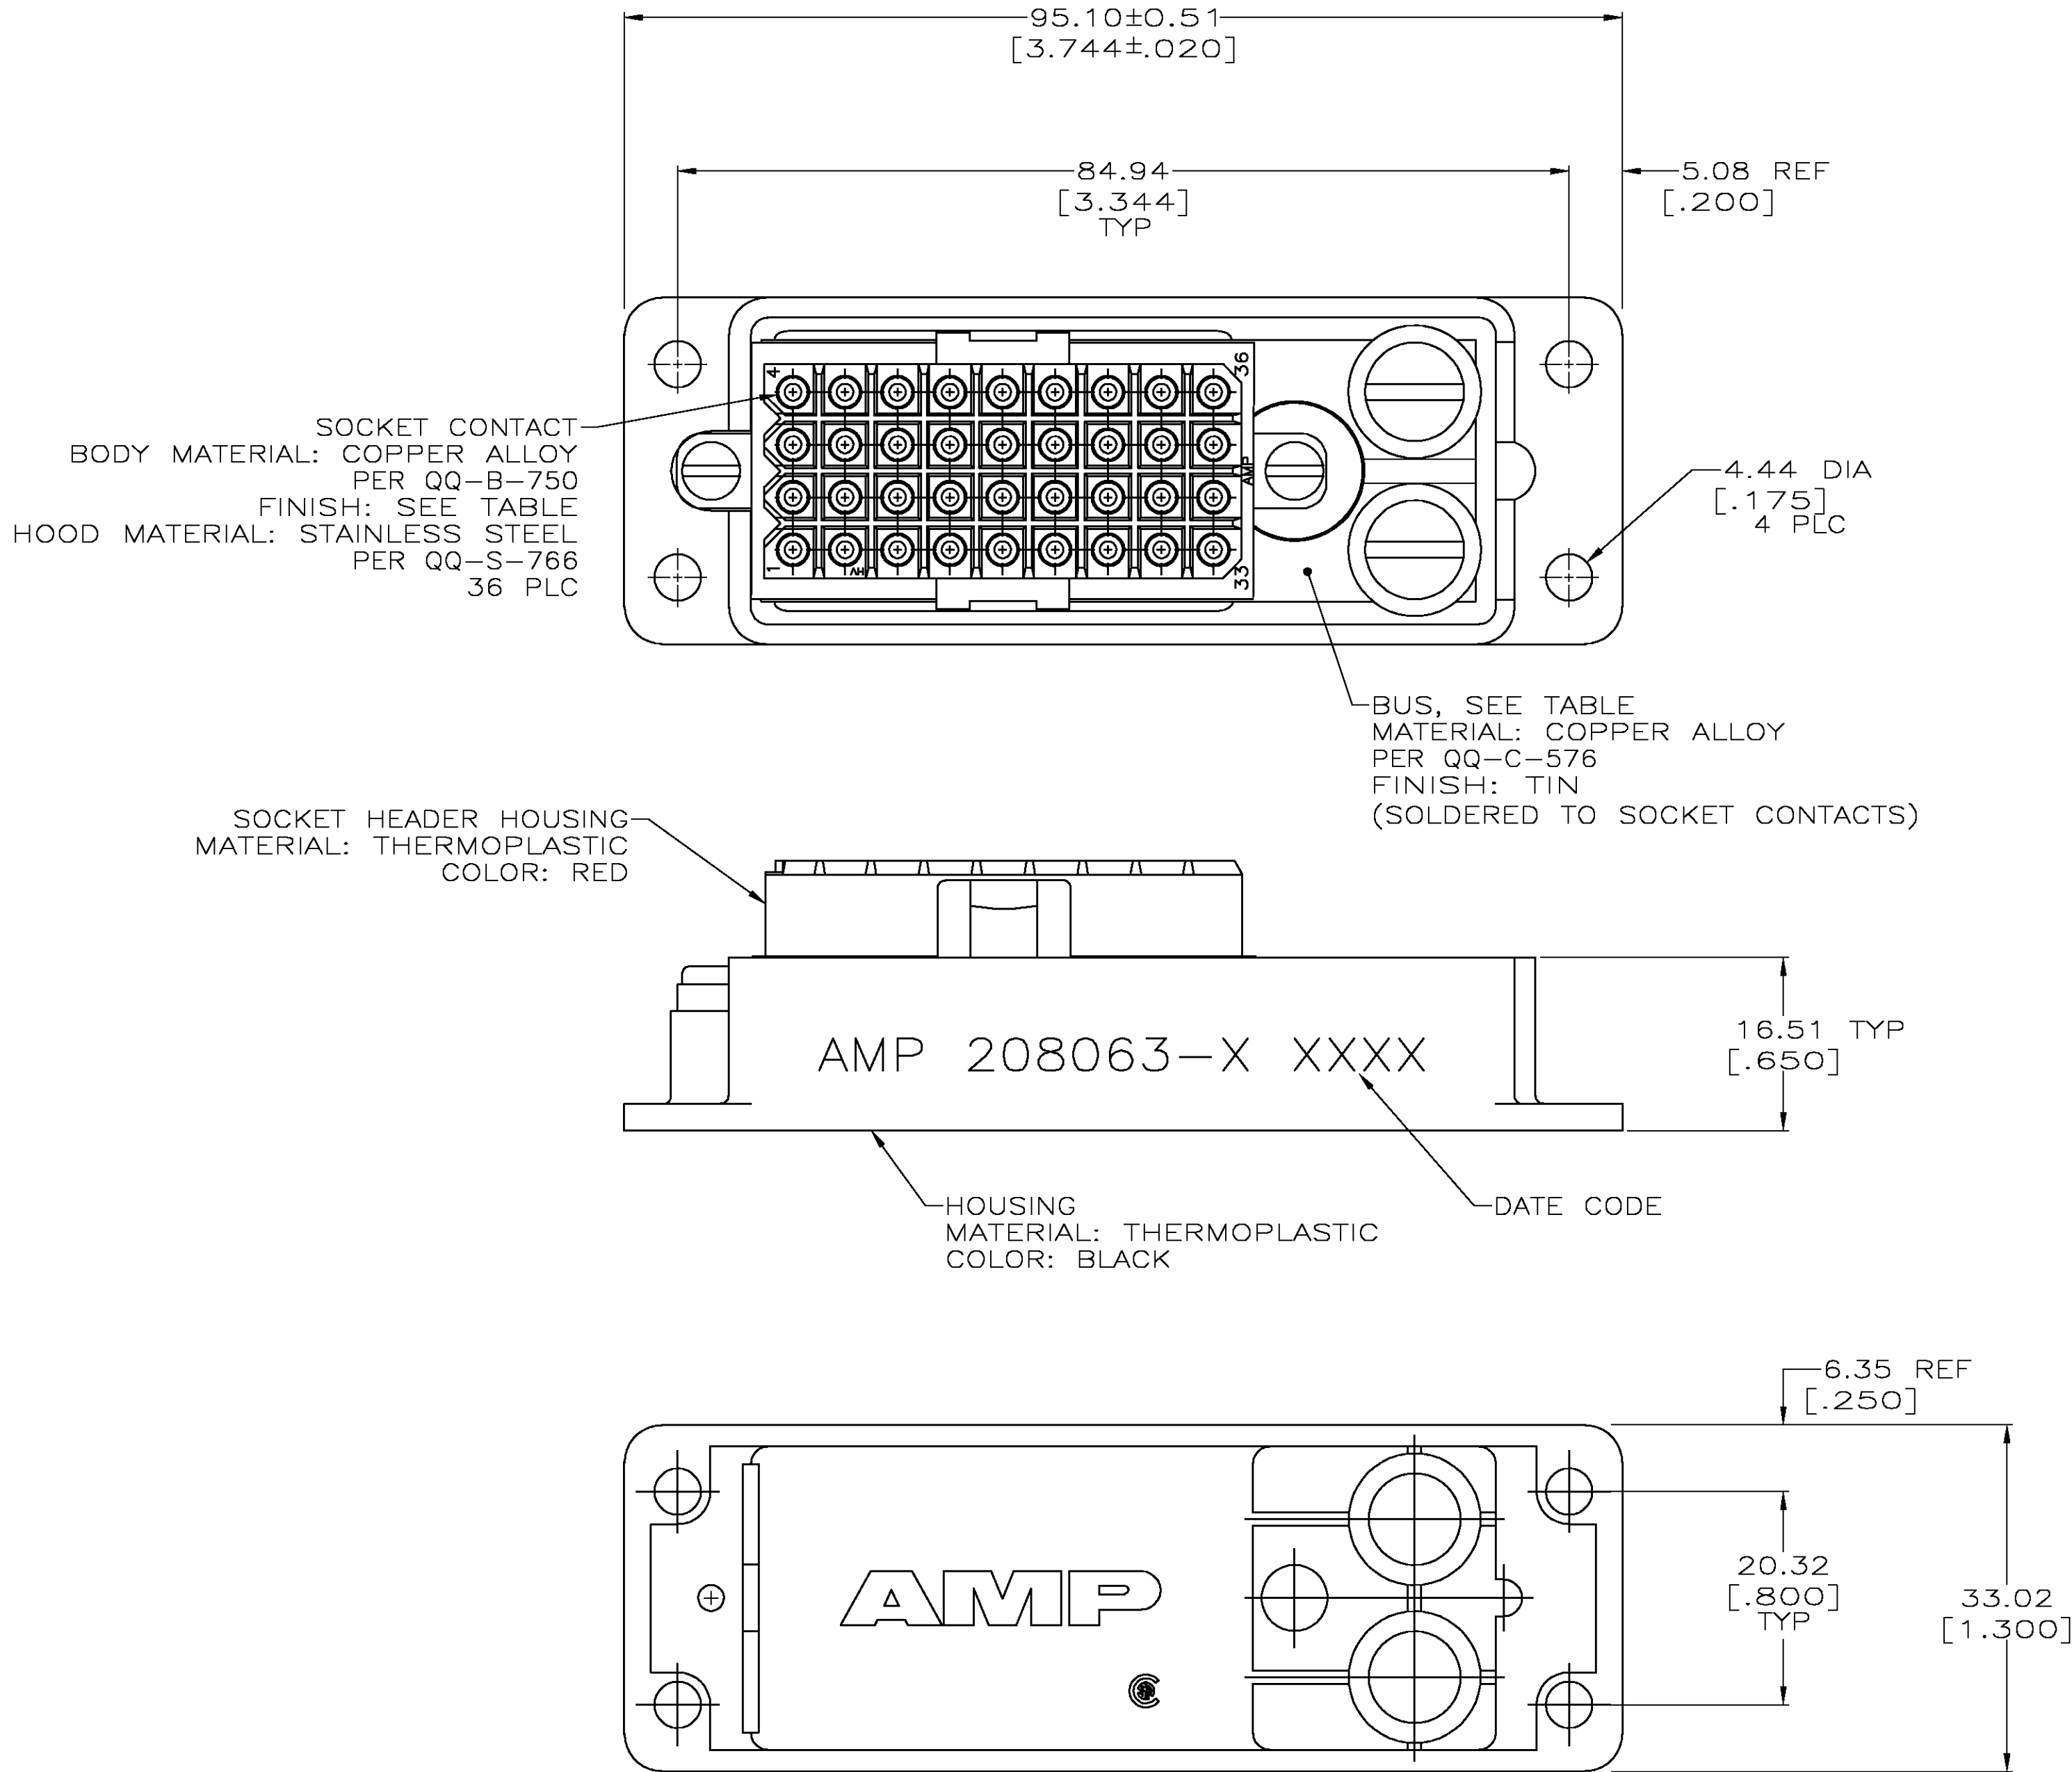

- MATES WITH RECEPTACLE 207020-1.
- TIN-LEAD OVER NICKEL PER QQ-N-290.
- GOLD FLASH PER MIL-G-45204 OVER 1.27um [.000050] MIN NICKEL PER QQ-N-290 ON ENTIRE CONTACT, WITH 0.76um [.000030] MIN GOLD PER MIL-G-45204 ON ELECTRICAL ENGAGEMENT AREA ONLY.
- ALL CIRCUITS COMMONED TO BUS.
- CONNECTOR IS DIVIDED LENGTHWISE WITH CIRCUITS 1, 2, 5, 6, 9, 10, 13, 14, 17, 18, 21, 22, 25, 26, 29, 30, 33 AND 34 COMMONED, AND CIRCUITS 3, 4, 7, 8, 11, 12, 15, 16, 19, 20, 23, 24, 27, 28, 31, 32, 35 AND 36 COMMONED.
- WILL ACCEPT RING TONGUE TERMINALS, STUD SIZE 10.
- TIN OVER NICKEL PER QQ-N-290.

OBSOLETE	DUAL, 18 POSITION	3	7	3	208063-7
	DUAL, 18 POSITION	3	7	7	208063-6
	FULL, 36 POSITION	4	7	7	208063-5
	DUAL, 18 POSITION	3	2	3	208063-4
	FULL, 36 POSITION	4	2	3	208063-3
	DUAL, 18 POSITION	3	2	2	208063-2
	FULL, 36 POSITION	4	2	2	208063-1
BUS TYPE		TAIL FINISH	POST FINISH	PART NO	

THIS DRAWING IS A CONTROLLED DOCUMENT.		OWN D.GELTZ 8-27-92	Tyco Electronics Corporation Harrisburg, Pa 17105-3608		
DIMENSIONS: INCHES		CHK J.McCLINTON 8-27-92	NAME A. TRAVIS		
		APPRO PRODUCT SPEC	COMMONING DEVICE ASSEMBLY, 36 POSITION, METRIMATE		
		APPLICATION SPEC			
		WEIGHT			
MATERIAL SEE CALLOUTS	SEE CALLOUTS	SIZE CAGE CODE DRAWING NO A100779	C=208063		RESTRICTED TO —
CUSTOMER DRAWING		SCALE 2:1	SHEET 1 OF 1	REV G	