


				1							
LOC BD	DIST 39	P	F	REVISIONS							
				ZONE	LTR	DESCRIPTION				DATE	APPD
					W	OBS 1--5 PER EC 0020-1039-95				06 SEP 95	MM
					Y	OBS -9 PER EC 0020-1325-95				20 FEB 96	MM

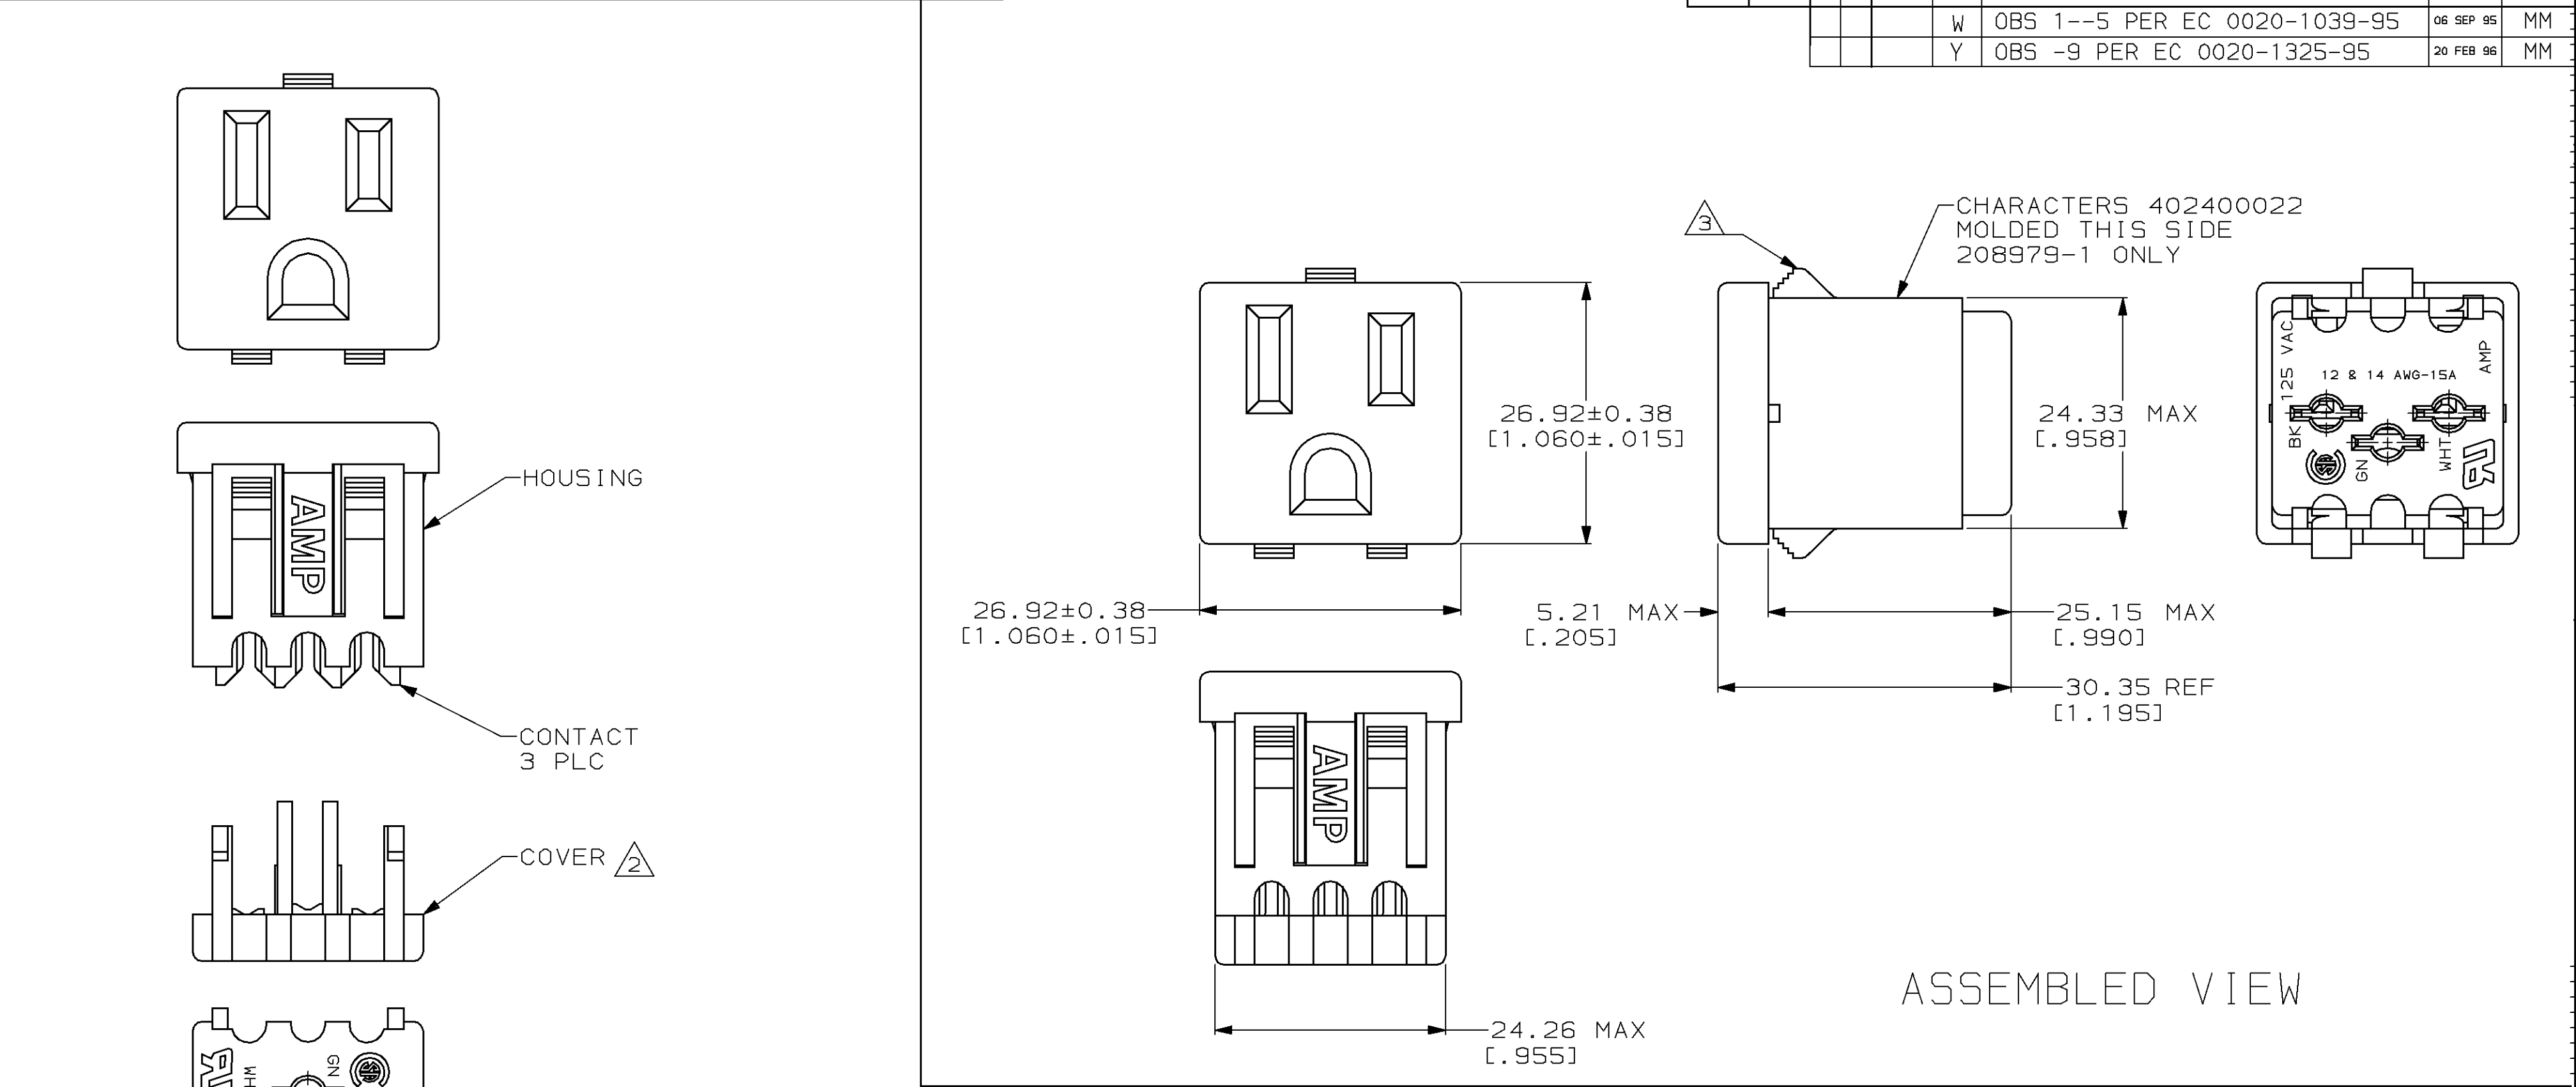

ASSEMBLED VIEW

OBSOLETE	-	1-208979-5
	PUTTY WHITE	1-208979-4
OBSOLETE	BLACK	1-208979-3
	ORANGE	1-208979-2
	GRAY	1-208979-1
	GRAY	1-208979-0
OBSOLETE	CREAM	208979-9
OBSOLETE	WHITE	208979-7
	ALMOND	208979-4
OBSOLETE	BLACK	208979-2
	BLACK	208979-1
HOUSING COLOR		PART NO

DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON : 2 PLC DEC ± - 3 PLC DEC ± - ANGLES ± - MATERIAL HOUSING: NYLON, SEE TABLE COVER: NYLON, BLACK CONTACTS: BRASS FINISH -	DR 5-1-91 B.MOYER	AMP AMP Incorporated Harrisburg, PA 17105-3608		
	CHK 5-7-91 R STONE			
MATERIAL HOUSING: NYLON, SEE TABLE COVER: NYLON, BLACK CONTACTS: BRASS FINISH -	APPD 5-7-91 D L ROCKER	NAME		
	APPD 5-7-91 J FULPONI	RECEPTACLE KIT, UNASSEMBLED, WITH COVER, CONVENIENCE OUTLET		
MATERIAL HOUSING: NYLON, SEE TABLE COVER: NYLON, BLACK CONTACTS: BRASS FINISH -	PRODUCT SPEC	SIZE		
	APPLICATION SPEC	CAGE CODE		
MATERIAL HOUSING: NYLON, SEE TABLE COVER: NYLON, BLACK CONTACTS: BRASS FINISH -	WEIGHT	DRAWING NO		
		208979		
		SCALE	2:1	SHEET 1 OF 1

RECOMMENDED PANEL CUTOUT

- CONTACTS TO ACCEPT 14 AWG AND 12 AWG SOLID COPPER WIRE OR 14 AWG STRANDED WIRE WHEN USED WITH AMP 205 SERIES FASTON™ TAB.
- COVER PACKAGED UNASSEMBLED.
- SNAP IN FEATURE ACCOMODATES 0.76-1.78 [.030-.070] PANEL THICKNESS ONLY.
- ALL HOUSINGS AND COVERS ARE UL 94V-2 RATED UNLESS OTHERWISE SPECIFIED.
- UL 94V-0 RATED HOUSING AND COVER.