

AMP | AMP Type II

TE Internal #: 207893-1

Power Contacts, Contact, Gold, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wire-to-Wire, 1 Position, Wire & Cable, Crimp,

Signal, Pin, AMP Type II

View on TE.com >



Connectors > Power Connectors > Power Contacts



Power Contact Type: Contact

Contact Mating Area Plating Material: Gold

Wire Size: .8 – 1.4 mm²

Connector System: Wire-to-Wire

Features

Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	1
Electrical Characteristics	
Test Current	13 A
Contact Features	
Contact Mating Area Plating Material	Gold
Contact Current Rating (Max)	13 A
Contact Type	Pin
Contact Retention Within Housing	With
Mating Pin Diameter	1.6 mm[.063 in]
Contact Base Material	Copper Alloy
Contact Mating Area Plating Material Thickness	.76 μm[30 μin]
Contact Mating Area Plating Material Finish	Bright
Wire Contact Termination Area Plating Thickness	.76 μm[30 μin]
Wire Contact Termination Area Plating Material	Gold



Contact Orientation	Straight
Contact Underplating Material	Nickel
Contact Underplating Material Thickness	1.27 μm[50 μin]
Contact Size	16
Termination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Contact Retention Type Within Housing	Snap-In
Wire Insulation Support	Without
Dimensions	
Wire Size	.8 – 1.4 mm²
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-55 – 302 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Bag
Packaging Quantity	1000
Other	
Wire/Cable Type	Discrete Wire
For Use With	CPC Connectors

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant with Exemptions
EU ELV Directive 2000/53/EC	Compliant with Exemptions
China RoHS 2 Directive MIIT Order No 32, 2016	Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Pb (3.7% in Component Part) Article Safe Usage Statements:



Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.

Not applicable for solder process capability

homogenous material. Also BFR/CFR/PVC Free	Halogen Content Low Halogen - Br, Cl, F, I < 900 ppm pe
--	--

Product Compliance Disclaimer


Solder Process Capability

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | AMP Type II

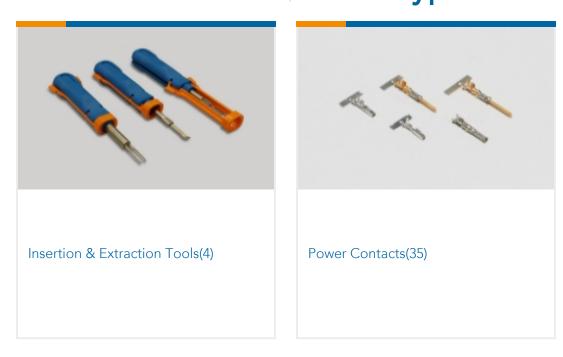

Customers Also Bought



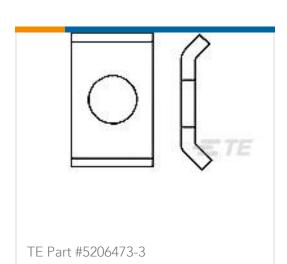

SADDLE WASHER, SPECIAL, ZN PLTD





TE Part #5748271-1

FEMALE SCREWLOCK KIT













Documents

Product Drawings

CONTACT PIN ASSY.

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_207893-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_207893-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_207893-1_D.3d_stp.zip

English

3D PDF

English

Power Contacts, Contact, Gold, 18 – 16 AWG Wire Size, .8 – 1.4 mm² Wire Size, Wireto-Wire, 1 Position, Wire & Cable, Crimp, Signal, Pin, AMP Type II



Customer View Model

ENG_CVM_207893-1_B.3d_igs.zip

English

Customer View Model

ENG_CVM_207893-1_B.3d_stp.zip

English

Customer View Model

ENG_CVM_207893-1_B.2d_dxf.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications

Application Specification

Japanese

Application Specification

English