2-178288-4 - ACTIVE

Dynamic Series | Dynamic 3000 Series

TE Internal #: 2-178288-4 Housing, Receptacle, Wire-to-Board, 4 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings >



Receptacle and Tab Housing: 3.81 mm pitch, 250V

Connector Product Type: Housing

Connector & Housing Type: Receptacle

Connector System: Wire-to-Board

Number of Positions: 4

Centerline (Pitch): 3.81 mm [.15 in]

All Receptacle and Tab Housing: 3.81 mm pitch, 250V (45)



Features

Product Type Features

Connector Product Type	Housing						
Connector & Housing Type	Receptacle						
Connector System	Wire-to-Board						
Sealable	No						
Connector & Contact Terminates To	Wire & Cable						
Configuration Features							
Number of Positions	4						
Number of Rows	1						
Termination Features							
Termination Method to Wire & Cable	Crimp						
Mechanical Attachment							

C For support call+1 800 522 6752

07/23/2022 05:06AM | Page 1

Housing, Receptacle, Wire-to-Board, 4 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series



Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	3.81 mm[.15 in]
Housing Color	Black
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223)

(223)

SVHC > Threshold: Not Yet Reviewed

Not Low Halogen - contains Br or Cl > 900 ppm.

Not applicable for solder process capability

Halogen Content

Solder Process Capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


Compatible Parts

Housing, Receptacle, Wire-to-Board, 4 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series




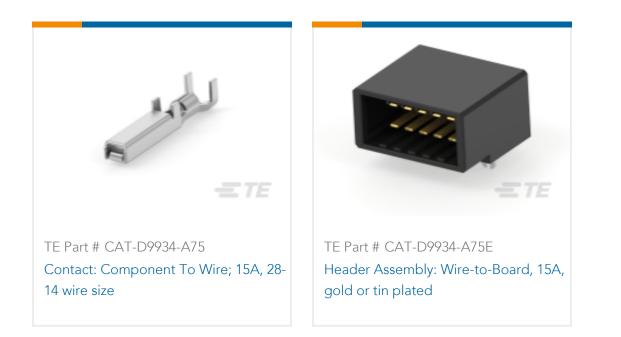

Also in the Series | Dynamic 3000 Series

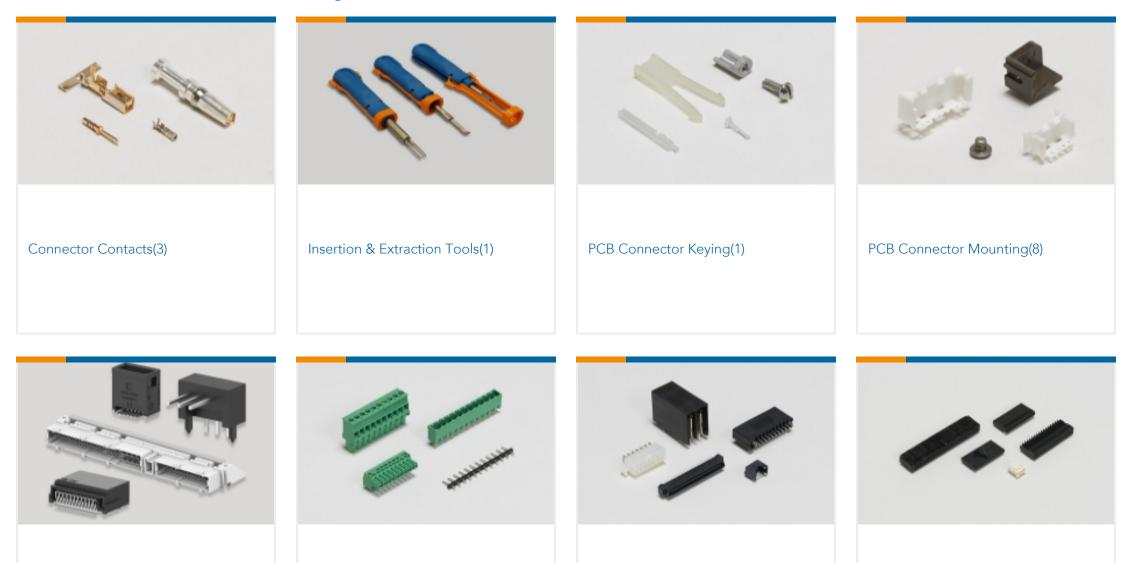

PCB Headers & Receptacles(283)	PCB Terminal Blocks(25)	Standard Rectangular Connectors(2)	Wire-to-Board Connector Assemblies
			& Housings(152)



Customers Also Bought



Housing, Receptacle, Wire-to-Board, 4 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series





Documents

Product Drawings DYNAMIC 3100 REC HSG 4P BLACK

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2-178288-4_S.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2-178288-4_S.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2-178288-4_S.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

Japanese

1-1773732-4_DYNAMIC_SERIES_CATALOG_ENGLISH

English

Product Specifications

Product Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Agency Approvals TUV Certificate

& For support call+1 800 522 6752

Housing, Receptacle, Wire-to-Board, 4 Position, 3.81 mm [.15 in] Centerline, Crimp, 1 Row, Black, Mating Retention, Wire & Cable, Dynamic 3000 Series



English