
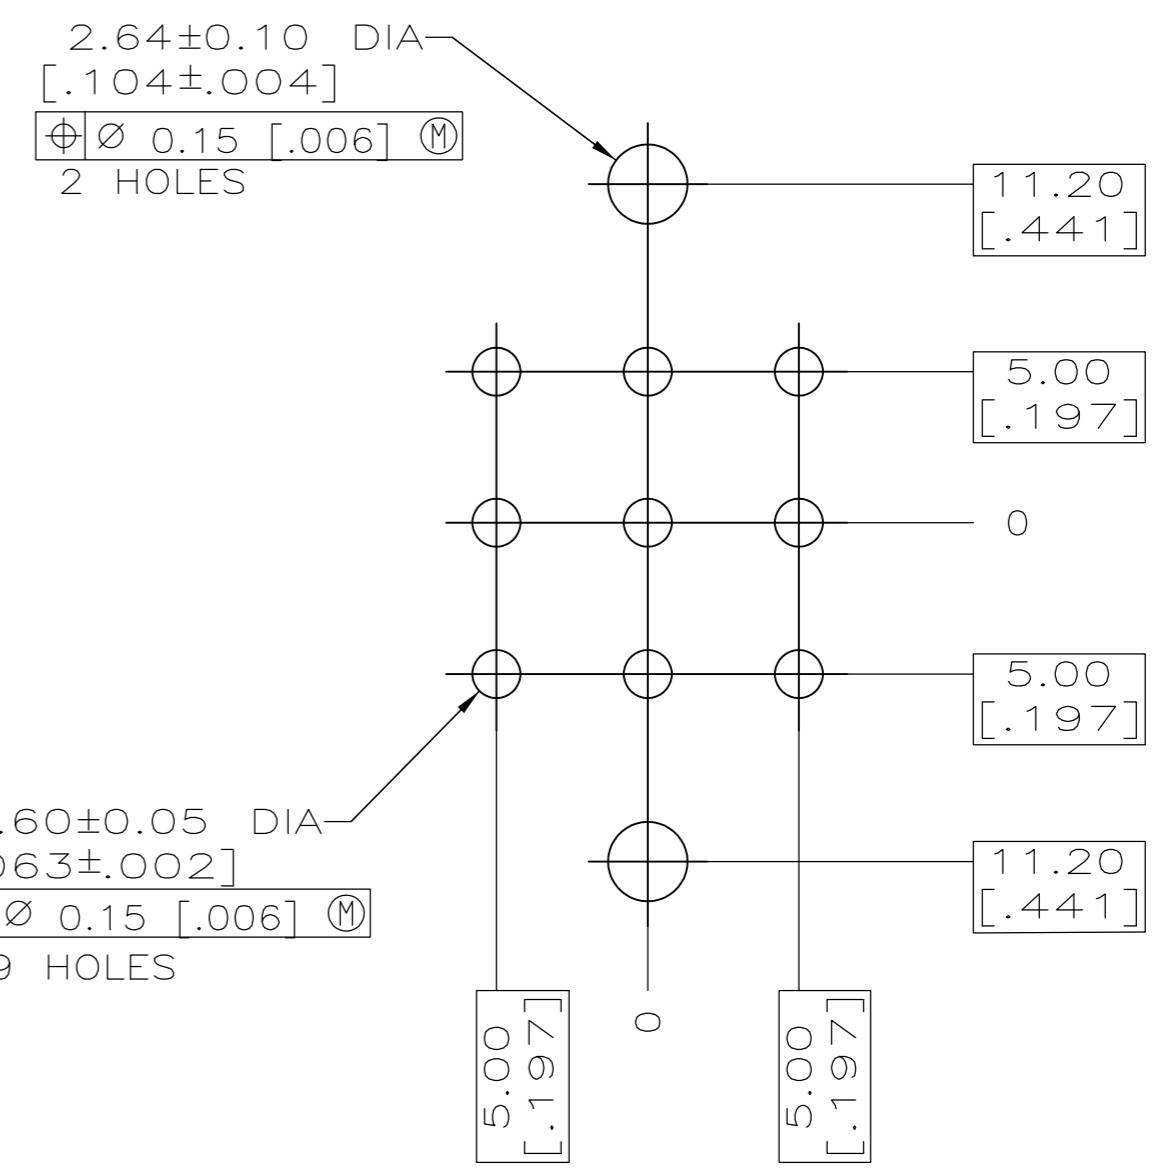
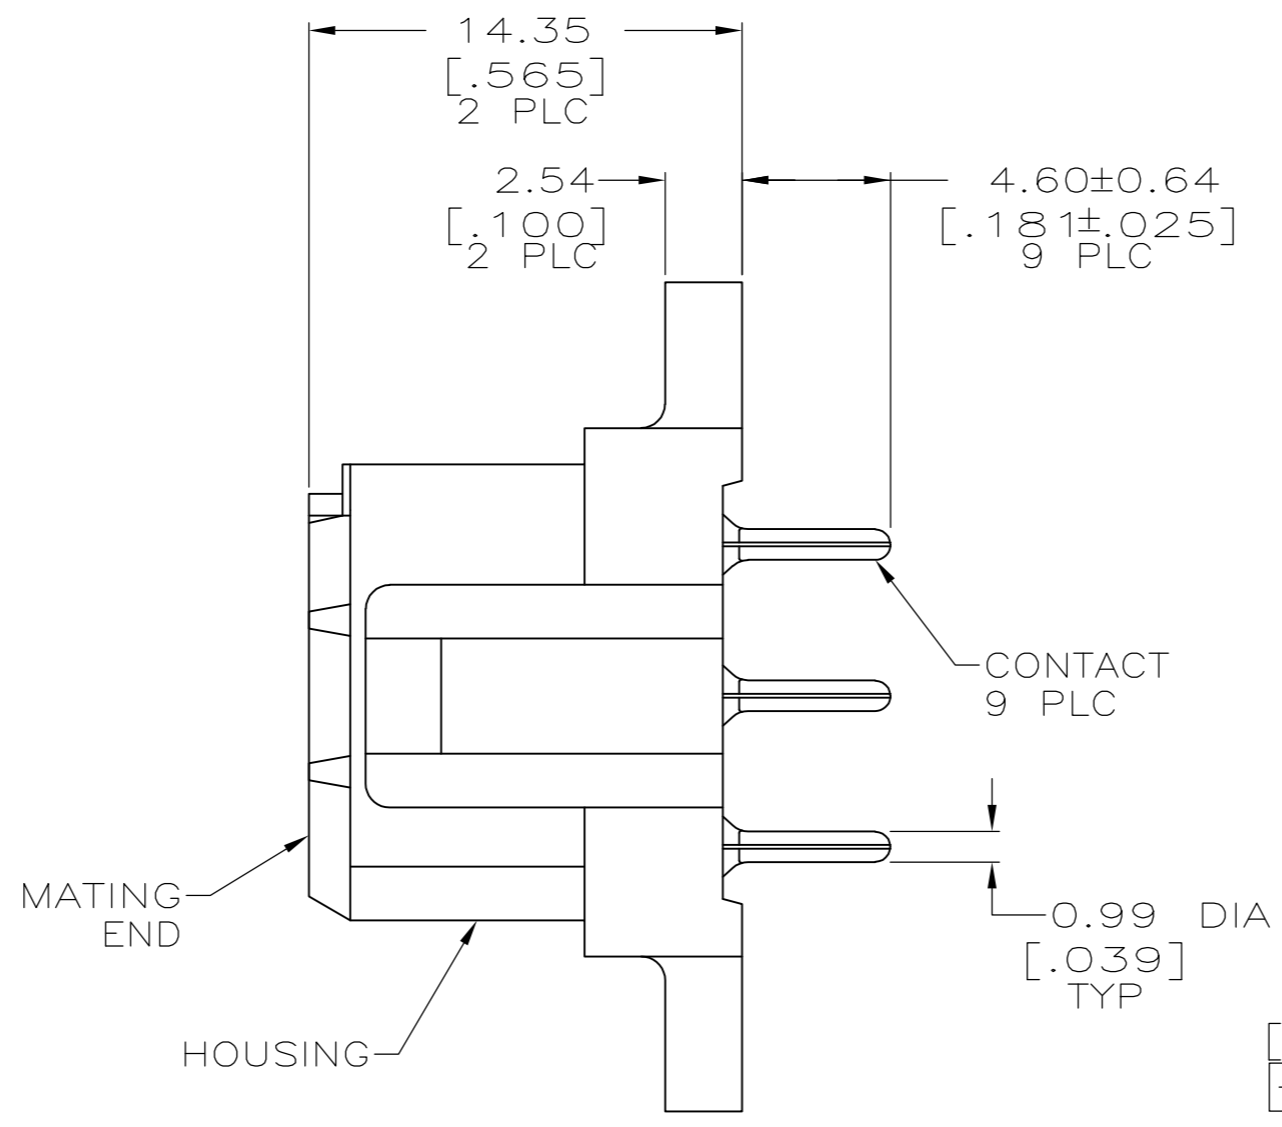


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION  
 © COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
FT	0	P	LTR	DESCRIPTION	DATE	DWN	APVD
		M1		REVISED PER ECO-11-005027	11MAR11	RK	HMR

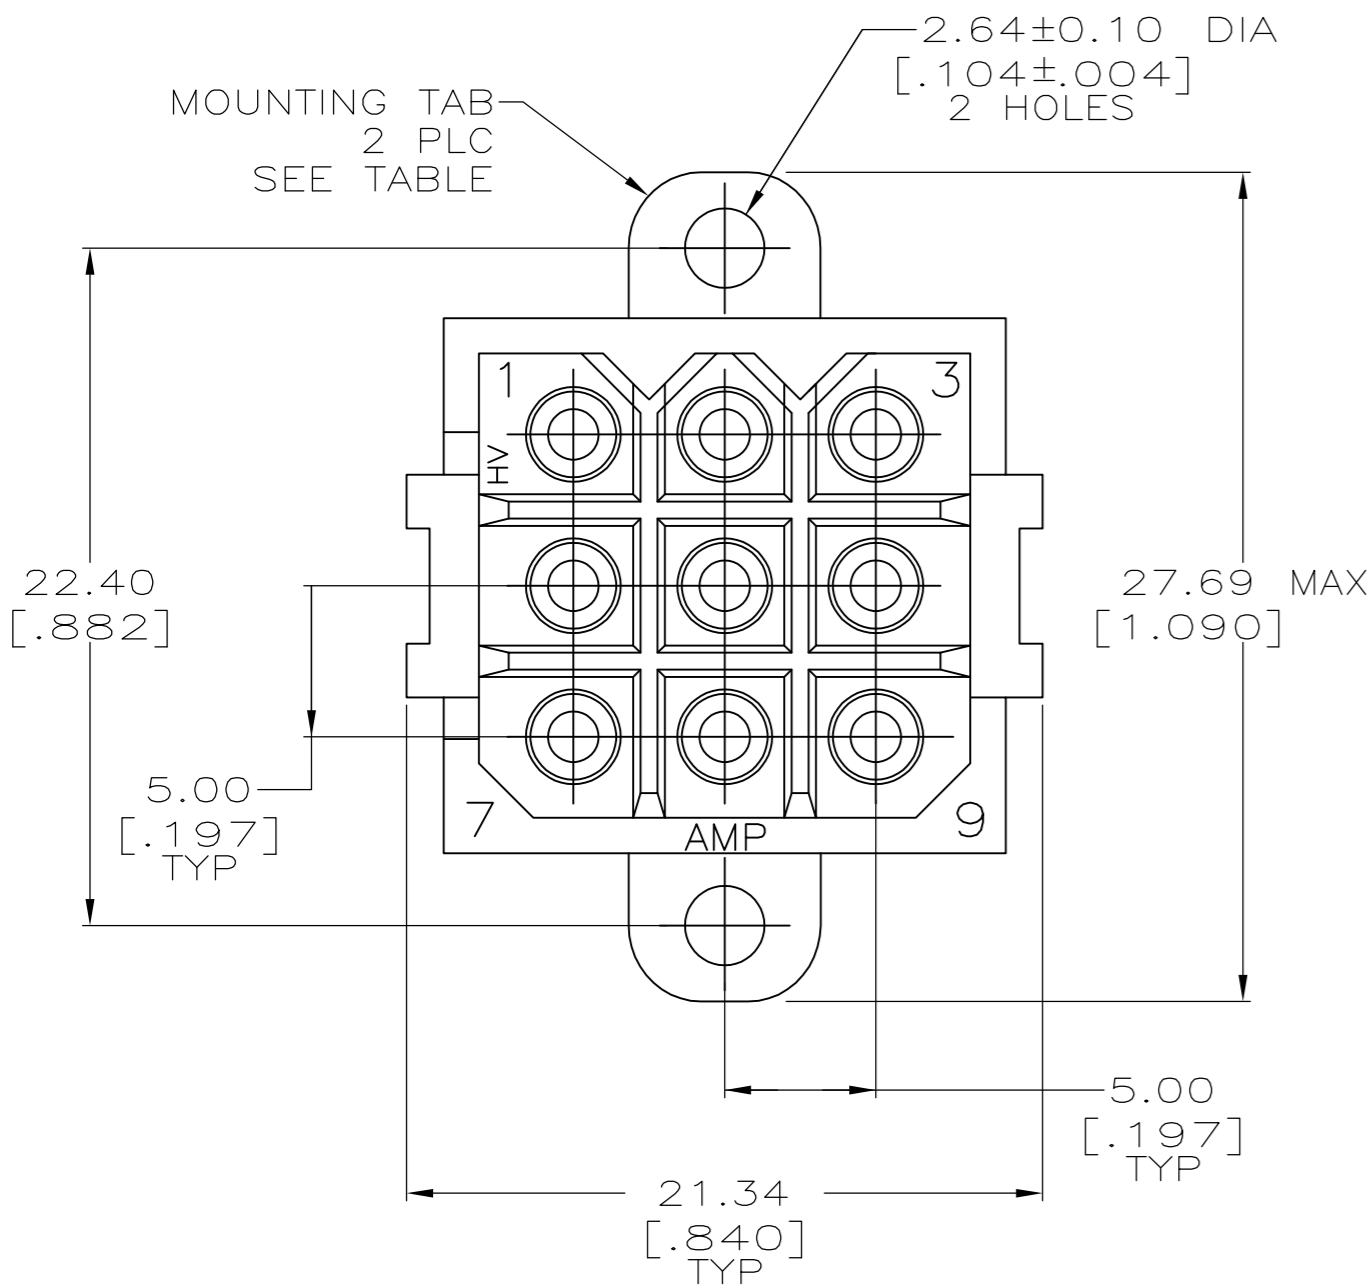

RECOMMENDED LAYOUT

- ① NYLON, UL 94-VO RATED, RED.
- ② PHOSPHOR BRONZE.
- ③ 3.81um [.000150] MIN TIN-LEAD OVER 1.27um [.000050] MIN NICKEL.
- ④ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN-LEAD FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.
- ⑤ 3.81um [.000150] MIN TIN OVER 1.27um [.000050] MIN NICKEL.
- ⑥ 0.76um [.000030] MIN GOLD FOR A LENGTH OF 4.95 [.195] MIN FROM MATING END, 3.81um [.000150] MIN TIN FOR A LENGTH OF 4.88 [.192] MIN ON OPPOSITE END, BOTH OVER 1.27um [.000050] MIN NICKEL.

⑥	NO	1-207526-0
⑥	YES	207526-9
⑤	NO	207526-8
⑤	YES	207526-7
④	NO	207526-4
④	YES	207526-3
③	NO	207526-2
③	YES	207526-1
CONTACT FINISH		PART NO
MOUNTING TABS		

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN	03/20/92	<b>STE</b> TE Connectivity	
		L.SIPE	3-25-92		
DIMENSIONS: INCHES		CHK	R.STONE	NAME	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD	-	PRODUCT SPEC	
0 PLC ± -		APPLICATION SPEC		108-10033	
1 PLC ± -		WEIGHT		SIZE	
2 PLC ± 0.25 [.010]		A2		CAGE CODE	
3 PLC ± -		00779		DRAWING NO	
4 PLC ± -		C=207526		RESTRICTED TO	
ANGLES ± -		CUSTOMER DRAWING		SCALE	
MATERIAL HOUSING: 1		CONTACT: SEE TABLE		4:1	
				SHEET 1 of 1	
				REV M1	