
207438-3 - ACTIVE

TE Internal #: 207438-3 Connector Contacts, Pin, Tin, None, 250 VAC, Locking Lance Contact Retention, Wire-to-Wire, Discrete Wire, 28 – 22 AWG Wire Size

View on TE.com >

Connectors > Rectangular Connectors > Connector Contacts

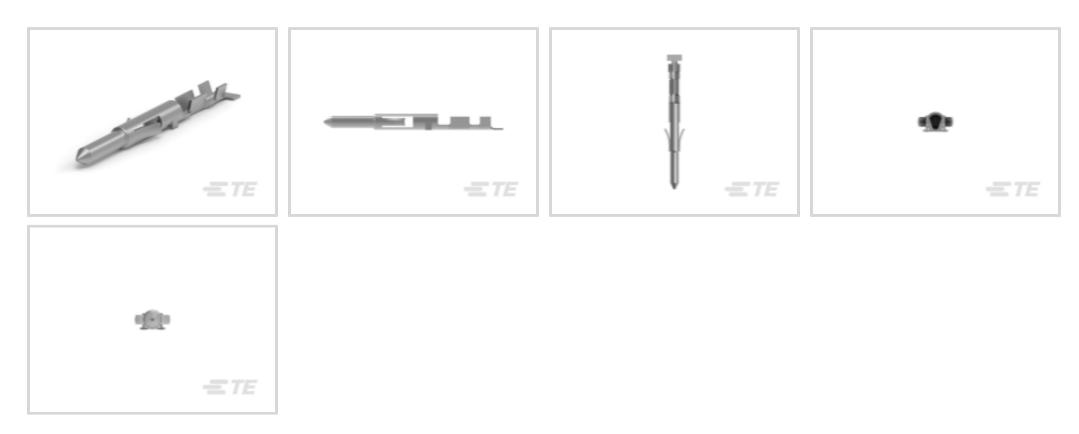

Contact Type: Pin

Contact Mating Area Plating Material: Tin

Wire Contact Termination Area Plating Material: None

Operating Voltage: 250 VAC

Contact Retention Within Housing: With

Features

Product Type Features



Connector System	Wire-to-Wire
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Compatible With Wire & Cable Type	Discrete Wire
Electrical Characteristics	
Test Current	10 A
Operating Voltage	250 VAC
Contact Features	
Contact Diameter	1.93 mm[.058 in]
Contact Type	Pin
Contact Mating Area Plating Material	Tin
Wire Contact Termination Area Plating Material	None
Contact Retention Within Housing	With
Contact Base Material	Brass

Connector Contacts, Pin, Tin, None, 250 VAC, Locking Lance Contact Retention, Wireto-Wire, Discrete Wire, 28 – 22 AWG Wire Size



Contact Current Rating (Max)	10 A
Termination Features	
Termination End Plating Material	Tin
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Contact Retention Type Within Housing	Locking Lance
Connector Mounting Type	Cable Mount (Free-Hanging)
Dimensions	
Accepts Wire Insulation Diameter Range	.91 – 1.37 mm[.036 – .054 in]
Wire Size	.08 – .34 mm²
Usage Conditions	
Operating Temperature Range	-55 – 105 °C[-67 – 221 °F]
Operation/Application	
High Current	No
For Use With	CPC Connectors
Circuit Application	Signal

Packaging Features

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not reviewed for solder process capability

Connector Contacts, Pin, Tin, None, 250 VAC, Locking Lance Contact Retention, Wireto-Wire, Discrete Wire, 28 – 22 AWG Wire Size



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought



Connector Contacts, Pin, Tin, None, 250 VAC, Locking Lance Contact Retention, Wireto-Wire, Discrete Wire, 28 – 22 AWG Wire Size





Documents

Product Drawings CONTACT,PIN

English

CAD Files

Customer View Model

ENG_CVM_207438-3_H.2d_dxf.zip

English

3D PDF

English

Customer View Model

ENG_CVM_207438-3_H.3d_igs.zip

English

Customer View Model

ENG_CVM_207438-3_H.3d_stp.zip

English

3D PDF

3D

Customer View Model

ENG_CVM_CVM_207438-3_AB.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_207438-3_AB.3d_igs.zip

English

Customer View Model ENG_CVM_CVM_207438-3_AB.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Product Environmental Compliance

TE Material Declaration

English

C For support call+1 800 522 6752

Connector Contacts, Pin, Tin, None, 250 VAC, Locking Lance Contact Retention, Wireto-Wire, Discrete Wire, 28 – 22 AWG Wire Size



Instruction Sheets Instruction Sheet (U.S.)

English

Application and Maintenance for Hand Crimping Tool

English