


Economy Power 2.5 TE Internal #: 1969567-8 Housing, Plug, Wire-to-Wire, 8 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5

View on TE.com >

Connectors > PCB Connectors > Wire-to-Board Connectors > Wire-to-Board Connector Assemblies & Housings

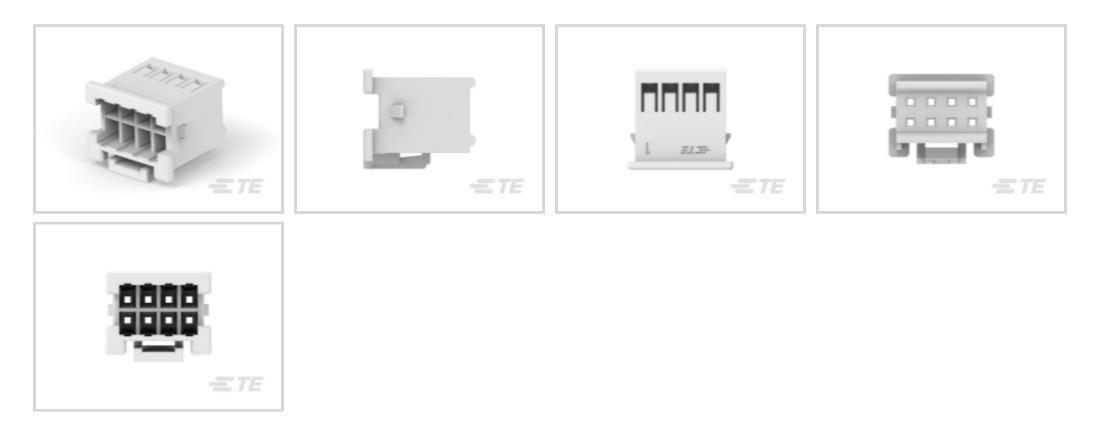

Connector Product Type: Housing Connector & Housing Type: Plug Connector System: Wire-to-Wire Number of Positions: 8 Centerline (Pitch): 2.5 mm [.098 in]

Features



Product Type Features

Connector Product Type	Housing			
Connector & Housing Type	Plug			
Connector System	Wire-to-Wire			
Sealable	No			
Connector & Contact Terminates To	Wire & Cable			
Configuration Features				
Number of Positions	8			
Number of Rows	2			
Electrical Characteristics				
Operating Voltage	250 VAC			
Contact Features				
Contact Type	Socket			
Contact Current Rating (Max)	7.5 A			

Housing, Plug, Wire-to-Wire, 8 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Termination Features

Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	Without
Panel Mount Feature	Without
PCB Mount Retention	Without
Mating Retention Type	Latch
Mating Retention	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Housing Entry Configuration	Both Ends Closed
Housing Material	Nylon - GF
Centerline (Pitch)	2.5 mm[.098 in]
Housing Color	Natural
Dimensions	
Connector Length	11.04 mm[.435 in]
Connector Height	8.3 mm[.326 in]
Connector Width	12.32 mm[.485 in]
Accepts Wire Insulation Diameter Range	1.3 – 1.7 mm[.051 – .067 in]
Wire Size	.13 – .33 mm²
Row-to-Row Spacing	2.5 mm[.09 in]
Usage Conditions	
Operating Temperature Range	-25 – 105 °C[-13 – 221 °F]
Operation/Application	
Circuit Application	Power & Signal
Industry Standards	
Glow Wire Rating	Glow Wire
UL Flammability Rating	UL 94V-0
Packaging Features	
Packaging Quantity	3200
Packaging Method	Bag

Housing, Plug, Wire-to-Wire, 8 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Housing, Plug, Wire-to-Wire, 8 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



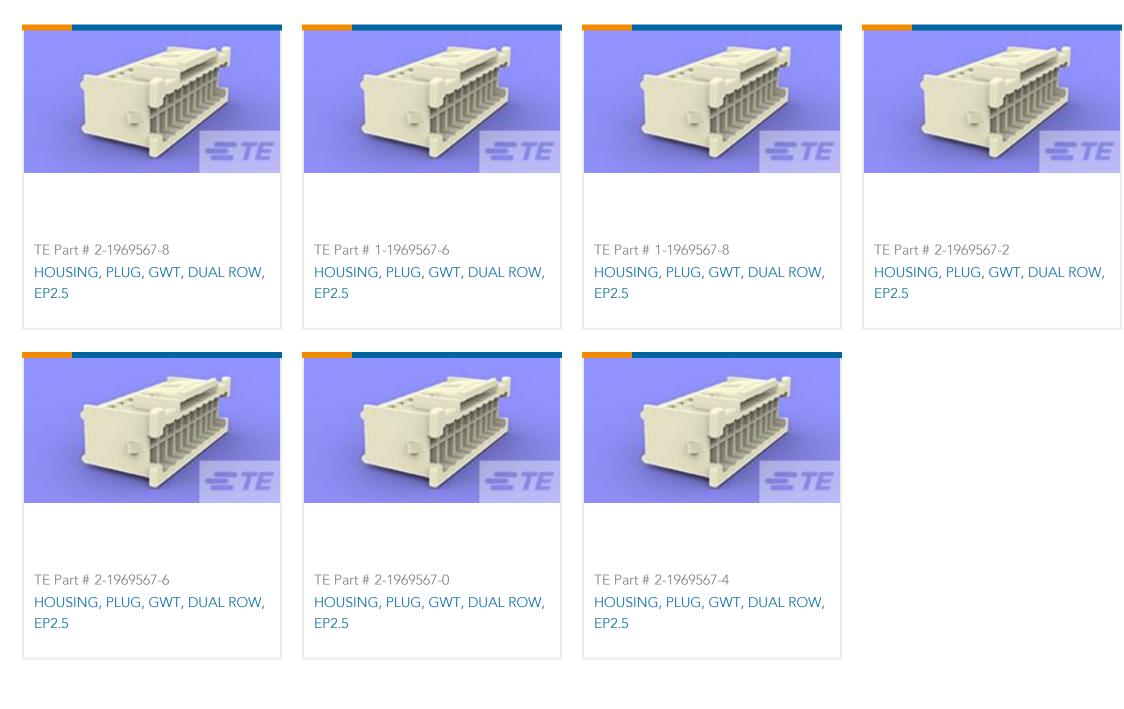

Also in the Series | Economy Power 2.5



Insertion & Extraction To




PCB Headers & Receptacles(210)





Rectangular Power Connectors(43)

Insertion & Extraction Tools(1)	PCB Headers & Receptacles(210)	PCB Latches, Locks & Retainers(49)	Rectangular Power Connectors(43)

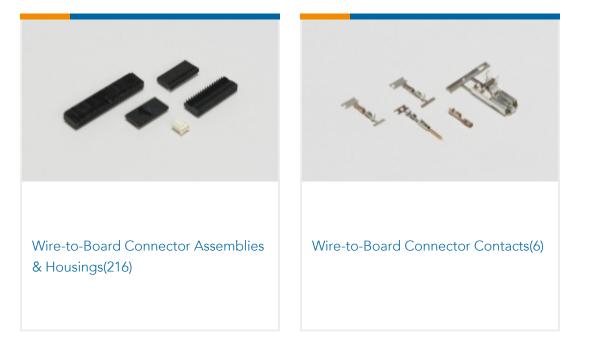


Customers Also Bought



Housing, Plug, Wire-to-Wire, 8 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



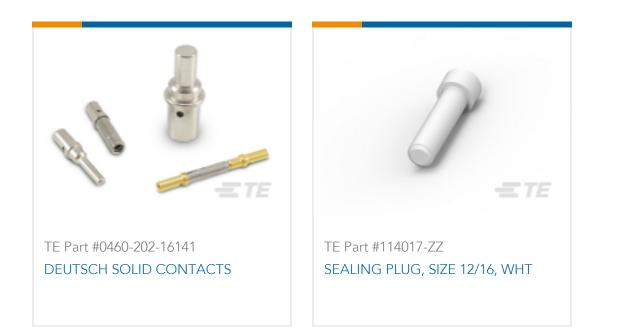

Documents

Product Drawings HOUSING, PLUG, GWT, DUAL ROW, EP2.5

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_1969567-8_B.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1969567-8_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1969567-8_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 7-1773461-6_EP2.5_Connector_Series

English

Product Specifications

Application Specification

English

Product Environmental Compliance MD_1969567-8_03232018646_dmtec

English

MD_1969567-8_03232018646_dmtec

English

Instruction Sheets Instruction Sheet (U.S.)

English

Agency Approvals

& For support call+1 800 522 6752

Housing, Plug, Wire-to-Wire, 8 Position, 2.5 mm [.098 in] Centerline, Crimp, 2 Row, Natural, Mating Retention, Wire & Cable, Economy Power 2.5



VDE Certificate

English