


Data sheet | Item number: 216-206

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue

www.wago.com/216-206



Color: 

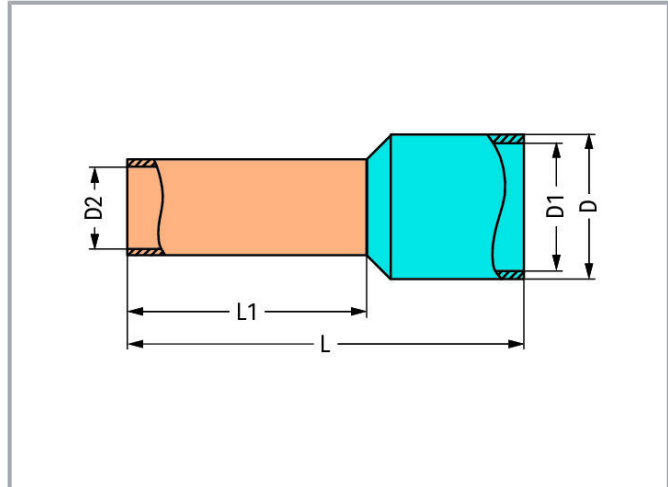

Data

Technical data

Main product function	Ferrule
Sleeve cross-section (AWG)	14 AWG

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG
Hansastr. 27
32423 Minden
Phone: +49571 887-0 | Fax: +49571 887-169
Email: info.de@wago.com | Web: www.wago.com

Do you have any questions about our products?
We are always happy to take your call at +49 (571) 887-44222.



Sleeve for	2.5 mm ²
------------	---------------------

Connection data

Strip length	10 mm / 0.39 inch
--------------	-------------------

Physical data

Length	15 mm
--------	-------

Length 1	8 mm
----------	------

Diameter	4.7 mm
----------	--------

Diameter 1	4.2 mm
------------	--------

Diameter 2	2.2 mm
------------	--------

Material data

Color	blue
-------	------

Fire load	0.002 MJ
-----------	----------

Weight	0.2 g
--------	-------

Commercial data

Product Group	2 (Terminal Block Accessories)
---------------	--------------------------------

PU (SPU)	1000 (100) Stück
----------	------------------

Packaging type	box
----------------	-----

Country of origin	DE
-------------------	----

GTIN	4017332277518
------	---------------

Customs tariff number	85369010000
-----------------------	-------------

Downloads**Documentation****Bid Text**

216-206 X81 - Datei	2019 Feb 19	xml 2.9 kB	Download
------------------------	-------------	---------------	----------

216-206 doc - Datei	2017 Sep 11	doc 25.1 kB	Download
------------------------	-------------	----------------	----------

Subject to changes. Please also observe the further product documentation!

Environmental Product Compliance

Compliance Search

Environmental Product Compliance 216-206

[URL](#)


[Download](#)

Ferrule; Sleeve for 2.5 mm² / AWG 14; insulated; electro-tin plated; blue

Installation Notes



A perfect gas-tight crimp – both electrically and mechanically reliable

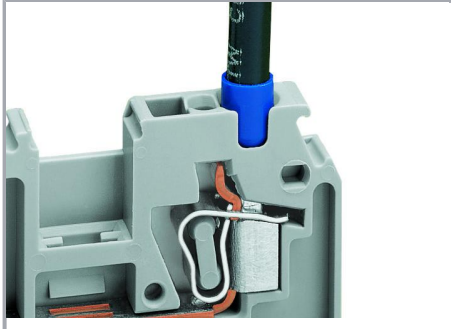

Using a 12 AWG conductor with ferrule (Item No. 216-206).

Subject to changes. Please also observe the further product documentation!