
Component-to-wire connectors

3 way female housings for 1.5 mm terminals

Features

- High density, reduced size housings
- Terminal position assurance (T.P.A.)
- Several colour codings available

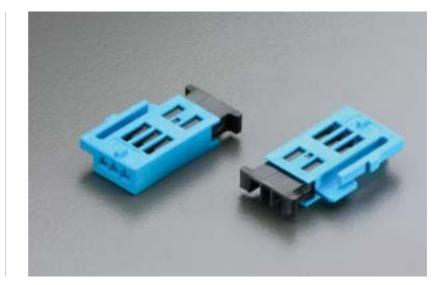

Performance characteristics

- Temperature range: from -40°C to +125°C
- Contact retention force:
 > 65 N for 3 pos.
- Contact insertion force: < 5 N
- Connector mating force: < 30 N

Construction

Housing material: PBT

Tooling

T.P.A. removal tool: 210S043Terminal removal tool: 210S041


Connector compatibility

- Usable terminals:
- Sicma-2 1.5 mm female terminals - Sicma-3 1.5 mm female terminals

Part Numbers	No. of position	Terminal size	Colour
210 PC032S9007	3	1.5 mm	White
210 PC032S0007	З	1.5 mm	Black
210 PC032S8007	З	1.5 mm	Grey
210 PC032S6007	З	1.5 mm	Blue
210 PC032S7007	З	1.5 mm	Violet



3 way female housings for 1.5 mm terminals

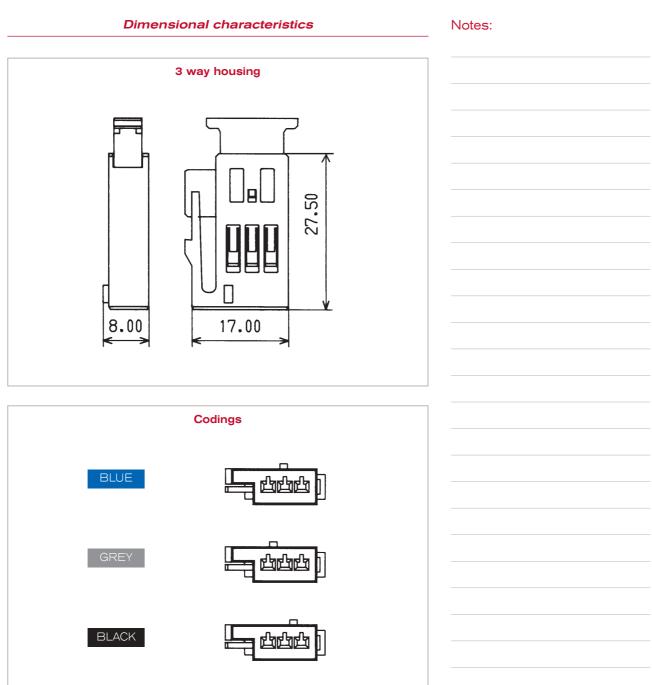

jeget

Erefred

WHITE

VIOLET