


### AMP | AMP M Series

TE Internal #: 213522-1 Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable, 34 Position, .15 in [3.81 mm] Centerline, Wire & Cable, UL 94V-0, AMP M Series

#### View on TE.com >

#### Connectors > Power Connectors > Rectangular Power > Rectangular Power Connectors

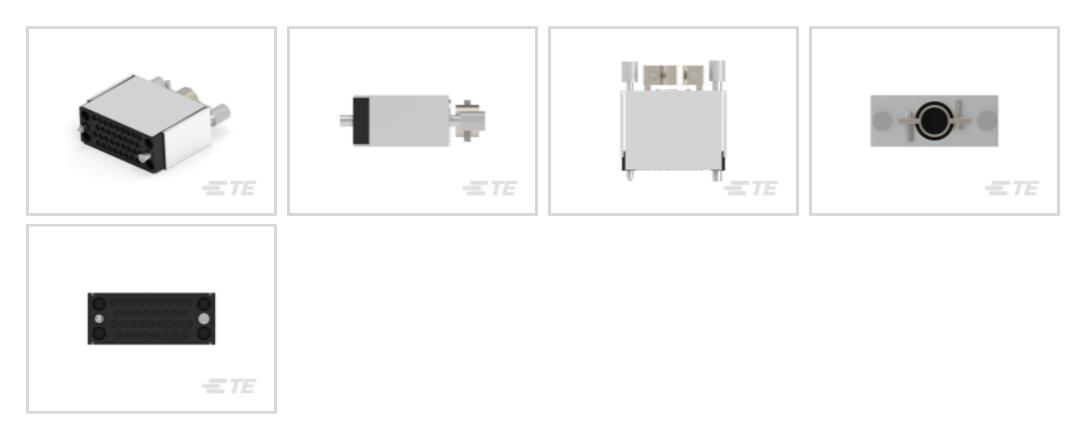

Rectangular Power Connector Type: Housing Connector & Housing Type: Receptacle Connector System: Cable-to-Cable

Number of Positions: 34

Centerline (Pitch): 3.81 mm [.15 in ]

# Features



### Product Type Features

Assembly Requirement	Unassembled Kit				
Rectangular Power Connector Type	Housing				
Connector & Housing Type	Receptacle				
Connector System	Cable-to-Cable				
Sealable	No				
Connector & Contact Terminates To	Wire & Cable				
Configuration Features					
Number of Positions	34				
Number of Power Positions	4				
Number of Signal Positions	34				
Number of Rows	4				
Electrical Characteristics					
Operating Voltage	250 VDC				
Contact Features					

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable, 34 Position, . 15 in [3.81 mm] Centerline, Wire & Cable, UL 94V-0, AMP M Series



Contact Current Rating (Max)	16 A
Contact Retention Within Housing	With
Contact Type	Socket
Fermination Features	
Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Strain Relief	With
Contact Retention Type Within Housing	Locking Spring
Panel Mount Feature	Without
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	3.81 mm[.15 in]
Housing Color	Black
Housing Material	Phenolic GF
Dimensions	
Accepts Cable Diameter (Max)	13.83 mm[.544 in]
Wire Size	.05 – 2 mm²
Row-to-Row Spacing	4.57 mm[.18 in]
Height	52.07 mm[2.05 in]
Width	21.03 mm[.828 in]
Jsage Conditions	
Operating Temperature Range	-55 – 150 °C[-67 – 302 °F]
Operation/Application	
Circuit Application	Power & Signal
ndustry Standards	
UL Flammability Rating	UL 94V-0
Glow Wire Rating	Standard Part - Not Glow Wire
Packaging Features	
Packaging Method	Bag
Packaging Quantity	1

**C** For support call+1 800 522 6752

07/23/2022 06:00PM | Page 2

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable, 34 Position, . 15 in [3.81 mm] Centerline, Wire & Cable, UL 94V-0, AMP M Series



#### For Use With

Plug Connector Kit

## Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) Does not contain REACH SVHC
Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach


# **Compatible Parts**




Also in the Series AMP M Series

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable, 34 Position, . 15 in [3.81 mm] Centerline, Wire & Cable, UL 94V-0, AMP M Series



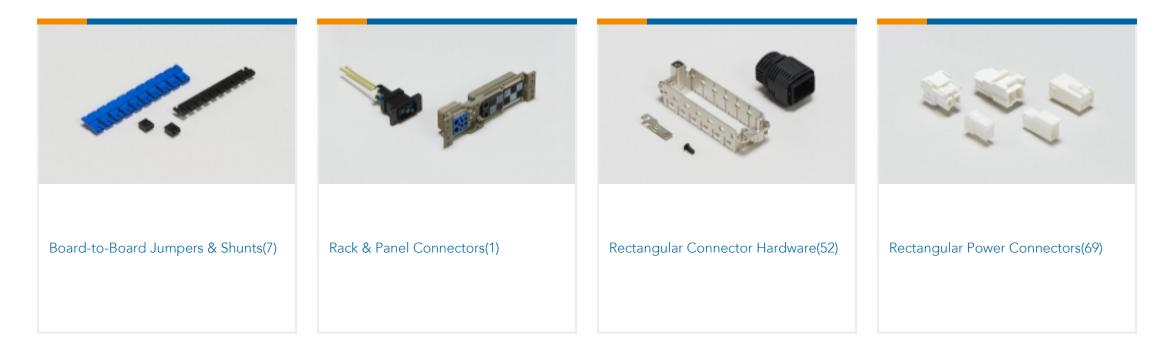

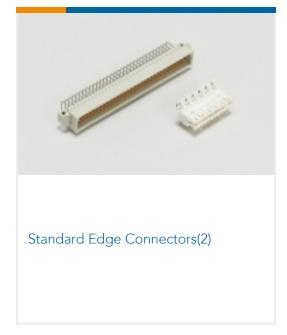


# Customers Also Bought



50 50SR CABLE PLUG ASSY	TE Part #1-967623-1 TIMER, CONNECTOR HOUSING	III+ SKT,18-16,30AU/FL,STRIP	ULTRAFAST 250 ASSY REC 22-18 TPBR LP
		= TE	
TE Part #3-178139-2 DYNAMIC 3200 HDR H 6P ASSY	TE Part #178803-7 DYNAMIC D3100D TAB HSG PM 16P	TE Part #175285-2 DYNAMIC D-3 TAB CONT. M AU 0.38	TE Part #182794-000 TTMS-19.0-9

# Documents

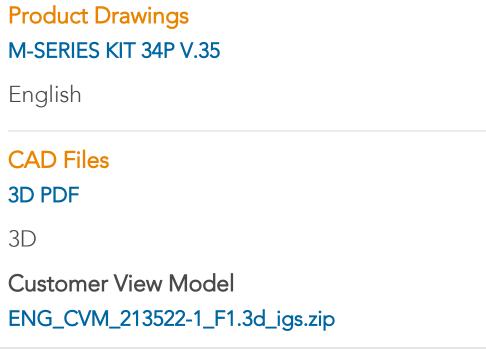

**C** For support call+1 800 522 6752

Rectangular Power Connectors, Housing, Receptacle, Cable-to-Cable, 34 Position, . 15 in [3.81 mm] Centerline, Wire & Cable, UL 94V-0, AMP M Series



English

Customer View Model

ENG\_CVM\_213522-1\_F1.3d\_stp.zip

English

Customer View Model

ENG\_CVM\_213522-1\_F1.2d\_dxf.zip

English

3D PDF

English

3D PDF

3D

Customer View Model

ENG\_CVM\_CVM\_213522-1\_J.2d\_dxf.zip

English

**Customer View Model** 

ENG\_CVM\_CVM\_213522-1\_J.3d\_igs.zip

English

Customer View Model

ENG\_CVM\_CVM\_213522-1\_J.3d\_stp.zip

English

By downloading the CAD file I accept and agree to the Terms and Conditions of use

Datasheets & Catalog Pages M\_SERIES\_PIN\_AND\_SOCKET\_CONNECTORS

English