

2329915-1 ✓ ACTIVE

[Power Versa-Lock](#) | [Power Versa-Lock 5.0](#)

TE Internal #: 2329915-1

Power Contacts, Contact, 600 VAC, 600 VDC, Pre-Tin, 26 – 22 AWG


Wire Size, .13 – .3 mm² Wire Size, Wire-to-Wire, Wire & Cable,

Power Versa-Lock 5.0

[View on TE.com >](#)



Connectors > Power Connectors > Power Contacts

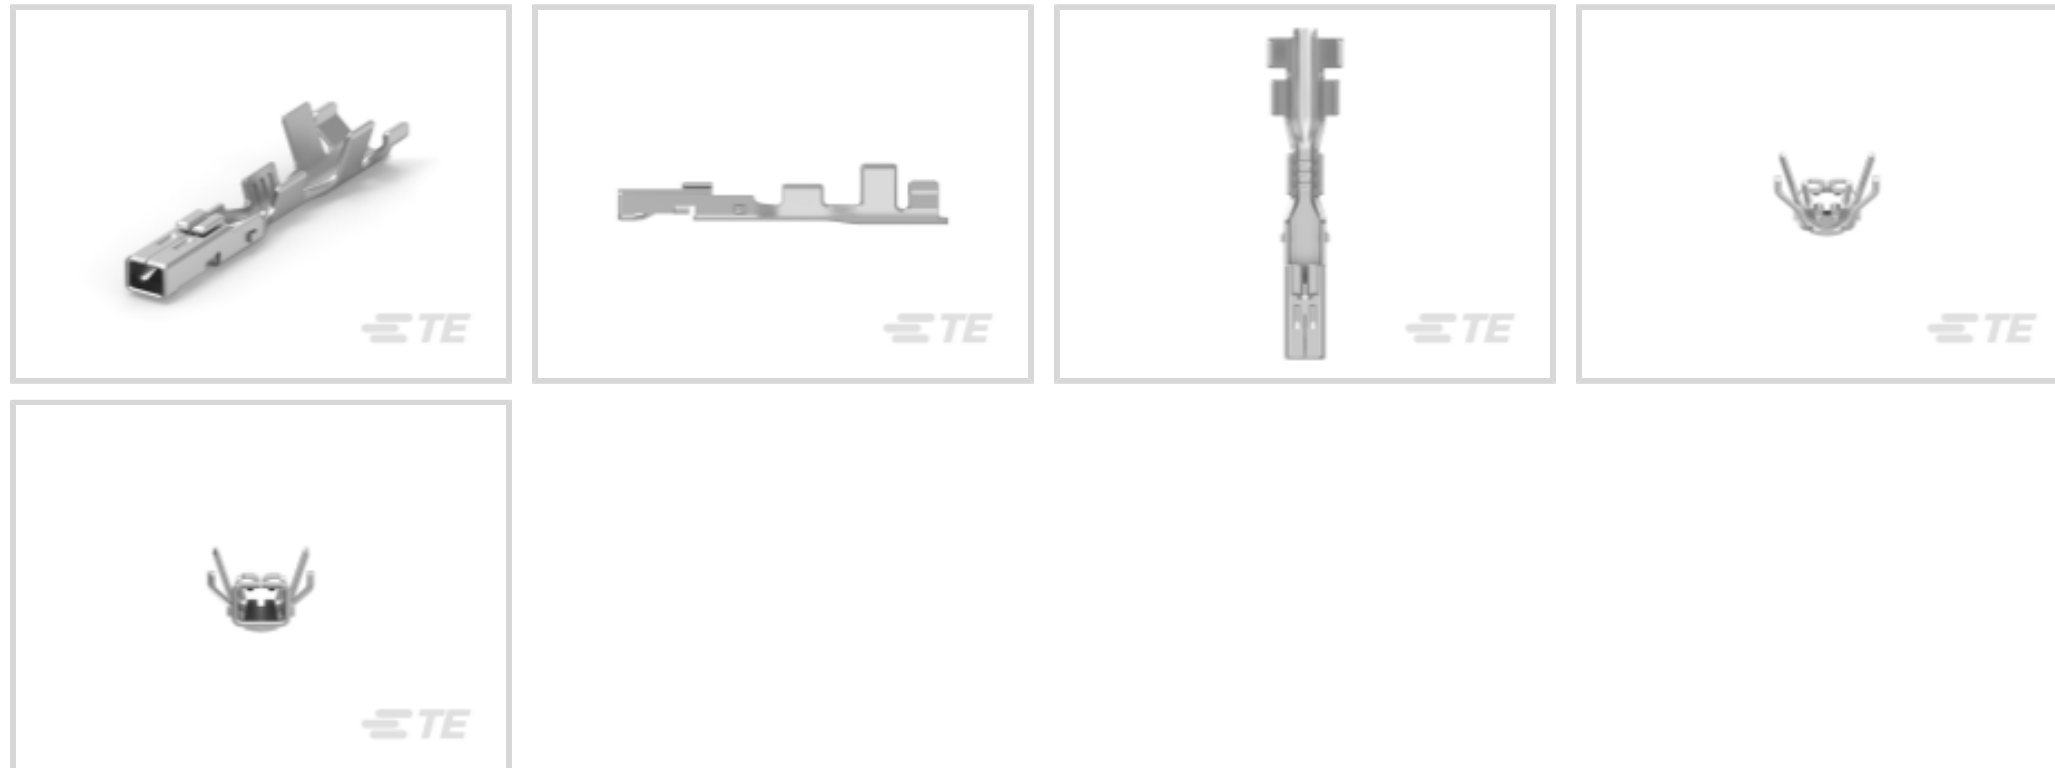

Power Contact Type: **Contact**

Operating Voltage: **600 VDC**

Contact Mating Area Plating Material: **Pre-Tin**

Wire Size: **26 – 22 AWG**

Features

Product Type Features

Power Contact Type	Contact
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable

Electrical Characteristics

Continuous Current Rating	5 A
Operating Voltage	600 VDC

Contact Features

Contact Mating Area Plating Material	Pre-Tin
Contact Current Rating (Max)	5 A
Contact Type	Receptacle
Contact Retention Within Housing	Without
Mating Tab Width	1.5 mm[.06 in]
Mating Tab Thickness	.5 mm[.02 in]
Contact Base Material	Copper Alloy



Wire Contact Termination Area Plating Material	Pre-Tin
--	---------

Contact Orientation	Straight
---------------------	----------

Termination Features

Termination Method to Wire & Cable	Crimp
------------------------------------	-------

Mechanical Attachment

Carrier Strip Mount Orientation	Side Feed
---------------------------------	-----------

Connector Mounting Type	Panel Mount
-------------------------	-------------

Wire Insulation Support	With
-------------------------	------

Dimensions

Wire Size	.13 – .3 mm ²
-----------	--------------------------

Accepts Wire Insulation Diameter Range	1.3 – 2.1 mm [.051 – .083 in]
--	-------------------------------

Usage Conditions

Operating Temperature Range	-30 – 105 °C [-22 – 221 °F]
-----------------------------	-----------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Packaging Features

Packaging Method	Reel
------------------	------

Other

Wire/Cable Type	Discrete Wire
-----------------	---------------

Wire Type	Stranded
-----------	----------

For Use With	Plug Housing
--------------	--------------

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
--	--

Halogen Content

Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free

Solder Process Capability

Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts



TE Part # 234912-1
EXT TOOL FOR POWER DBL LOK REC



TE Part # 1-2336229-6
Power Versa-Lock PLUG, 2X3 KEY A



TE Part # 1-2345728-1
Power Versa-Lock PLUG, 1X1 KEY A



TE Part # 1-2378159-2
Power Versa-Lock PLUG, 1X2 KEY A



TE Part # 1-2378159-3
Power Versa-Lock PLUG, 1X3 KEY A



TE Part # 2-2336229-6
Power Versa-Lock PLUG, 2X3 KEY B



TE Part # 2-2378159-2
Power Versa-Lock PLUG, 1X2 KEY B



TE Part # 2-2378159-3
Power Versa-Lock PLUG, 1X3 KEY B



TE Part # 2-2837358-1
OCEAN_2.0_Applicator-S-050F0900V



TE Part # 2-2837358-2
OCEAN_2.0_Applicator-S-050F0900VA



TE Part # 2837358-1
OCEAN_2.0_Applicator-S-050F0900V



TE Part # 2837358-2
OCEAN_2.0_Applicator-S-050F0900VA



TE Part # 3-2336229-6
Power Versa-Lock PLUG, 2X3 KEY C



TE Part # 3-2378159-2
Power Versa-Lock PLUG, 1X2 KEY C



TE Part # 3-2378159-3
Power Versa-Lock PLUG, 1X3 KEY C



TE Part # 4-2378159-2
Power Versa-Lock PLUG, 1X2 KEY D



TE Part # 5-2378159-2
Power Versa-Lock PLUG, 1X2 KEY E



TE Part # 6-2378159-2
Power Versa-Lock PLUG, 1X2 KEY F




TE Part # 7-2378159-2
Power Versa-Lock PLUG, 1X2 KEY G




TE Part # 7-2837358-1
OCEAN_2.0_Applicator-S-050F0900V


Also in the Series | Power Versa-Lock 5.0




Insertion & Extraction Tools(2)

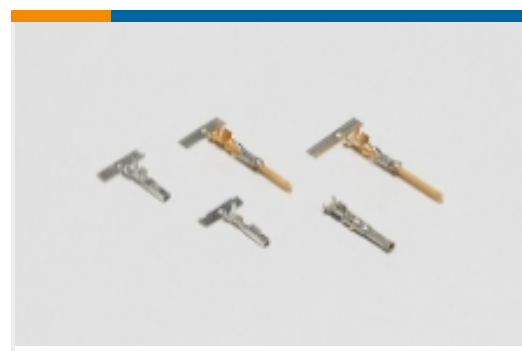


Power Contacts(12)




Rectangular Caps & Covers(3)



Rectangular Connector Locking(4)

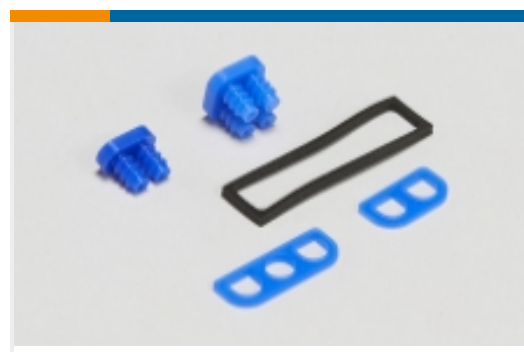

Rectangular Connector Seals(7)




Rectangular Power Connectors(33)

Customers Also Bought



TE Part #177901-1
POWER DBL LOCK PLUG HSG 6P

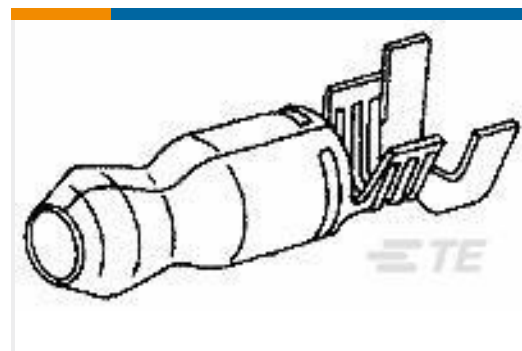




TE Part #60660-1
SHUR PLUG 180 18-14 AWG TPBR



TE Part #794440-1
MINI UMNL PIN SN 22-18 AWG



TE Part #63895-1
GROUND CLIP 14-18AWG ST

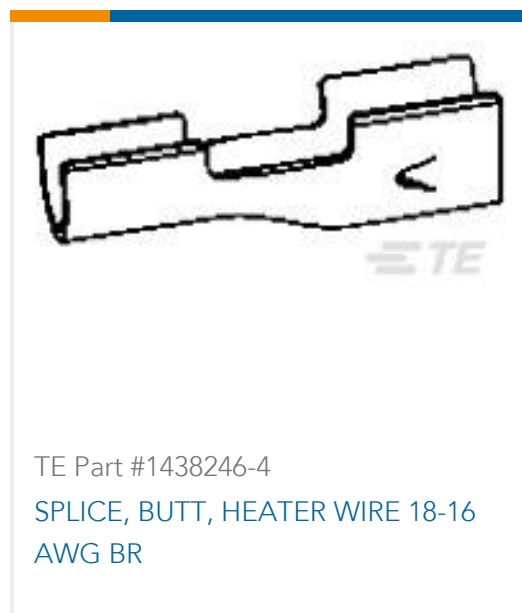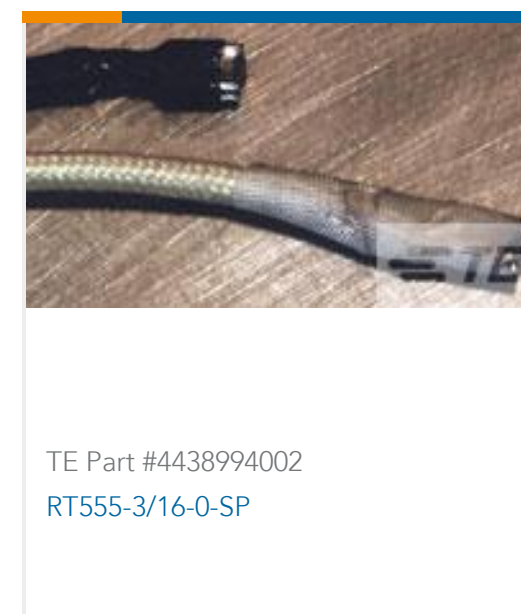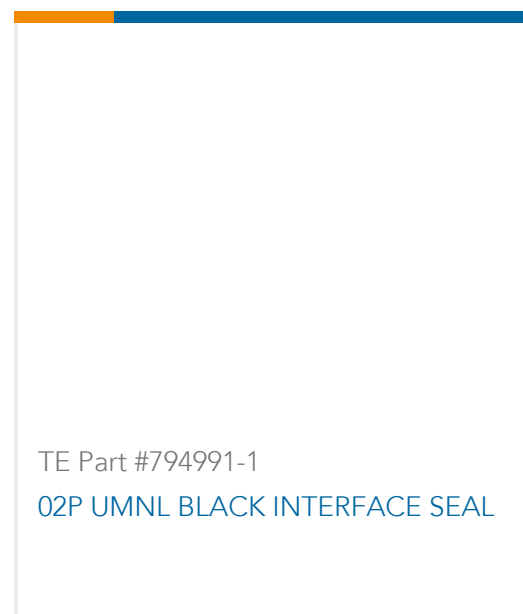

Documents

CAD Files

3D PDF

3D

Customer View Model

[ENG_CVM_CVM_2329915-1_A.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2329915-1_A.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2329915-1_A.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets

Instruction Sheet (U.S.)

English

2329915-1

Power Contacts, Contact, 600 VAC, 600 VDC, Pre-Tin, 26 – 22 AWG Wire Size, .13 – .3 mm² Wire Size, Wire-to-Wire, Wire & Cable, Power Versa-Lock 5.0

