

DIN 41612 EUROCARD CONNECTOR



2320 SERIES. Male IDC C and C/2 Type


Features

- Available in 32, 48 (Type C/2), 64 y 96 (Type C) circuits
- Insulator: PBT with glass filled (UL 94V-0)
- For mount in 9127 cable series (32 and 64 contacts) and 9084 cable series (48 and 96 contacts)
- Contact Material: Phosphor Bronze
- Contact Resistance: 30 milliohms. Max. AT 6V DC 0.3A
- Insulator Resistance: 1000 MΩ min. AT 500V DC
- Consult options with the sales Office

Dimensional Information

Ordering and Dimensional Information

CIRCUITOS	TIPO	CONFIGURACIÓN	CÓDIGOS	DIMENSIONES			
				A	B	C	D
32	C/2	a + c	2320 - T321	55.00 (2.165)	44.80 (1.763)	38.10 (1.500)	50.00 (1.968)
48	C/2	a + b + c	2320 - T481	55.00 (2.165)	44.80 (1.763)	38.10 (1.500)	50.00 (1.968)
64	C	a + c	2320 - T641	95.00 (3.740)	85.40 (3.362)	78.74 (3.100)	90.00 (3.543)
96	C	a + b + c	2320 - T961	95.00 (3.740)	85.40 (3.362)	78.74 (3.100)	90.00 (3.543)

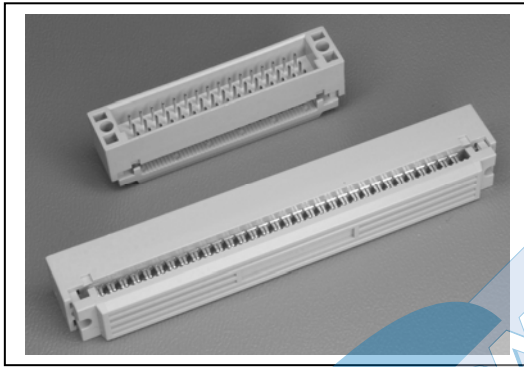

T = Acabado de los pines

- T = 2. Estando.
- T = 3. Flash de Oro sobre 1.27 μ de Ni.
- T = 4. 0.25 μ de Oro sobre 1.27 μ de Ni.
- T = 5. 0.50 μ de Oro sobre 1.27 μ de Ni.
- T = 6. 0.75 μ de Oro sobre 1.27 μ de Ni.

