

2.54mm (0.1") Female Header

5.0mm Profile, Dual Beam Folded Type
(Dual Row)


2227 Series

APPLICATION AND FEATURES

1. Bottom entry low profile 5mm height.
2. Designed for parallel and vertical board stacking.
3. Dual-beam folded contact and low insertion force.
4. Standoffs facilitate post soldering clean.
5. Dual row 04 to 80 contacts.

SPECIFICATIONS

Current Rating:	3 Amps
Insulator resistance:	5000 Megohms Min.
Contact resistance:	20 m ohm Max.
Dielectric withstanding:	AC 500 V
Operating Temperature:	-40°C to +105°C
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL 94V-0

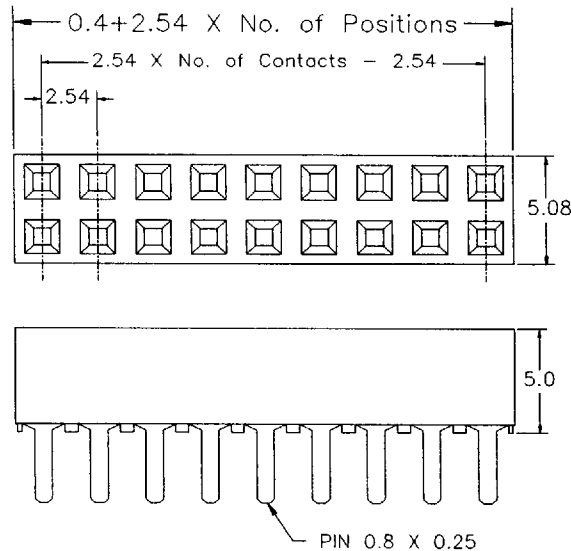

Order Information 2227 Series

Example: - - -

Series No.	Pitch Type	Number of Contacts	Contact Plating
<input type="text" value="2227"/>	3.81mm <input type="text" value="3"/>	<input type="text" value="04 to 80 Contacts"/>	Tin Plated <input type="text" value="01"/>
	5.08mm <input type="text" value="5"/>		Gold Plated
	7.62mm <input type="text" value="7"/>		Flash <input type="text" value="02"/>
			10 μ" <input type="text" value="10"/>
			30 μ" <input type="text" value="30"/>

SINGATRON ENT. CO., LTD. Tel.: (909) 464-1883 Fax.: (909) 464-1884

9011184 0000083 962

2.54mm (0.1") Female Header

5.0mm Profile, Dual Beam Folded Type

(Dual Row)

2227 Series

