

AMP | MQS

TE Internal #: 284223-5 Housing for Female Terminals, Wire-to-Wire, 24 Position, .1 in [2.54 mm] Centerline, Brown, Signal, Cable Mount (Free-Hanging), MQS View on TE.com >

Connectors > Automotive Connectors > Connector Housings > MQS, CONNECTOR HOUSING



Connector & Housing Type: Housing for Female Terminals

Mating Tab Width: .63 mm [.025 in]

Connector System: Wire-to-Wire

Number of Positions: 24

Centerline (Pitch): 2.54 mm [.1 in]

All MQS, CONNECTOR HOUSING (557)

Features

Product Type Features

Connector & Housing Shape

Connector & Housing Type

 Rectangular

Housing for Female Terminals



Connector System	Wire-to-Wire
Sealable	No
Hybrid Connector	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	24
Number of Rows	2
Electrical Characteristics	
Operating Voltage	24 VDC
Nominal Voltage Architecture	12 V, 24 V
Body Features	
Cable Exit Angle	90°
Body Material	PAGF
Primary Product Color	Brown
Contact Features	

Housing for Female Terminals, Wire-to-Wire, 24 Position, .1 in [2.54 mm] Centerline, Brown, Signal, Cable Mount (Free-Hanging), MQS



Contact Size	.63mm
Contact Type	Receptacle
Mating Tab Width	.63 mm[.025 in]
Mechanical Attachment	
Mounting Feature	Without
Terminal Position Assurance	No
Strain Relief	Without
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	2.54 mm[.1 in]
Dimensions	
Product Width	17.6 mm[.693 in]
Product Length	38.3 mm[1.508 in]
Product Height	39.9 mm[1.571 in]
Row-to-Row Spacing	5.2 mm[.205 in]

Usage Conditions

Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C[158 °F][167 °F][176 °F][185 °F][194 °F] [212 °F][221 °F]
Operating Temperature Range	-30 – 105 °C[-22 – 221 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Method	Box
Other	
Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant

C For support call+1 800 522 6752

Housing for Female Terminals, Wire-to-Wire, 24 Position, .1 in [2.54 mm] Centerline, Brown, Signal, Cable Mount (Free-Hanging), MQS



EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not applicable for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts




Also in the Series | MQS

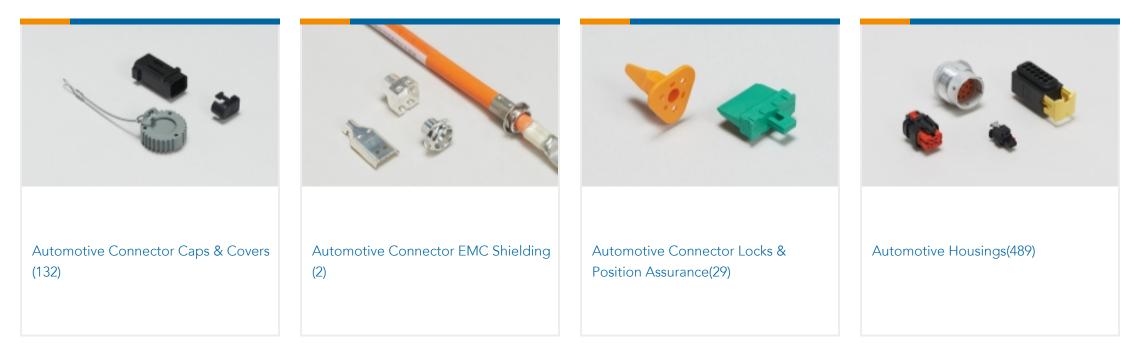

Housing for Female Terminals, Wire-to-Wire, 24 Position, .1 in [2.54 mm] Centerline, Brown, Signal, Cable Mount (Free-Hanging), MQS



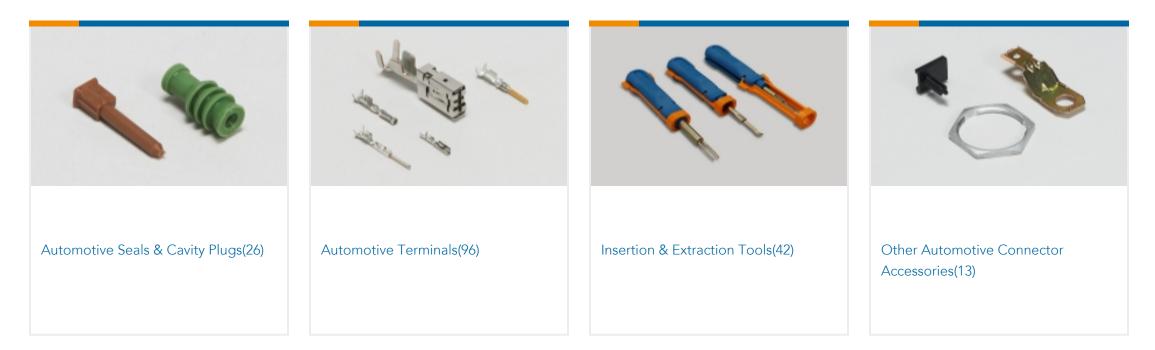



Customers Also Bought



090III 22P PLUG ASSY	4POS,0.64X0.64,TAB HSG,SLD	REAR DTB 040/090 18P PLUG ASSY	TCU 68P PLUG ASSY
TE Part #2188507-1 025/110 HYB 8P CAP ASS'Y	TE Part #2209816-2 CBW CH071 SAB CABLE ASSY(BU/BK, BU/WT)	TE Part #2337148-1 32POS,HYBRID,REC HSG ASSY, UNSLD,COD B	TE Part #2337148-4 32POS,HYBRID,REC HSG ASSY, UNSLD,COD E

TE Part #2360065-1 MIND-GWM P3011 VW AKII PIGTAIL	TE Part #3-2355506-1 2POS,MCON 1.2,REC HSG ASSY,SLD COD C),

Documents

Housing for Female Terminals, Wire-to-Wire, 24 Position, .1 in [2.54 mm] Centerline, Brown, Signal, Cable Mount (Free-Hanging), MQS



Product Drawings

24 POS. AIRBAG CONN. KIT ASS'Y

English

CAD Files

Customer View Model ENG_CVM_CVM_284223-5_B.2d_dxf.zip

English

3D PDF

3D

Customer View Model ENG_CVM_CVM_284223-5_B.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_284223-5_B.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Micro Quadlok Interconnection System (MQS)

English

Product Specifications Application Specification

English

Product Environmental Compliance

Product Compliance

English

Product Compliance

English

Instruction Sheets Instruction Sheet (non U.S.)

English