



Power lock industrial grade locking devices

Product description

2-pole, 3-wire grounding
20A, 125V/AC
Non-NEMA



23035N



23032N

Industrial grade, back wire plugs & connectors




Rating A	V/AC	Description	Cord diameter	Color	Plug catalog no.	Connector catalog no.
20	125	Nylon "dead front" design	0.33-0.66" (8.4-16.7mm)	GY	□ 23035N	□ 23032N

Power lock industrial grade locking devices

Product description

3-pole, 3-wire grounding
& non-grounding
20A, 125V/AC
Non-NEMA

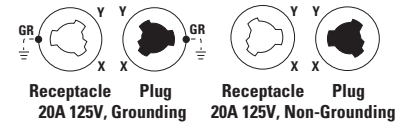

Industrial grade, back wire plugs & connectors



Rating A	V/AC	Description	Color	Flanged inlet	Flanged inlet w/ lid
20	125	Nylon "dead front" design	GY	□ 23005N	□ 23002N

Note: Also rated at 10A for 250V DC and 480V/AC

Industrial grade, receptacles



Rating A	V/AC	Description	Color	Single receptacle
20	125	Standard industrial	BK	□ 23000
		Grounding industrial, replacement only	BK	□ 23000G ¹⁾


¹⁾Only UL Listed

Dimensional information:
C-82, C-83

Plug & connector specification information:
Power lock: C-94
Receptacle specification information:
Power lock: C-95

Color information:

BK (Black), GY (Gray)



Compliances, specifications and availability are subject to change without notice.