


# PCB Terminal Strips, Series 227 and 740, Pin Spacings 5 mm / 0.197 in; 6.35 mm / 1/4 in

CAGE CLAMP®



2  
47

**Pin spacing 5 mm / 0.197 in**  
0.08 – 2.5 mm<sup>2</sup> | AWG 28 – 12  
250 V/4 kV/3 | 300 V, 10 A  
16 A



6 – 7 mm / 0.26 in

\* CCA@ NV


**Pin spacing 6.35 mm / 1/4 in**  
0.08 – 4 mm<sup>2</sup> | AWG 28 – 12  
250 V/4 kV/3, 16 A | 300 V, 10 A  
500 V/4 kV/2, 16 A | 300 V, 10 A

9 – 10 mm / 0.37 in

\* CCA@ BV

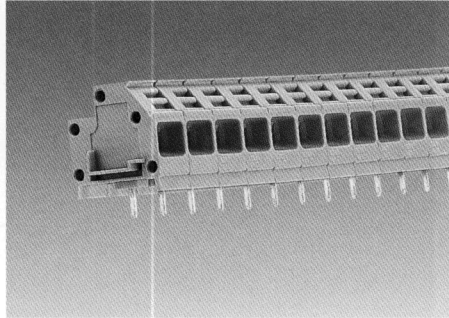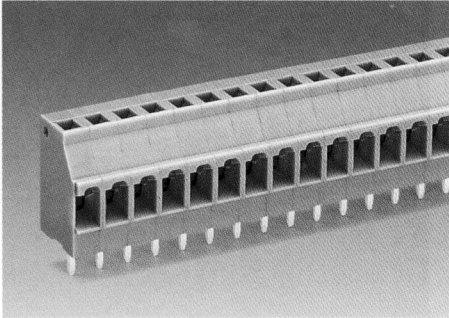

No. of poles	Item-No.	Pack.-unit pcs	No. of poles	Item-No.	Pack.-unit pcs
<b>Terminal strips, grey, standard lengths, 1 solder pin/pole</b>			<b>Terminal strips, grey, with end plate, standard lengths, solder pin 0.8 x 1.6 mm / 0.031 x 0.063 in</b>		
2	<b>740-102</b>	460 (4 x 115)	2	<b>227-552</b>	100
3	<b>740-103</b>	300 (4 x 75)	3	<b>227-553</b>	50
4	<b>740-104</b>	220 (4 x 55)	:	:	
5	<b>740-105</b>	180 (4 x 45)	:	:	
6	<b>740-106</b>	140 (4 x 35)	11	<b>227-561</b>	25
7	<b>740-107</b>	120 (4 x 30)	12	<b>227-562</b>	25
8	<b>740-108</b>	100 (4 x 25)	13	<b>227-563</b>	25
9	<b>740-109</b>	100 (4 x 25)	14	<b>227-564</b>	25
10	<b>740-110</b>	80 (4 x 20)	15	<b>227-565</b>	20
12	<b>740-112</b>	60 (4 x 15)	16	<b>227-566</b>	20
16	<b>740-116</b>	40 (4 x 10)	17	<b>227-567</b>	20
24	<b>740-124</b>	40 (4 x 10)	18	<b>227-568</b>	20
			19	<b>227-569</b>	20
			20	<b>227-570</b>	20
			21	<b>227-571</b>	10
			22	<b>227-572</b>	10
			23	<b>227-573</b>	10
			24	<b>227-574</b>	10
Additional item-Nos. for colored terminal strips			For assemblies in other lengths and colors, please contact factory		
blue	... / <b>000-006</b>				
green	... / <b>000-023</b>				
light grey	... / <b>000-021</b>				
Ordering example Terminal strip, 12 poles, green: <b>740-112/000-023</b>					
For other lengths, please contact factory					


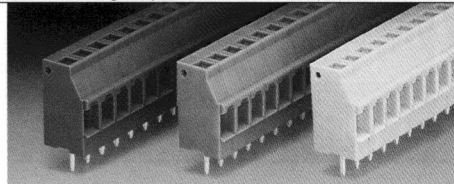


### Accessories



**Test plug, w. cable 500 mm / 1'7.7"**  
2 mm / 0.079 in Ø, red **210-136** 50  
2.3 mm / 0.091 in Ø, yel. **210-137** 50

### Dimensions (in mm)

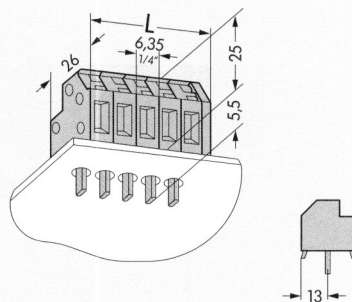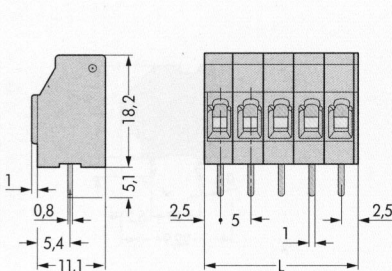

Diameter of drilled hole: 1.3<sup>+0.1</sup> mm  
L = No. of poles x pin spacing

Diameter of drilled hole: 2<sup>+0.1</sup> mm  
L = (No. of poles x 6.35 mm) + 5 mm

\* For further approvals with corresponding ratings see pages 10.3 ff.