



DDR4 DIMM

TE Internal #: 2309412-1

SO DIMM Sockets, Small Outline (SO), Stack Height .315 in [8 mm], Right Angle Module Orientation, Surface Mount Mount, Cable-to-Board, DDR4 DIMM

[View on TE.com >](#)

Connectors > Socket Connectors > Memory Sockets > SO DIMM Sockets > DDR4 SO DIMM SOCKETS



DRAM Type: **Small Outline (SO)**

Stack Height: **8 mm [.315 in]**

Module Orientation: **Right Angle**

PCB Mounting Style: **Surface Mount**

Connector System: **Cable-to-Board**

[All DDR4 SO DIMM SOCKETS \(39\)](#)

Features

Product Type Features

Center Post	Without
DRAM Type	Small Outline (SO)
Connector System	Cable-to-Board
Sealable	No
Connector & Contact Terminates To	Printed Circuit Board
Product Type	Socket

Configuration Features

Center Key	Offset Right
Number of Keys	1
Module Orientation	Right Angle
Number of Positions	260
Number of Rows	2
Keying	Reverse

Electrical Characteristics

DRAM Voltage	1.2 V
--------------	-------

Signal Characteristics



SGRAM Voltage	1.2 V
---------------	-------

Body Features

Retention Post Material	Stainless Steel
-------------------------	-----------------

Ejector Location	Both Ends
------------------	-----------

Latch Material	High Temperature Thermoplastic
----------------	--------------------------------

Retention Post Location	Both Ends
-------------------------	-----------

Module Key Type	Offset Right
-----------------	--------------

Ejector Type	Locking
--------------	---------

Connector Profile	High
-------------------	------

Contact Features

Socket Style	SO DIMM
--------------	---------

Contact Underplating Material	Nickel
-------------------------------	--------

PCB Contact Termination Area Plating Material	Gold Flash
---	------------

Contact Base Material	Copper Alloy
-----------------------	--------------

Contact Mating Area Plating Material	Gold Flash
--------------------------------------	------------

Contact Current Rating (Max)	.5 A
------------------------------	------

Socket Type	Memory Card
-------------	-------------

Termination Features

Insertion Style	Cam-In
-----------------	--------

Mechanical Attachment

PCB Mount Retention	With
---------------------	------

PCB Mount Retention Type	Solder Peg
--------------------------	------------

PCB Mounting Style	Surface Mount
--------------------	---------------

Connector Mounting Type	Board Mount
-------------------------	-------------

Housing Features

Centerline (Pitch)	.5 mm, 5.4 mm, 6.1 mm [.02 in]
--------------------	--------------------------------

Housing Color	Black
---------------	-------

Housing Material	High Temperature Thermoplastic
------------------	--------------------------------

Dimensions

Stack Height	8 mm [.315 in]
--------------	----------------

Row-to-Row Spacing	8.2 mm [.322 in]
--------------------	------------------

Usage Conditions



Operating Temperature Range	-55 – 85 °C[-67 – 185 °F]
-----------------------------	---------------------------

Operation/Application

Circuit Application	Power
---------------------	-------

Industry Standards

UL Flammability Rating	UL 94V-0
------------------------	----------

Packaging Features

Packaging Method	Tape & Reel
------------------	-------------

Packaging Quantity	500
--------------------	-----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Reflow solder capable to 260°C
---------------------------	--------------------------------


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | DDR4 DIMM

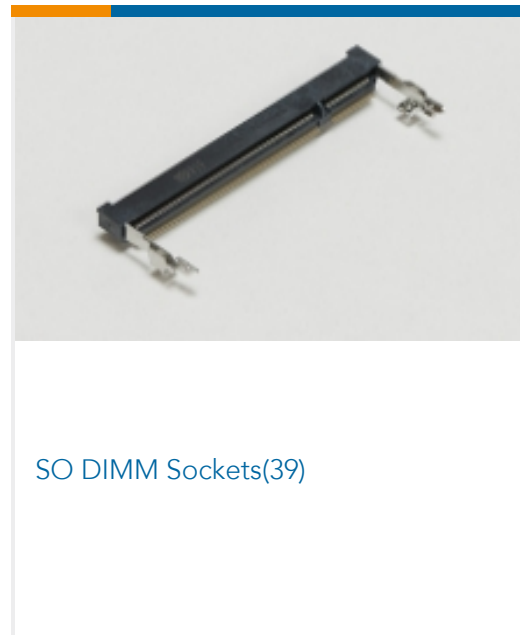

Customers Also Bought

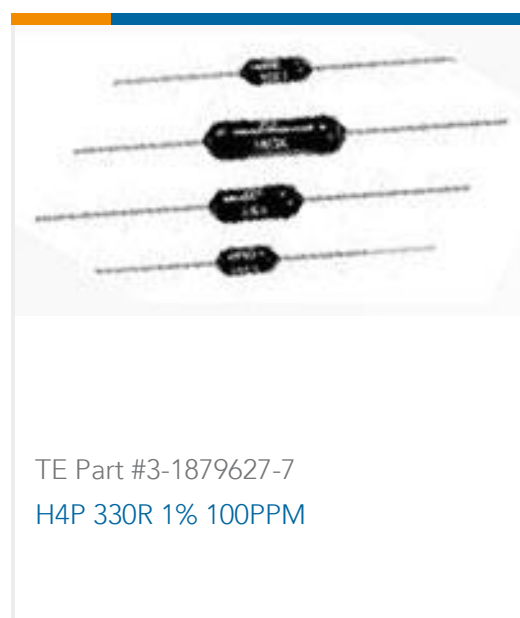

Documents

Product Drawings

DDR4 SODIMM 260P 8.0H RVS

English

CAD Files

3D PDF

3D



Customer View Model

[ENG_CVM_CVM_2309412-1_1.2d_dxf.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2309412-1_1.3d_igs.zip](#)

English

Customer View Model

[ENG_CVM_CVM_2309412-1_1.3d_stp.zip](#)

English

By downloading the CAD file I accept and agree to the [Terms and Conditions](#) of use.

Product Specifications

[Application Specification](#)

English

Product Environmental Compliance

[Product Compliance](#)

English

[Product Compliance](#)

English