
2297438-3 - ACTIVE

FASTIN-FASTON | FASTIN-FASTON 250

TE Internal #: 2297438-3 Crimp Terminal Housings, Tab, Tab Housing, 3 Position, Straight, UL 94V-0, Natural, Nylon, Contact Mating Retention, FASTIN-FASTON 250

View on TE.com >

Terminals & Splices > Terminal Housings, Insulation Sleeves & Blocks > Crimp Terminal Housings

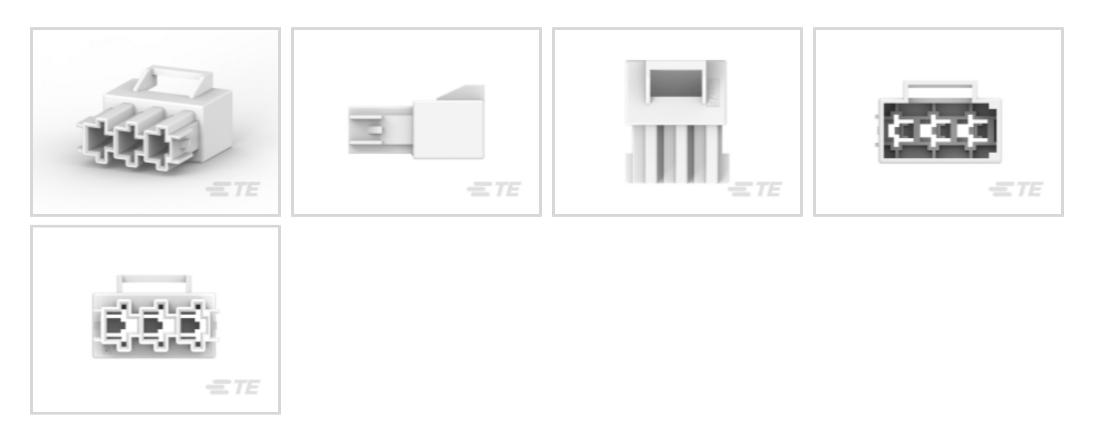

Terminal Type: Tab Housing Type: Tab Housing Number of Positions: 3 Terminal Orientation: Straight

UL Flammability Rating: UL 94V-0

Features



Product Type Features

Terminates To	Wire & Cable
Product Type	Terminal Housing
Glow Wire Rating	GWT 750°C (Without Flame)
Sealable	No
Connector System	Wire-to-Wire
Housing Type	Tab Housing
Insulated	No
Configuration Features	
Number of Positions	3
Body Features	
Primary Product Color	Natural
Contact Features	
Terminal Type	Tab
Terminal Orientation	Straight

Crimp Terminal Housings, Tab, Tab Housing, 3 Position, Straight, UL 94V-0, Natural, Nylon, Contact Mating Retention, FASTIN-FASTON 250



Contact Mating Retention	With
Mechanical Attachment	
Mating Retention Type	Latch
Mating Alignment	With
Crimp Terminal Housing Mounting Style	Cable Mount (Free-Hanging)
Housing Features	
Housing Material	Nylon
Centerline (Pitch)	7 mm[.276 in]
Dimensions	
Length	28.5 mm[1.12 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
For Use With	250 Series
Industry Standards	
UL Rating	Recognized

UL Flammability Rating

UL 94V-0

Packaging Features

Packaging Quantity	400	
--------------------	-----	--

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2022 (224) Candidate List Declared Against: JAN 2022 (223) SVHC > Threshold: Not Yet Reviewed
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability

C For support call+1 800 522 6752

Crimp Terminal Housings, Tab, Tab Housing, 3 Position, Straight, UL 94V-0, Natural, Nylon, Contact Mating Retention, FASTIN-FASTON 250



Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts







Also in the Series | FASTIN-FASTON 250

Crimp Terminal Housings, Tab, Tab Housing, 3 Position, Straight, UL 94V-0, Natural, Nylon, Contact Mating Retention, FASTIN-FASTON 250





Customers Also Bought



R	ETAINER, TPA, DUAL ROW, EP2.5	STD TIMER PLUG HSG 4P W/EXT. LOCKING	SDT-S-112DMR,0000B	250 HSG. PL MKII REC. 9mm 2P NAT	
	STILLET TE				
	E Part #2331088-1 50 HSG. PL MKII REC. 13mm 2P NAT	TE Part #3-2232511-5 5P, RAST 5 TAB HEADER, THV			

Documents

Product Drawings MMF,FREE HANGING,CAP HOUSING

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2297438-3_A4.2d_dxf.zip

Crimp Terminal Housings, Tab, Tab Housing, 3 Position, Straight, UL 94V-0, Natural, Nylon, Contact Mating Retention, FASTIN-FASTON 250



English

Customer View Model ENG_CVM_CVM_2297438-3_A4.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2297438-3_A4.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Multi-Position Mounted FASTIN-FASTON Housings QRG

English

Product Specifications

Product Specification

English

Agency Approvals UL Report

English